

### STANDARD MATERIALS AND CONSTRUCTION

**FRAME:** 2" Deep x .081" thick (nominal) extruded aluminum channel.

**BLADE:** .060" thick (nominal) formed aluminum. Flat, single web design.

**BEARINGS:** Oilite bronze.

**SHAFTS:** 1/2" dia. plated steel.

**SEALS:** Polyurethane on jambs.

**FINISH:** Mill.

### OPTIONS

Other materials: galvanized steel, stainless steel, bronze, copper, etc.

Other finishes: Baked enamel, Kynar, Anodized



Bearings: Nylon, Celcon, ball, etc.

### NOTES


1. Nominal deductions will be made to the opening size given.
2. Dampers less than 12" wide have a fixed, permanently extended 6" axle shaft.
3. Units up to 48" wide will ship assembled.
4. Approximate shipping weight is 4.5 lbs./sq.ft.

### DAMPER SIZES

Min Panel	Max Single Panel
6"W x 3"H	36"W x 12"H

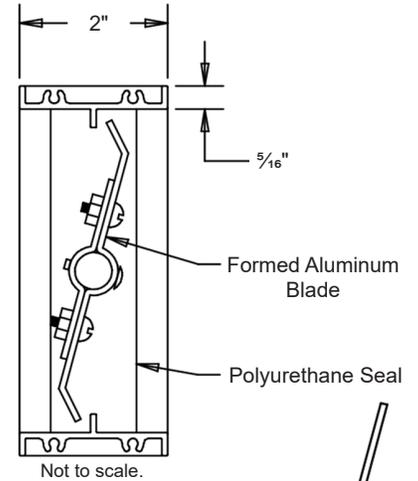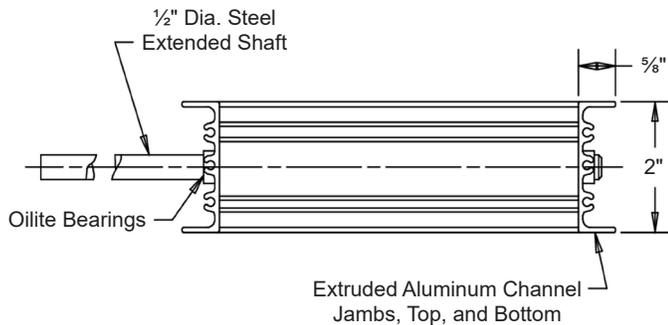

Blade form for 2 7/8" and narrower blades.

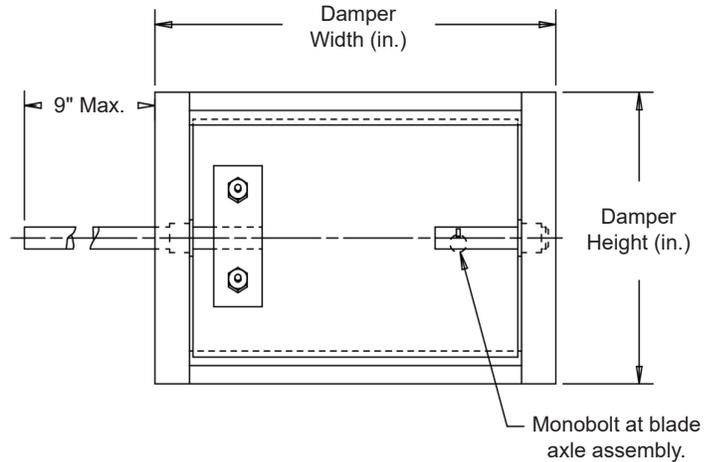

Item #	Qty	Width	Height	Width	Height	Union Made
		Opening Size		Damper Size		
<b>Arch. / Eng.:</b>						
<b>Contractor:</b>						
<b>Project:</b>						
<b>EDR:</b>		<b>ECN:</b>		<b>Job:</b>		
<b>Date:</b>		<b>DWN:</b>		<b>DWG:</b>		

