## STANDARD MATERIALS AND CONSTRUCTION

**FRAME:** .060" thick (nominal) extruded aluminum, 6063-T52/T6 alloy. **BLADE:** .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.

SCREEN: (When indicated.)

<sup>18</sup>/<sub>16</sub> mesh, .011" dia. aluminum wire, insect screen.

FINISH: Mill

## **OPTIONS**

Finish - Baked Enamel, Kynar, Anodize

Screens - 1/2" sq. mesh, 19 GA galvanized steel, .041",

-or- ½" flattened aluminum, .051",

-or- 1/4" sq. mesh, 18 GA galvanized steel, .047",

Plus others.


## **NOTES**


1. Unless otherwise specified, % deductions will be made to the opening size given.

2. Approximate shipping weight is 3.0 lbs./sq.ft.

## **LOUVER SIZES**

Min Panel	Max Single Panel		
6"W x 6"H	24"W x 24"H		

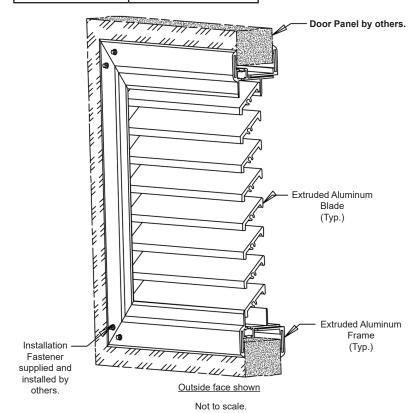

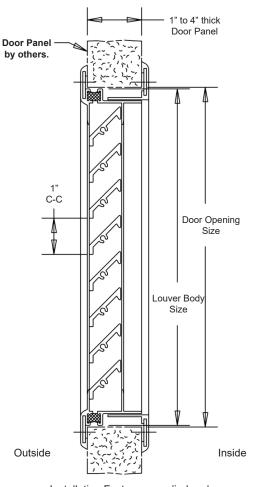

Page 1

Installation Fastener supplied and installed by others.

Not to scale.

Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location	,	ONAL 1
		Openir	ng Size	Louve	r Size	Mullion	Screens		,	<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:	Joh	:
Contractor:										
Project:						Date:		DWN:	DWG	:



airbalance.com