Penthouse Louver • 4" Blade Width • Stationary Drain Blades • Post Corner • Extruded Aluminum

ANGLES - All corners and intermediate to Interior Fastening Installation extend from roof into curb. Insulation Removable Extruded Flat Roof Blades 00 00 2" x 2" x 1/4" thk. 1" x 1" x 1/4" thk. Aluminum Angle Aluminum Angle 00 Removable Roof "H' Optional Sloped Roof Post Corner Detail <u>Available</u> Aluminum Corner Cover "A" O.D. (in.) Curb by Others Aluminum Curb Cap "C" I.D. Extruded (Typ.) (in.) "B" O.D. Blades "D" I.D. (in.) (in.) Continuous angle at the four corners and intermediate as required.

Specifications ————

MATERIAL: .081" thick (nominal) or .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy, with reinforcing rib bosses.

ROOF: .060" thick (nominal) sheet aluminum removable roof, reinforced with aluminum bracing where required to take a snow

load of 40 lbs./sq.ft., plus a required safety factor.

SCREENS: (When indicated)

Bird Screen - 1/2" square mesh, 19 GA. galvanized steel, on interior.

INSULATION: Underside of roof is lined with ½" thick insulation.

NOTES: Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.

Item #	O±1.	А	В	C	D	Н	Mullion	Туре	Location		
item#	Qty	Penthouse Dimensions					iviuilion	Screens			<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	


In the interest of product development, Cesco Products reserves the right to make changes without notice.



Page 1

Penthouse Louver • 4" Blade Width • Stationary Drain Blades • Post Corner • Extruded Aluminum

Page 2

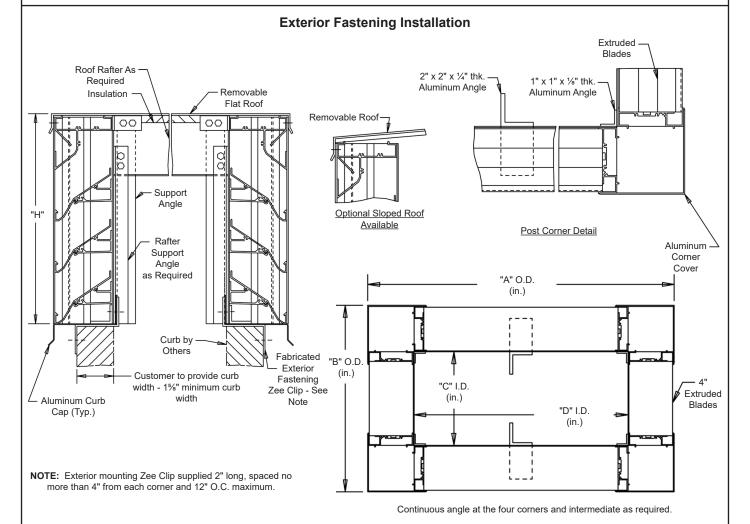

Specifications

MATERIAL: .081" thick (nominal) or .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy, with reinforcing rib bosses.

ROOF: .060" thick (nominal) sheet aluminum removable roof, reinforced with aluminum bracing where required to take a snow

load of 40 lbs./sq.ft., plus a required safety factor.

SCREENS: (When indicated)

Bird Screen - 1/2" square mesh, 19 GA. galvanized steel, on interior.

INSULATION: Underside of roof is lined with ½" thick insulation.

NOTES: Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.

ltem #	Qty	А	В	С	D	Н	Mullion	Туре	Location		OO J
		Penthouse Dimensions					IVIUIIION	Screens			<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

