Standard Access Doors ▲ 1½" or 2" Deep ▲ In-Swing ▲ With Louver ▲ Extruded Aluminum

'Y' **=**

'X

'X'

Page 1

Dual Acting

Handles

STANDARD MATERIALS AND CONSTRUCTION

FLANGED FRAME: .080" thick (nominal) 6063-T52/T6 extruded aluminum. **DOOR FRAME:** .080" thick (nominal) 6063-T52/T6 extruded aluminum.

DOOR PANELS: 20 GA. galvanized steel.

INSULATION: 2.25 lb. density polyurethane foam.

HANDLES: Dual-acting die cast zinc. **GASKET:** Continuous length extruded foam santoprene.

HINGE: Stainless steel continuous type.

FINISH: Mill.

Door panel material: bonderized steel, stainless steel, aluminum

Finishes - Baked Enamel, Baked Epoxy, or Prime Coat


- 1. Hinge always furnished on "B" height dimension.
- 2. (L) designates doors with louvers. Specify (L/H) left hand or (R/H) right hand hinge when viewing from the outside.
- 3. Minimum louver size is 12" x 12". Maximum louver size is full door panel size. For louver location, use "X" and "Y" dimensions.
- 4. Unless otherwise specified, door will be fabricated 1/4" under listed size. Dimensional tolerance is ± .075.
- 5. Door width cannot exceed two times its height.
- 6. Please refer to the installation instructions for mounting of handles and door assembly mounting.
- 7. In-swing doors are recommended for positive pressures. Out-swing doors are recommended for negative pressures.

DOOR SIZES

Min Size	Max Size				
12"W x 12"H	48"W x 96"H				

Model	'C' Depth
15	11/8"
20	23/8"

Door Panel View Minus Door Frame (Left hinge units shown.) Not to scale.

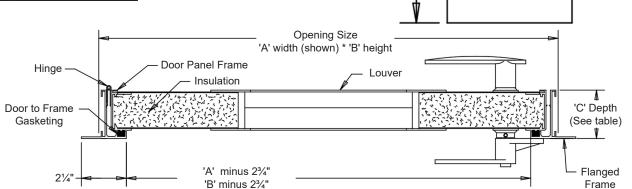

Item #	Qty	-15I	-20I	Left Hand	Right Hand	"A" Width	"B" Height	Model -15I (EA-150-F)	Model -20I (EA-200-F)	Х	Y	00
		Door Model		Door Hinge		Opening Size		Louver Size (Width, Height, O.D. of Flange)		Louver Location		Union Made
Arch. / I					EDR:		ECN:			Job:		
Contractor:												
Project:						Date:		DWN:			DWG:	

