

**STANDARD MATERIALS AND CONSTRUCTION**

**FRAME:** .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

**BLADE:** .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy. Available as .125" thick (nominal). Blades positioned at 45° angle, spaced approximately 4" on centers with architectural hidden mullions.

**SUPPORTS:** Incorporated rear angle 2" x 2" x 1/4" extruded aluminum blade support to withstand windload of 20 PSF, approximately 90 mph wind. Supports vary as required, per wind load. Spaced on 60" centers.

**FINISH:** Mill





**OPTIONS**


Variations - Mitered Corner, Post Corner, Hinged Access, and Cap Covers.

Finishes - Kynar, Baked Enamel, Clear and Color Anodize (Consult the factory for details.)

**NOTES**

1. Maximum size should not exceed 60 sq. ft. or 120"W x 72"H. Louver sections larger than the factory maximum size will require field assembly of smaller sections.
2. Approximate shipping weight is 4.5 lbs./sq.ft.

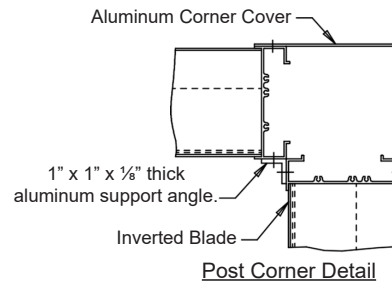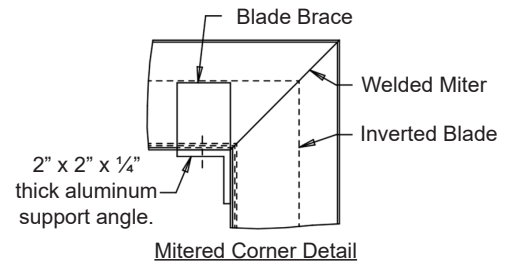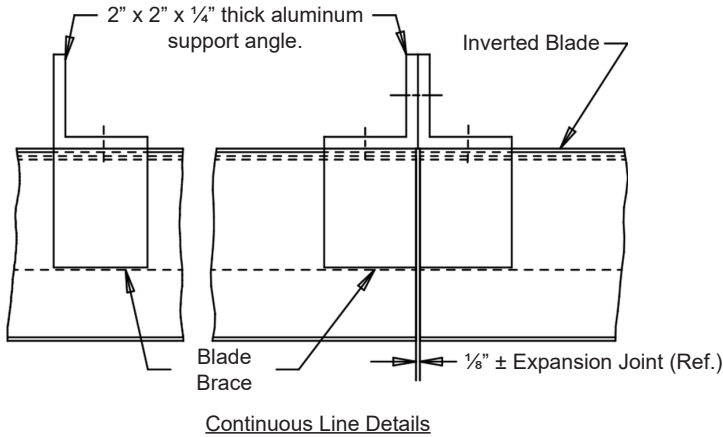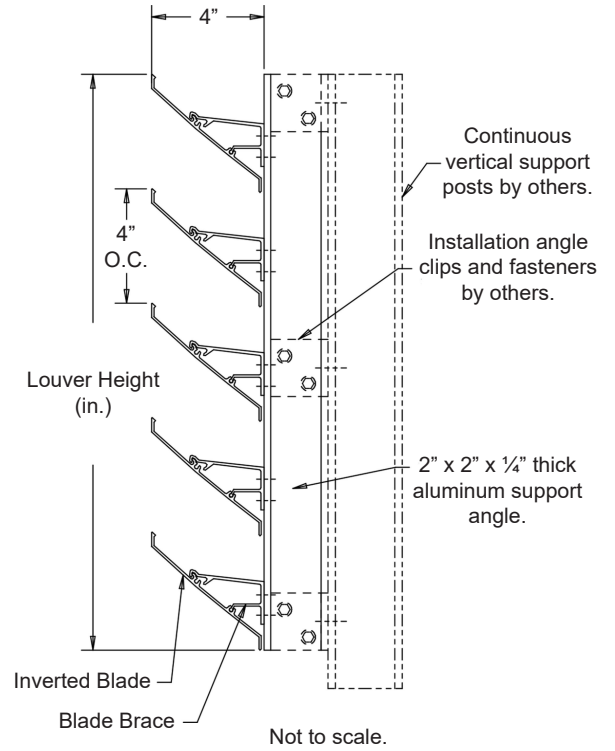

									
<b>Item #</b>	<b>Qty</b>	Height	Width	<b>Mullion</b>	Mitered	Post	<b>Corner Type</b>		<b>Union Made</b>
		<b>Screen Size</b>			<b>Corner Type</b>				
<b>Arch. / Eng. :</b>				<b>EDR:</b>	<b>ECN:</b>	<b>Job:</b>			
<b>Contractor:</b>									
<b>Project:</b>				<b>Date:</b>	<b>DWN:</b>	<b>DWG:</b>			