



**OPERATIONS RATINGS**

Maximum Differential Pressure: 4 in. w.g. (6 in. w.g. depending on actuator selection).  
 Maximum Velocity: 2000 fpm (3000 fpm depending on actuator selection).

**LEAKAGE RATINGS**

UL Class I  
 8 cfm per sq.ft. maximum @ 4 in. w.g.


**SOUND RATINGS**

No ratings available.

**PRESSURE DROP RATINGS**

The pressure drop data shown below is based on laboratory conditions. The test setup does not take into account elbows or other duct fittings that are part of every actual duct system. The configuration of the actual duct system immediately upstream and downstream of the damper often contributes more pressure loss than the damper itself.

This product was tested in accordance with AMCA Standard 500D.

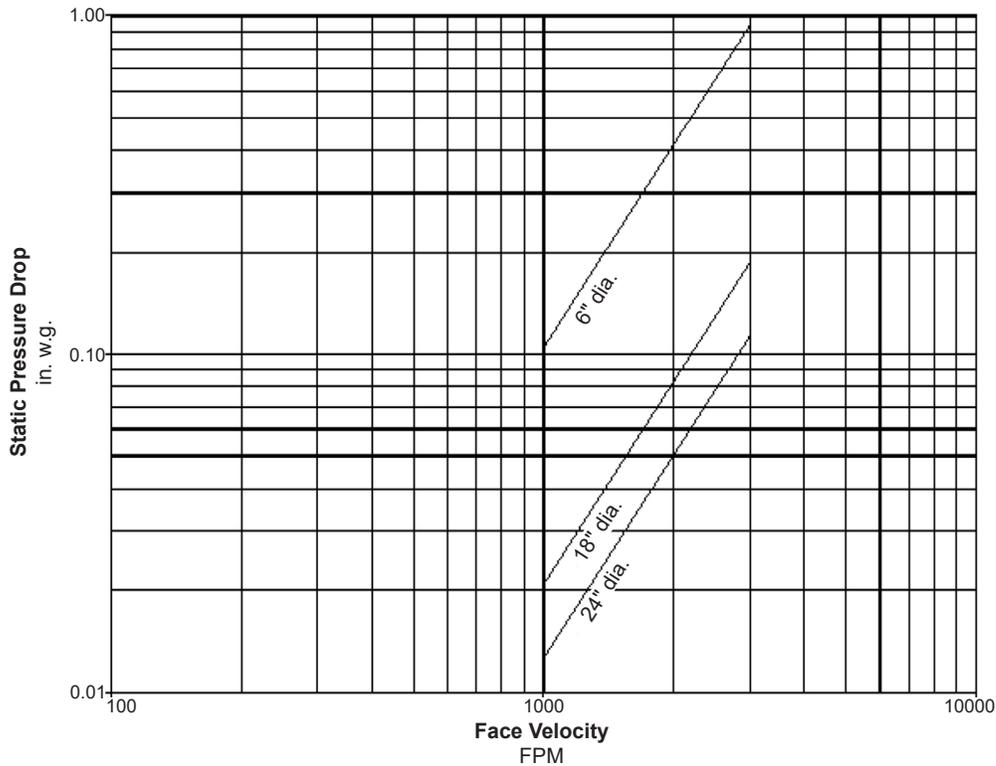

AMCA Figure 5.3