

**STANDARD MATERIALS AND CONSTRUCTION**

- FRAME:** .125" thick (nominal) extruded aluminum.
- BLADE:** .125" thick (nominal) extruded aluminum.
- SCREEN:** 18/16 Mesh, .011" dia. aluminum wire, insect screen.
- FINISH:** Clear anodized finish is standard.


**OPTIONS**

Finish - Baked Enamel, Kynar, Anodize


**NOTES**

1. Nominal deductions will be made from opening dimensions given unless otherwise stated.
2. Many stock sizes are available for immediate shipment. Brick vents are also available in practically any width or height.

Stock Sizes Available		Minimum Opening Size	Free Area (Sq. In.)
Model No.	Ordered Size		
<b>125</b>	12" x 4 <sup>3</sup> / <sub>4</sub> "	12 <sup>1</sup> / <sub>4</sub> " x 5 <sup>1</sup> / <sub>4</sub> "	17.28
<b>123</b>	12" x 2 <sup>3</sup> / <sub>8</sub> "	12 <sup>1</sup> / <sub>4</sub> " x 2 <sup>7</sup> / <sub>8</sub> "	6.34
<b>825</b>	8 <sup>1</sup> / <sub>8</sub> " x 2 <sup>3</sup> / <sub>8</sub> "	8 <sup>3</sup> / <sub>8</sub> " x 2 <sup>7</sup> / <sub>8</sub> "	4.18
<b>847</b>	8 <sup>1</sup> / <sub>8</sub> " x 4 <sup>3</sup> / <sub>4</sub> "	8 <sup>3</sup> / <sub>8</sub> " x 5 <sup>1</sup> / <sub>4</sub> "	11.52
<b>808</b>	8 <sup>1</sup> / <sub>8</sub> " x 7 <sup>3</sup> / <sub>4</sub> "	8 <sup>3</sup> / <sub>8</sub> " x 8 <sup>1</sup> / <sub>4</sub> "	19.58
<b>162</b>	16 <sup>1</sup> / <sub>2</sub> " x 2 <sup>3</sup> / <sub>8</sub> "	16 <sup>3</sup> / <sub>4</sub> " x 2 <sup>7</sup> / <sub>8</sub> "	8.64
<b>164</b>	16 <sup>1</sup> / <sub>2</sub> " x 4 <sup>3</sup> / <sub>4</sub> "	16 <sup>3</sup> / <sub>4</sub> " x 5 <sup>1</sup> / <sub>4</sub> "	28.22
<b>168</b>	16 <sup>1</sup> / <sub>2</sub> " x 7 <sup>3</sup> / <sub>4</sub> "	16 <sup>3</sup> / <sub>4</sub> " x 8 <sup>1</sup> / <sub>4</sub> "	40.32
<b>244</b>	24" x 4 <sup>3</sup> / <sub>4</sub> "	24 <sup>1</sup> / <sub>4</sub> " x 5 <sup>1</sup> / <sub>4</sub> "	39.02
<b>248</b>	24" x 7 <sup>3</sup> / <sub>4</sub> "	24 <sup>1</sup> / <sub>4</sub> " x 8 <sup>1</sup> / <sub>4</sub> "	58.75

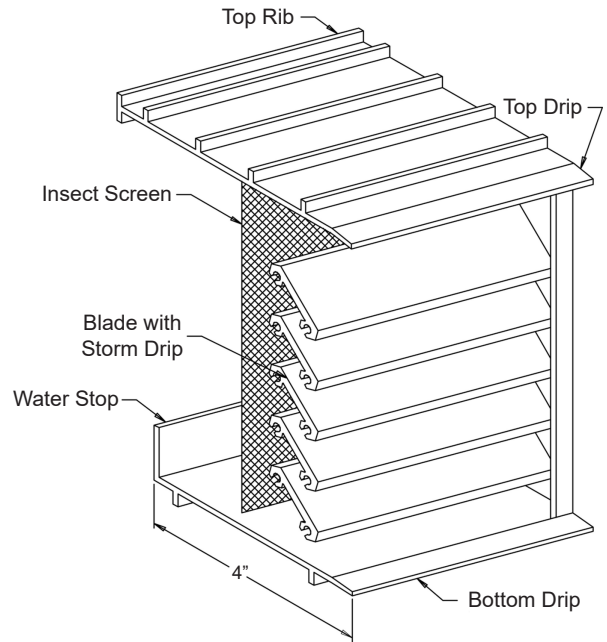


For custom size Brick Vents, contact customer service for details.



**Straight Ducts**

Fastened securely to vent 24 GA. galvanized steel standard. Specify wall thickness ("A" dimension)

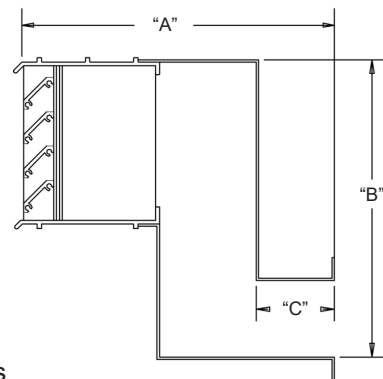

**"Z" Ducts**

Fastened securely to vent 24 GA. galvanized steel standard. Use when space to be vented is below grade. Provide dimensions "A", "B", and "C".

# Standard Brick Vents

**Brick Vent** ▲ 4" Deep ▲ 45° Straight Blades ▲ Stationary ▲ Extruded Aluminum

Item	Qty	Opening Size		Finish	Tagging	Net Each	Total
		Width ("A")	Height ("B")				