

**Equipment Screen Louver ▲ 4" Deep ▲ "Y" Shape Blades ▲ Vertical ▲ Sight Proof ▲ Extruded Aluminum**

**STANDARD MATERIALS AND CONSTRUCTION**

**FRAME:** .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

**BLADE:** .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

Blades spaced approximately 3" on center with architectural style hidden mullions.

**SUPPORTS:** Shall incorporate rear angle 2" x 2" x 1/4" extruded aluminum to withstand windload of 20 PSF, approximately 90 mph wind. Supports vary as required, per windload. Spaced approximately 60" on centers.

**FINISH:** Mill

**OPTIONS**

Variations - Mitered Corner, Post Corner, Hinged Access, and Cap Covers.



Finishes - Kynar, Baked Enamel, Clear and Color Anodize (Consult the factory for details.)


**NOTES**

1. Maximum panel size should not exceed 60 sq. ft. or 120"W x 72"H. Louver sections larger than the factory maximum size will require field assembly of smaller sections.
2. Approximate shipping weight is 4.5 lbs./sq.ft.

**SCREEN SIZES**

Min Panel	Max Single Panel
12"W x 12"H	120"W x 72"H (60 sq. ft.)

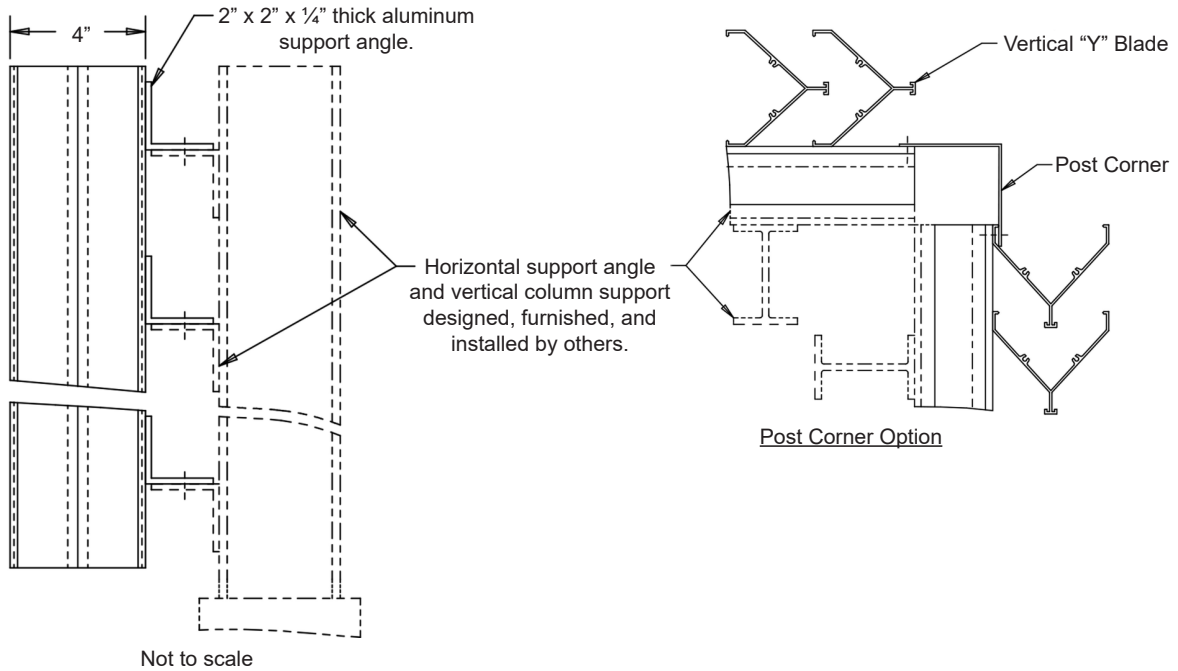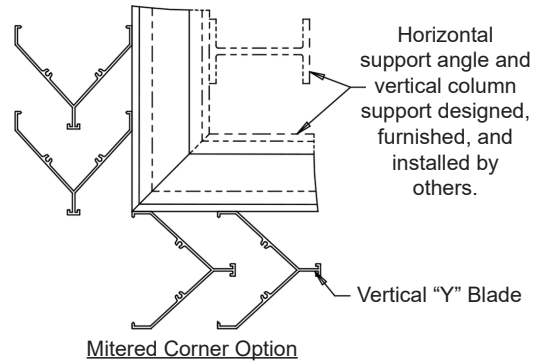

								
Item #	Qty	Height	Width			Mitered	Post	
		Screen Size		Mullion	Corner Type	Union Made		
Arch. / Eng. :		EDR:		ECN:	Job:			
Contractor:		Date:		DWN:	DWG:			
Project:								