

STANDARD MATERIALS AND CONSTRUCTION

FRAME: 16-GA. galvanized steel.

BLADE: Adjustable blade made from 16-GA. galvanized steel.
Stationary blade made from 18-GA. galvanized steel.
Blades approximately 3" on centers.

LOUVER FACE: Full head and sill with blades and jambs contained within.

LINKAGE: Brackets are 12-GA. Zinc plated machined steel. Pivots rotate in a Celcon bearing. A .312" dia. aluminum linkage rod is locked to the pivot by a ¼ - 20 set screw with an epoxy patch.

SEALS: Dual Durometer vinyl-grip seals at blade edge.
Neoprene at jambs.

SHAFTS: ½" dia. plated steel stub.

SCREEN: (Secured to the exterior)
½" flattened aluminum (.051"),
-or- ½" sq. mesh 19-GA. galvanized steel (.041"),
-or- 19/16 aluminum mesh insect screen (.011" dia.)

FINISH: Mill.

OPTIONS

Finishes - Enamels, Epoxies, etc.

Other screens also available.



Actuators - Electric, Pneumatic, Manual, etc.

NOTES


1. Nominal deductions will be made to the opening sizes given.
2. Approximate shipping weight is 9.0 lbs./sq.ft.

LOUVER SIZES



Min Panel	Max Single Panel
12"W x 14"H	48"W x 96"H

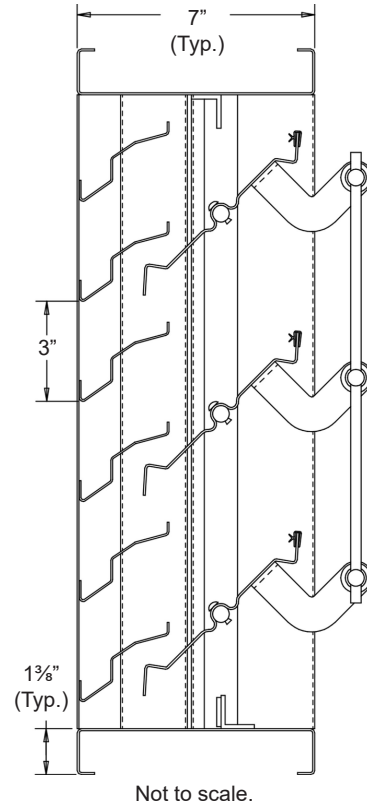

Head

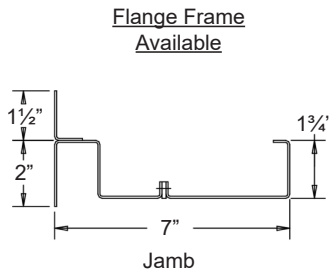

Jamb

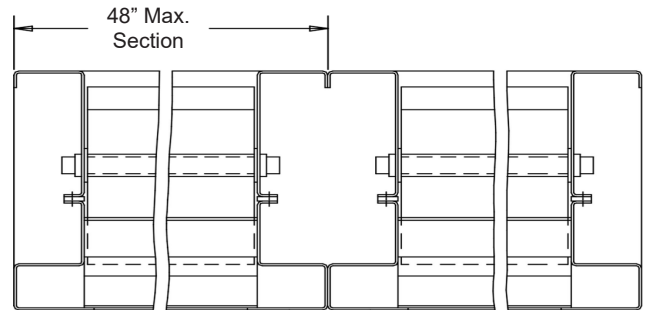

Sill

Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location	Union Made
		Opening Size		Louver Size			Screens		
Arch. / Eng. :						EDR:		ECN:	Job:
Contractor:									
Project:						Date:		DWN:	DWG:

