


Cabinet Unit Heater
Option
22
Factory Installed
MOTOR STARTER

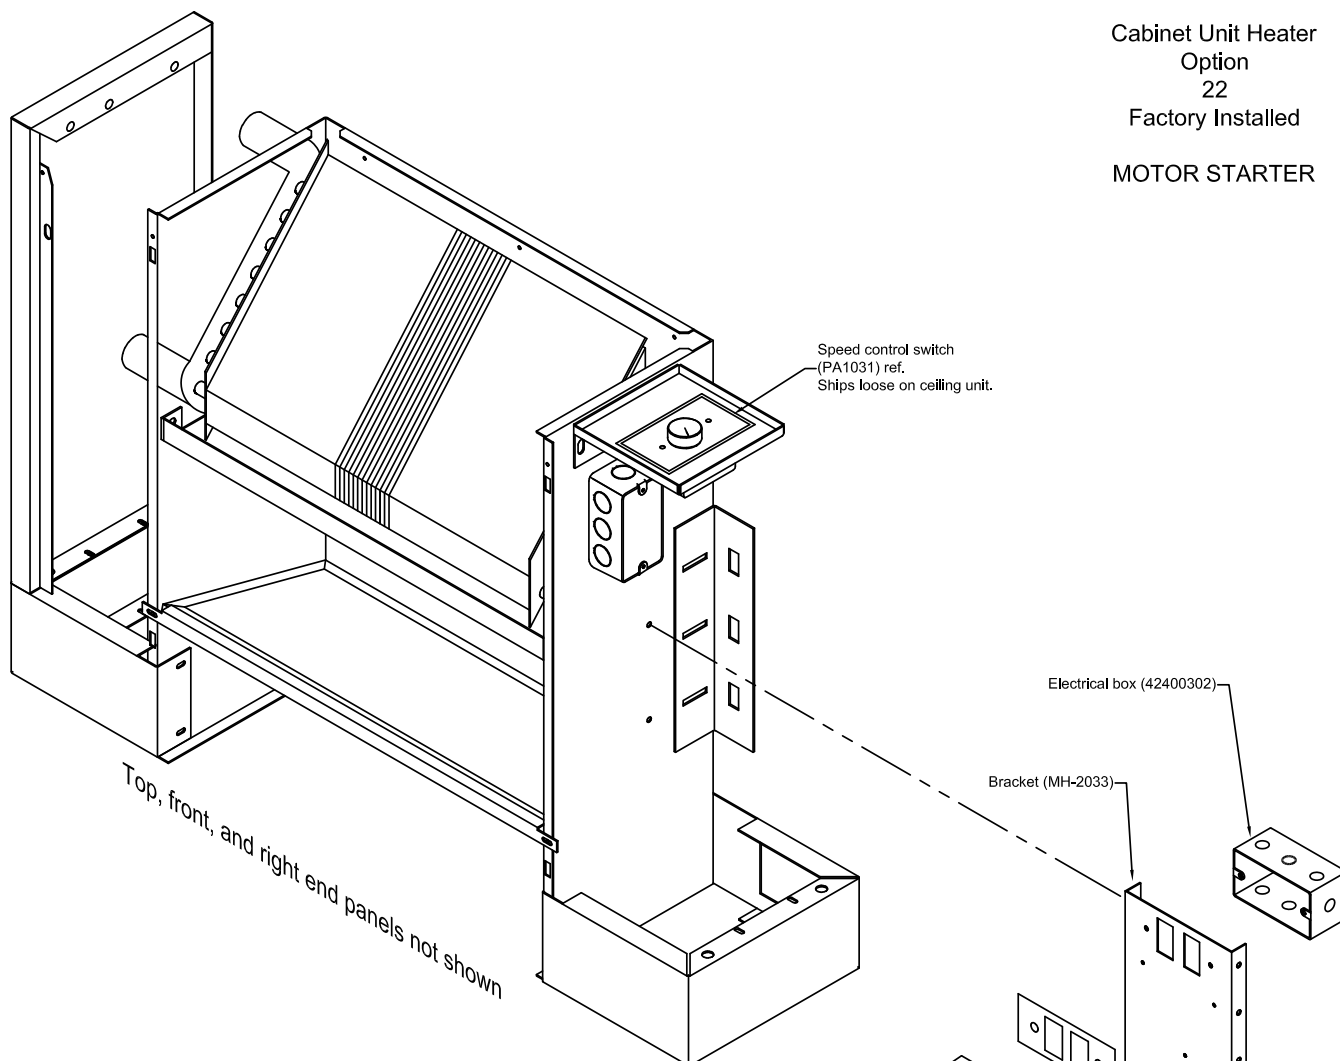

The motor starter consists of a toggle operated switch with a thermal overload and an off position. When the thermal overload is tripped, the switch must be turned to the off position and then to the on position to restart the unit.

This option is wired in series with the speed control (standard on all units) and blower motor(s). Please see wiring diagram, below.

Not available with ECM motors.

Wired and installed on unit(s)
at factory.

