

**Steel Control Damper • 4" Deep • Single Thickness Blades • Parallel or Opposed • Low Leakage**

Standard Materials and Construction

**FRAME:** 16-GA galvanized steel, hat-shaped channel, 4" deep.

**BLADE:** 16-GA galvanized steel, on 6" centers.

**LINKAGE:** Pivots are 1/2" dia. plated steel. A 1/4-20 set screw with locking patch locks the pivots to a .31" dia. aluminum rod. Pivots rotate in a celcon bearing. Blade brackets are 12-GA plated steel. Blade linkages are individually factory adjusted for maximum shut-off.

**BEARINGS:** Sintered bronze, oil impregnated.

**AXLES:** Plated steel, 1/2" dia.

**DRIVESHAFT:** 1/2" dia. plated steel, extendable 6".

**SEALS:** Vinyl grip on blades, stainless steel on jams.

**FINISH:** Mill.

Options

1 & 1/4" Flange Frame

Neoprene Blade Seals Only

13 GA Galvanized Steel Frame

Additional Drive Shafts

S.S. Drive Shafts Factory Joined Sections

Face & Bypass Dampers

In-jamb Linkage



Finishes - Baked Enamel, Kynar, or Anodize

Notes

1. 1/4" nominal deduction will be made to the opening size given.
2. Dampers less than 11" high will be a single blade.
3. Dampers between the height of 11" and 14 3/4" will have two blades, opposed action only. Dampers less than 8 3/4" in height will be provided with a 5/8" x 2" x 5/8" extruded aluminum frame.
4. Damper is rated for systems up to 2,000 fpm or up to 4 in. w.g. If being used for applications beyond this, please advise when ordering.
5. Shipping weight approximately 6.5 lbs. per sq.ft.

Damper Sizes

Min Panel	Max Single Panel
6"W x 8 3/4"H	48"W x 72"H

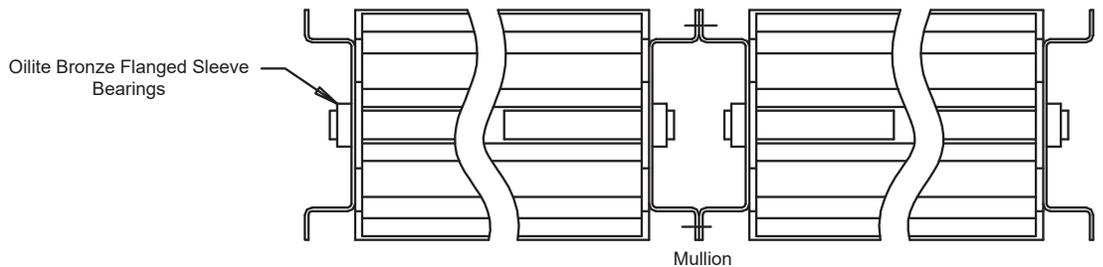
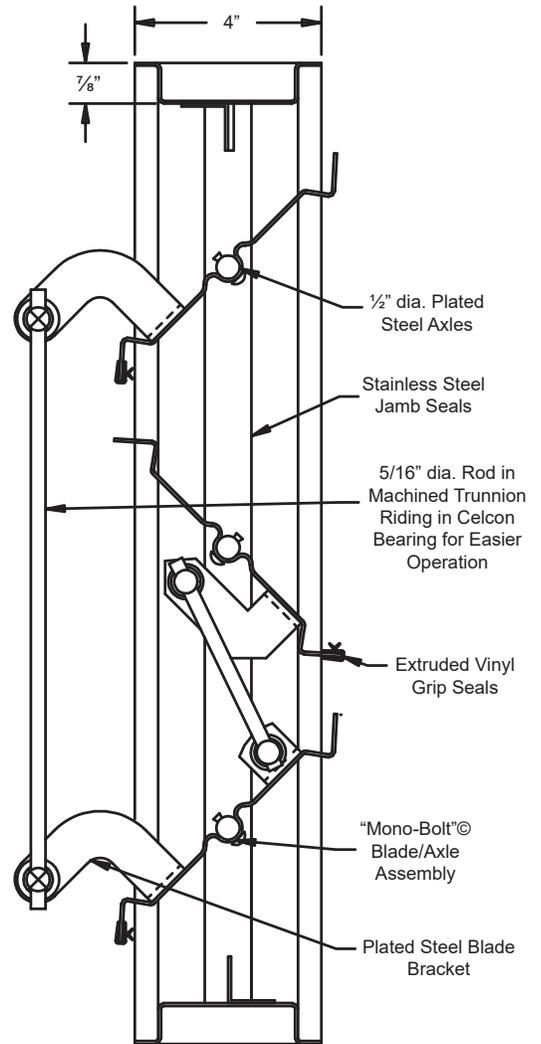


Item #	Qty	Width	Height	Parallel Blades	Opposed Blades	Seals	Actuator Model	Interior	Exterior	N.C.	N.O.	Union Made
								Act. Location		Function		
Arch. / Eng.:						EDR:		ECN:		Job:		
Contractor:												
Project:						Date:		DWN:		DWG:		

**Steel Control Damper • 4" Deep • Single Thickness Blades • Parallel or Opposed • Low Leakage**

Pressure Drop

Pressure Drop Ratings are based on AMCA Standard 500 using test set-up Fig. 5.3 for damper installed with duct upstream and downstream. Static pressures are corrected to .075 lb/cu.ft. air density.

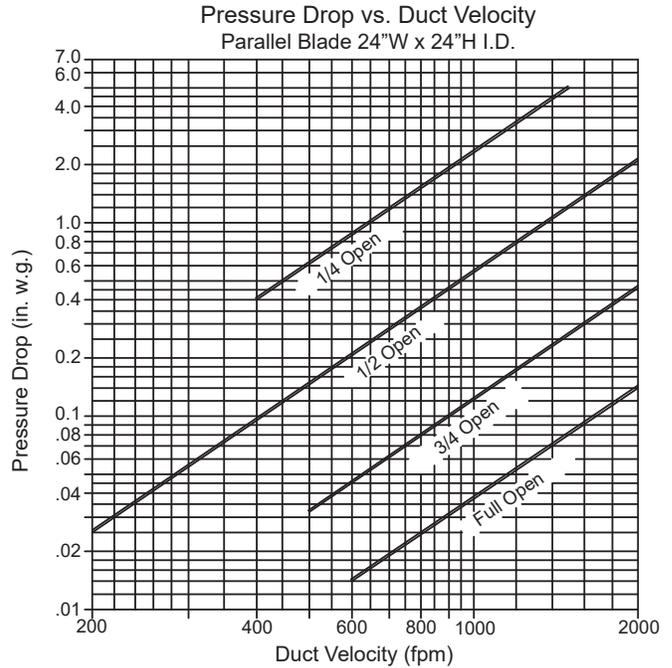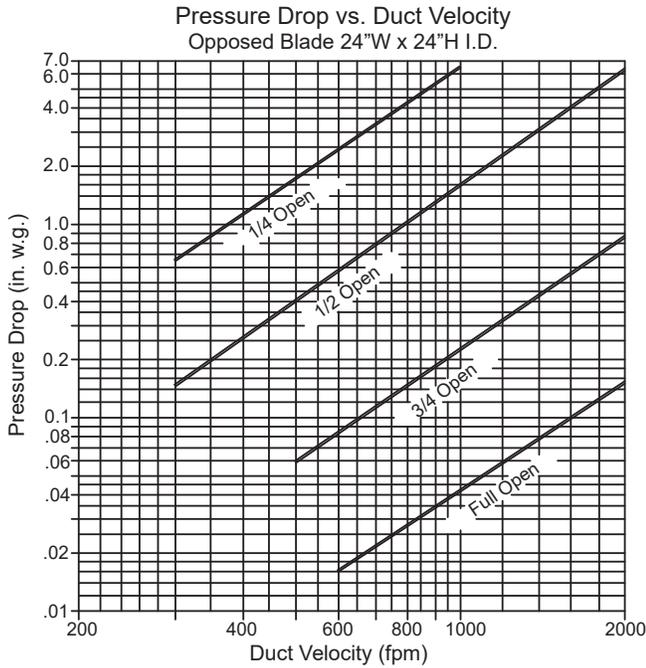

Air Leakage

Leakage Ratings are based on AMCA Standard 500 using test set-up Fig. 5.4. Data is based on a closing torque of 5 in-lbs/sq.ft. with a minimum of 25 in-lbs of closing torque applied to damper operating shaft, regardless of damper size.

Total CFM Air Leakage at 1 in. w.g.  
Differential Through Closed Damper.

		Width			
		12"	24"	36"	48"
Height	12"	3	6	9	12
	18"	5	9	14	18
	24"	6	12	18	24
	30"	8	15	23	30
	36"	9	18	27	36
	42"	11	21	32	42
	48"	12	24	36	48
	54"	14	27	41	54
	60"	15	30	45	60
	66"	17	33	50	66
72"	18	36	54	72	

Air leakage quantities shown above are corrected to standard air density. Air leakage is based on operation between 50°F -104°F.

Air Leakage Correction Factors

Blade Length Limit	Pressure (in. w.g.)	Conversion Factor
48" or less	2	1.27
	3	1.60
	4	1.90

Use of correction factors will give leakage values at greater than 1" pressures.