

MODEL AC482-12-6**Acoustical Louver • 12" Deep • 6" Blade Spacing • Formed Aluminum**

Page 1

Standard Materials and Construction**FRAME:** 14-GA aluminum.**BLADE:** 16-GA aluminum Airfoil exterior with 22-GA perforated aluminum interior surface.**INSULATION:** Eco-Sound insulation.**SCREEN:** ½" sq. mesh, aluminum (.051")**FINISH:** Mill.Options



Finish - Baked Enamel, Kynar, Anodize

Notes

1. Nominal deductions will be made to the opening size given.

Louver Sizes

Min Panel	Max Single Panel
12"W x 24"H	60"W x 96"H

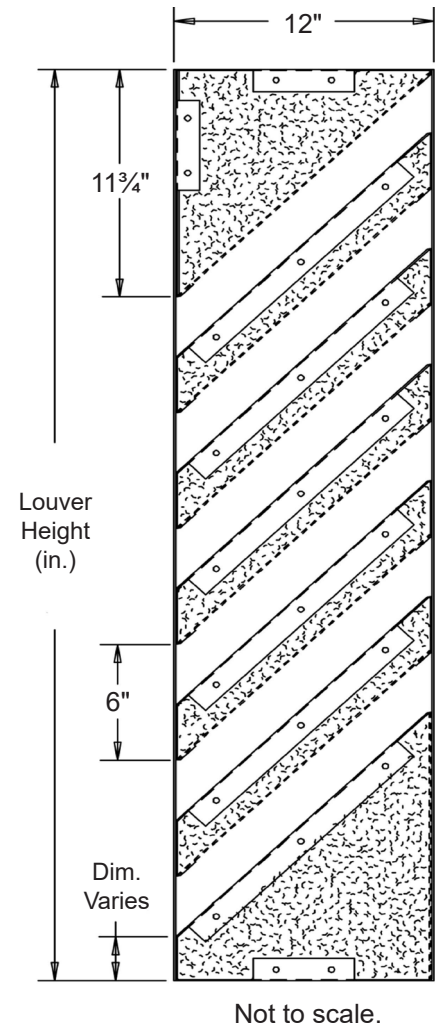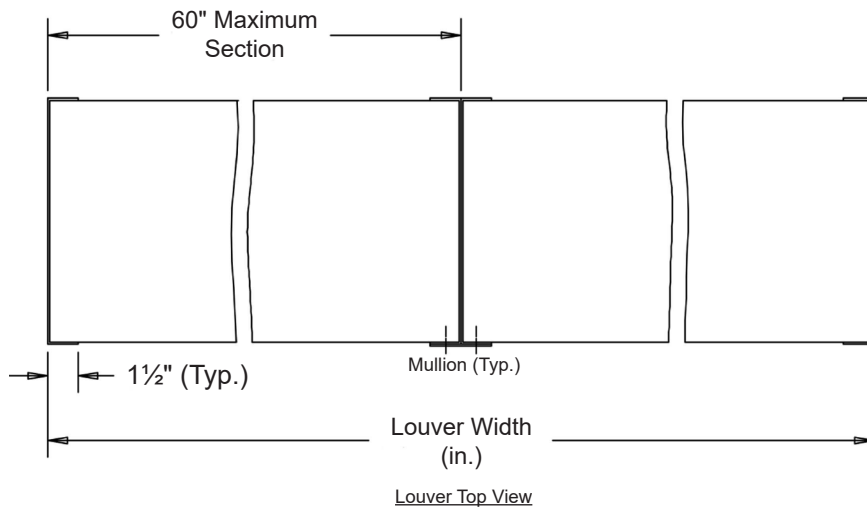

Not to scale.


											
Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location			Union Made
		Opening Size		Louver Size			Screens				
Arch. / Eng.:						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

MODEL AC482-12-6**Acoustical Louver • 12" Deep • 6" Blade Spacing • Formed Aluminum**


Page 2

Performance Data

Ratings do not include effects of a screen.

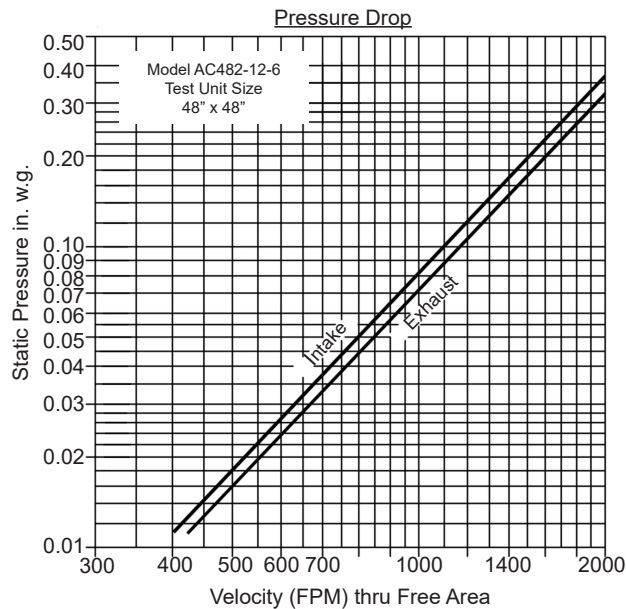

Intake air converted to standard air density.
Tested to AMCA Standard 500-L, Figure 5.5.

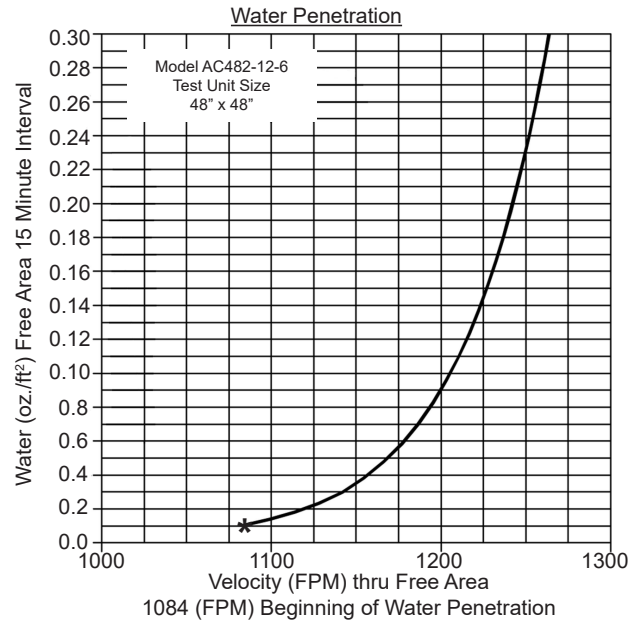Transmission Loss

Octave Band	1	2	3	4	5	6	7	8
Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Sound Transmission Loss (db)	8	7	5	10	19	26	16	14
Free Field Noise Reduction	14	13	11	16	25	32	22	20

Attenuation

Octave Band Center Frequency (Hz)

Distance from Louver (ft)	Octave Band Center Frequency (Hz)							
	1 / 63	2 / 125	3 / 250	4 / 500	5 / 1000	6 / 2000	7 / 4000	8 / 8000
0'	14	13	11	16	25	32	22	20
10'	26	25	23	28	37	44	34	32
50'	40	39	37	42	51	58	48	46
100'	46	45	43	48	57	64	54	52
200'	52	51	49	54	63	70	60	58
500'	60	59	57	62	71	78	68	66
1000'	66	65	63	68	77	84	74	72

Attenuation chart is a combination of the Model AC482-12-6 sound transmission loss and the reduction of sound energy as a function of distance.

Free Area (sq. ft.)

		Width (in.)								
		12"	18"	24"	30"	36"	42"	48"	54"	60"
Height (in.)	24"	.27	.44	.62	.80	.97	1.15	1.33	1.51	1.68
	36"	.53	.89	1.24	1.59	1.95	2.30	2.66	3.01	3.36
	48"	.80	1.33	1.86	2.39	2.92	3.45	3.98	4.52	5.05
	60"	1.06	1.77	2.48	3.19	3.90	4.60	5.31	6.02	6.73
	72"	1.33	2.21	3.10	3.98	4.87	5.76	6.64	7.53	8.41
	84"	1.59	2.66	3.72	4.78	5.84	6.91	7.97	9.03	10.09
	96"	1.86	3.10	4.34	5.58	6.82	8.06	9.30	10.54	11.78