

MODEL ASA102 & ASA103

Duct Access Door • 1" Deep • Flange Frame • Hinged (102) or Cammed (103)

Page 1

Standard Materials and Construction

FRAME: 22 GA. galvanized steel.
DOOR PANEL: 24 GA. galvanized steel.
INSULATION: 1" fiberglass.
FINISH: Mill.

Options




Hinged or Cammed
 Viewports
 High Pressure

Notes

1. "A" width and "B" height are opening dimensions.
2. Duct opening should be $\frac{1}{8}$ " greater than door size.
3. Standard pressure rating is 4.5 in. w.g. High pressure rating is 10 in. w.g.
4. On doors of non-standard size, the height is always the larger dimension.

Door Sizes

Panels	Standard Sizes	Hinged ASA102 Cams	Hinged High Pressure ASA102-H Cams	Cammed ASA103 Cams	Cammed High Pressure ASA103-H Cams
ASA	6"W x 6"H	1	3	2	4
	8"W x 8"H	1	3	2	4
	10"W x 10"H	1	3	2	4
	12"W x 12"H	1	3	2	4
	14"W x 14"H	1	3	2	4
	16"W x 16"H	2	6	4	8
	18"W x 18"H	2	6	4	8
	20"W x 20"H	2	6	4	8
	24"W x 24"H	2	6	4	8

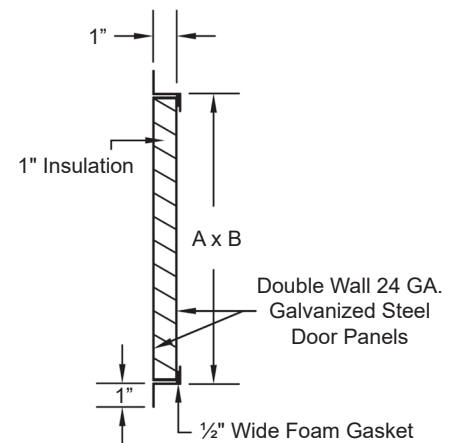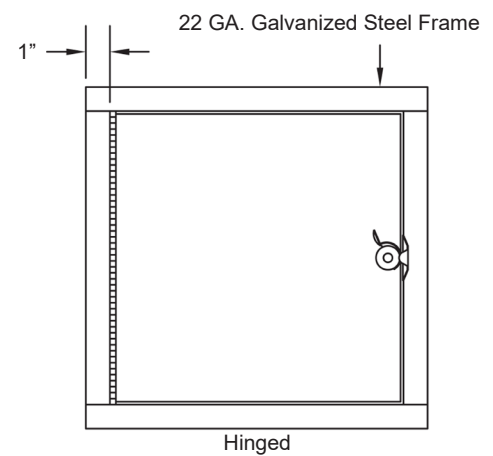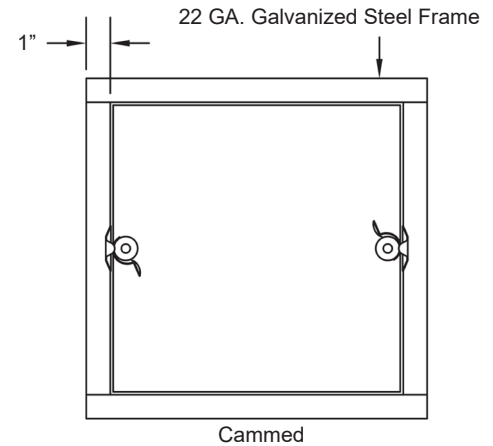

Item #	Qty	Door Type	"A" Height	"B" Width	Viewport	High Pressure	 Union Made
			Opening Size				
Arch. / Eng.:			EDR:		ECN:		Job:
Contractor:							
Project:			Date:		DWN:		DWG: