

# MODEL ASA-H

Duct Access Door • 1" Deep • High Pressure Duct Access • Hinged (100) or Cammed (101)

### Standard Materials and Construction

- FRAME:** 22 GA. galvanized steel.
- DOOR PANEL:** 24 GA. galvanized steel.
- INSULATION:** 1" fiberglass.
- PRE-FORMED TABS:** 22 GA. galvanized steel.
- FINISH:** Mill.

### Options




- 0.032" Thick Aluminum with Plated Steel Cams and Strikers
- 24 GA. Stainless Steel with Stainless Steel Cams and Strikers


### Notes

1. "A" width and "B" height are opening dimensions.
2. Standard construction made for static pressures up to 10 in. w.g.
3. On doors of non-standard size, the height is always the larger dimension.

### Door Sizes

Panels	Standard Sizes	ASA100-H Cams	ASA101-H Cams
ASA	6"W x 6"H	3	4
	8"W x 8"H	3	4
	10"W x 10"H	3	4
	12"W x 12"H	3	4
	14"W x 14"H	3	4
	16"W x 16"H	6	8
	18"W x 18"H	6	8
	20"W x 20"H	6	8
	24"W x 24"H	6	8

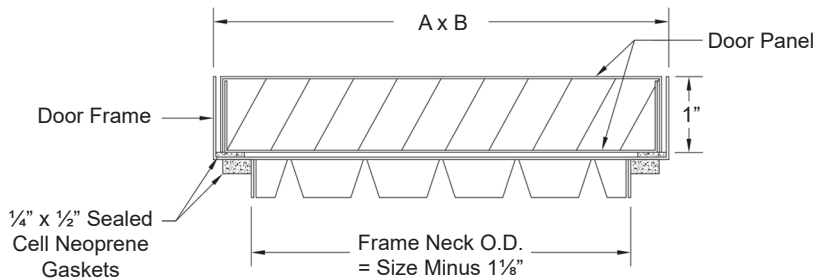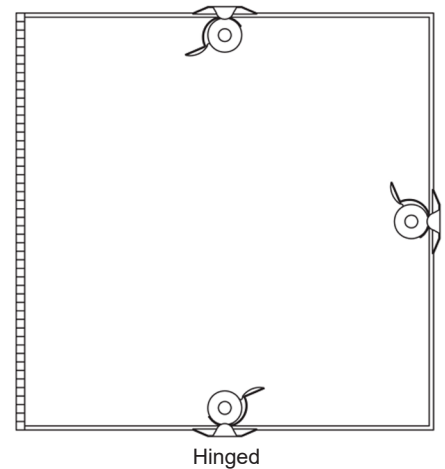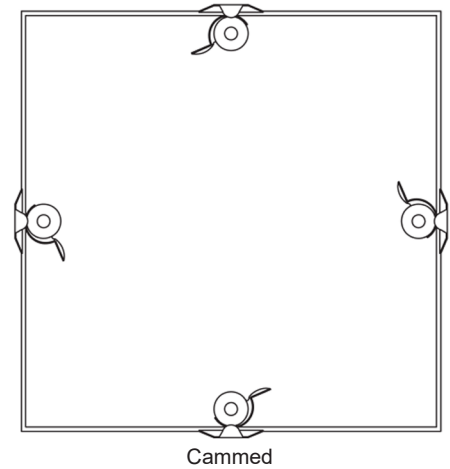

Item #	Qty	Door Type	"A"	"B"	Galvanized	Stainless	Aluminum	
			Width	Height				
Arch. / Eng.:					EDR:		ECN:	Job:
Contractor:								
Project:					Date:		DWN:	DWG: