

Standard Brick Vents

Brick Vent • 4" Deep • 45° Straight Blades • Stationary • Extruded Aluminum

Standard Materials and Construction

- FRAME:** .125" thick (nominal) extruded aluminum.
- BLADE:** .125" thick (nominal) extruded aluminum.
- SCREEN:** 18¹/₁₆ Mesh, .011" dia. aluminum wire, insect screen.
- FINISH:** Clear anodized finish is standard.


Options

Finish - Baked Enamel, Kynar, Anodize


Notes

1. 1/2" nominal deduction will be made to the opening size given unless otherwise stated.
2. Many stock sizes are available for immediate shipment. Brick vents are also available in practically any width or height.

Ordered Size	Minimum Opening Size	Free Area (Sq. In.)
12" x 4 ³ / ₄ "	12 ¹ / ₄ " x 5 ¹ / ₄ "	17.28
12" x 2 ³ / ₈ "	12 ¹ / ₄ " x 2 ⁷ / ₈ "	6.34
8 ¹ / ₈ " x 2 ³ / ₈ "	8 ³ / ₈ " x 2 ⁷ / ₈ "	4.18
8 ¹ / ₈ " x 4 ³ / ₄ "	8 ³ / ₈ " x 5 ¹ / ₄ "	11.52
8 ¹ / ₈ " x 7 ³ / ₄ "	8 ³ / ₈ " x 8 ¹ / ₄ "	19.58
16 ¹ / ₂ " x 2 ³ / ₈ "	16 ³ / ₄ " x 2 ⁷ / ₈ "	8.64
16 ¹ / ₂ " x 4 ³ / ₄ "	16 ³ / ₄ " x 5 ¹ / ₄ "	28.22
16 ¹ / ₂ " x 7 ³ / ₄ "	16 ³ / ₄ " x 8 ¹ / ₄ "	40.32
24" x 4 ³ / ₄ "	24 ¹ / ₄ " x 5 ¹ / ₄ "	39.02
24" x 7 ³ / ₄ "	24 ¹ / ₄ " x 8 ¹ / ₄ "	58.75

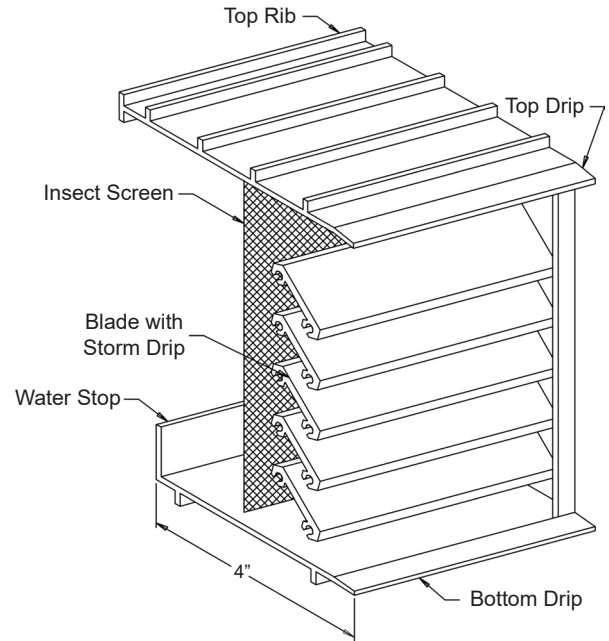


For custom size Brick Vents, contact customer service for details.



Straight Ducts

Fastened securely to vent 24 GA. galvanized steel standard. Specify wall thickness ("A" dimension)

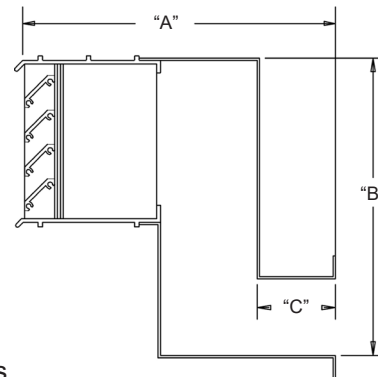

"Z" Ducts

Fastened securely to vent 24 GA. galvanized steel standard. Use when space to be vented is below grade. Provide dimensions "A", "B", and "C".

