

# MODEL EA-11-F

Extruded Aluminum Louver • 1" to 4" Deep • 45° Straight Blades • Flanged Frame • Door Louver

### Standard Materials and Construction

- FRAME:** .060" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.
- BLADE:** .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.
- SCREEN:** (When indicated.)  
1<sup>5</sup>/<sub>16</sub> mesh, .011" dia. aluminum wire, insect screen.
- FINISH:** Mill

### Options



- Finish - Baked Enamel, Kynar, Anodize
- Screens - 1/2" sq. mesh, 19 GA galvanized steel, .041",  
-or- 1/2" flattened aluminum, .051",  
-or- 1/4" sq. mesh, 18 GA galvanized steel, .047",  
Plus others.

### Notes

1. Unless otherwise specified, 1/8" deductions will be made to the opening size given.
2. Approximate shipping weight is 3.0 lbs./sq.ft.

### Louver Sizes

Min Panel	Max Single Panel
6"W x 6"H	24"W x 24"H

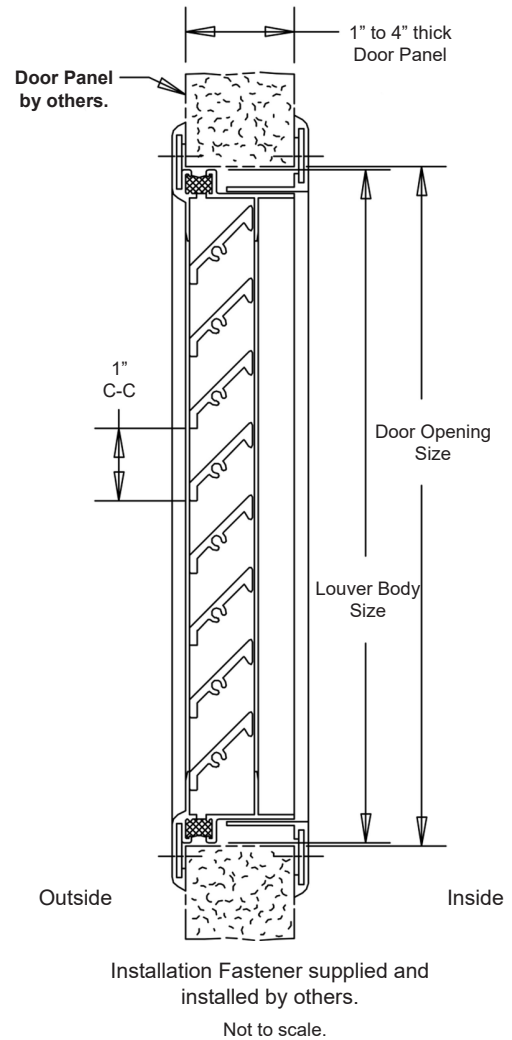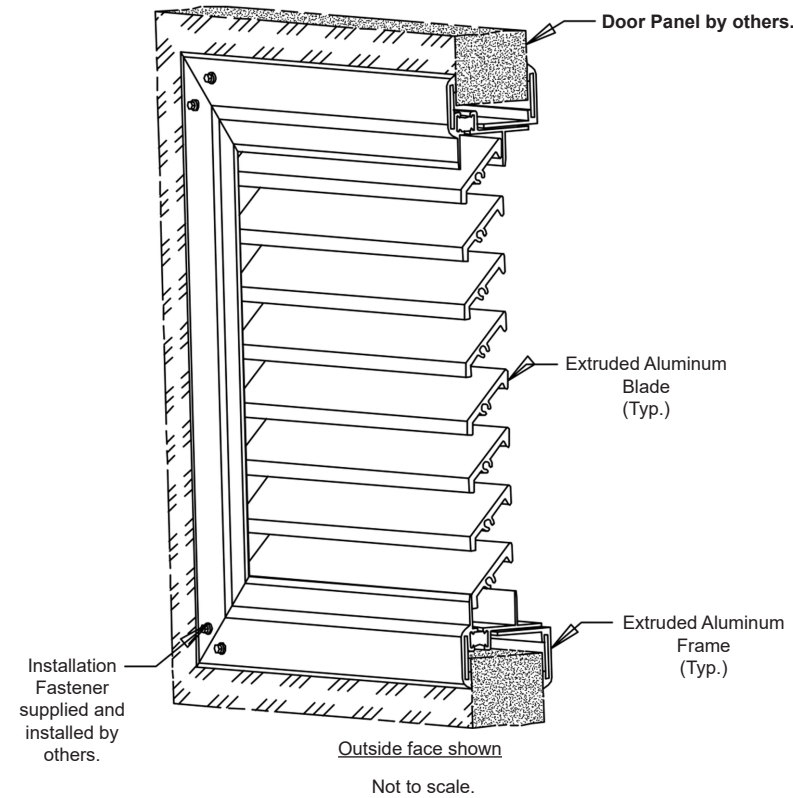

Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location	Union Made
		Opening Size		Louver Size			Screens		
Arch. / Eng.:						EDR:	ECN:	Job:	
Contractor:									
Project:						Date:	DWN:	DWG:	

