

SUBMITTAL DATA: TOWEL WARMER

BMSD-TW-2

STANDARD FEATURES

- Electrically Laser Welded (invisible weld seams)
- KTL Priming Coat, Powder Coating
- Standard Operating Pressure: 145 PSI
- Maximum Operating Temperature 200°F
- Connections: 1/2" (inner thread)
- 10 Year Warranty

SPECIFICATIONS

GK STRAIGHT

Part Number	Dimensions (LxH)*		Water Content (gal)	Weight (lbs)	BTU @180
	in	mm			
511110050007270	20 x 28	500 x 727	0.75	11	1,368
511110050009520	20 x 38	500 x 952	1.02	16	1,713
511110050013120	20 x 52	500 x 1312	1.39	22	2,511
511110060009520	24 x 38	600 x 952	1.15	18	1,982
511110060013120	24 x 52	600 x 1312	1.55	25	2,915

GKR CURVED

Part Number	Dimensions (LxH)*		Water Content (gal)	Weight (lbs)	BTU @180
	in	mm			
511112050009520	20 x 38	500 x 952	1.02	16	1,713
511112050013120	20 x 52	500 x 1312	1.39	22	2,511
511112060009520	24 x 38	600 x 952	1.15	18	1,982
511112060013120	24 x 52	600 x 1312	1.55	25	2,915

*Dimensions are approximate, see tables below for actual dimensions.



Beacon Morris®

260 North Elm Street • Westfield, MA 01085

Tel: (413) 562-5423

7555 Tranmere Drive • Mississauga, Ontario, L5S 1LR

Tel: (905) 670-5888

www.beacon-morris.com

PROJECT: _____ DATE: _____

LOCATION: _____

CUSTOMER: _____

ENGINEER: _____



SUBMITTED BY: _____

FOR: Reference Approval Construction

UNIT DESIGNATION: _____

SCHEDULE NUMBER: _____

DIMENSIONAL DRAWING
GK/GKR

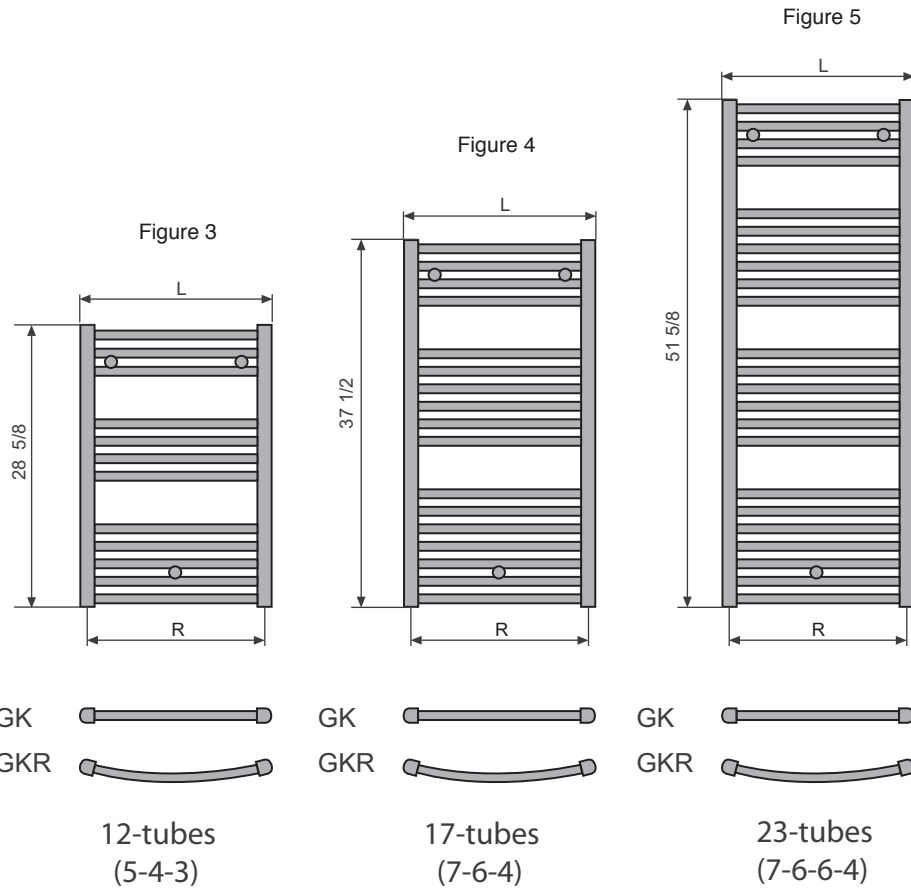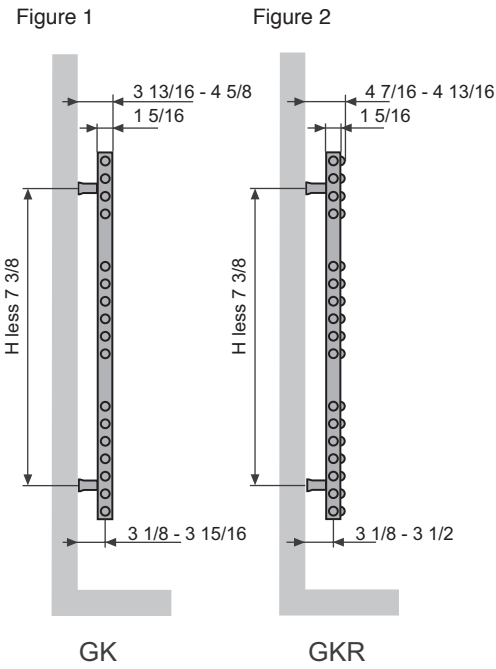

12-tubes
(5-4-3)

17-tubes
(7-6-4)

23-tubes
(7-6-6-4)

GK Straight

Reference	Height	L	R	Number of Tubes
Fig. 1 & 3	28 5/8	19 11/16	18 5/16	12
Fig. 1 & 4	37 1/2	19 11/16	18 5/16	17
Fig. 1 & 5	51 5/8	19 11/16	18 5/16	23
Fig. 1 & 4	37 1/2	23 5/8	22 1/4	17
Fig. 1 & 5	51 5/8	23 5/8	22 1/4	23

GKR Curved

Reference	Height	L	R	Number of Tubes
Fig. 2 & 4	37 1/2	19 1/2	18 5/32	17
Fig. 2 & 5	51 5/8	19 1/2	18 5/32	23
Fig. 2 & 4	37 1/2	23 9/16	22 1/16	17
Fig. 2 & 5	51 5/8	23 9/16	22 1/16	23