

Tab-Lock Retaining Angles

Fire Damper Models: 15S, 15D, 15MD, 15MA, 30S, 30D, 30MD, 30MA

Fire/Smoke Damper Models: CG, CH, CA, CT

APPLICATION

Tab-Lock Retaining Angles may be used to mount fire dampers or fire/smoke dampers both vertically and horizontally. UL approved for dampers with 1½ and 3 hour fire rating, they offer the flexibility of attachment to the sleeve into the rated barrier. The corner tabs can be bent 90° in either direction before or after attachment to the sleeve, depending on job site preference.

Tab-Lock Retaining Angles are pre-punched for easy attachment to the sleeve. Refer to the appropriate Installation Instruction for details.

NOTES

Material: 16-GA Galvanized Steel


Dimensions: 1½" x ¾"

Orientation: Vertical or Horizontal

Angles are pre-punched and shipped loose for field attachment to the sleeve. Refer to the appropriate Installation Instructions for details.

This combination fire/smoke and fire damper meets the construction and performance requirements of:

- Underwriters Laboratories Inc.
- ICC's International Building Code
- SMACNA
- National Fire Protection Association Standard 90A

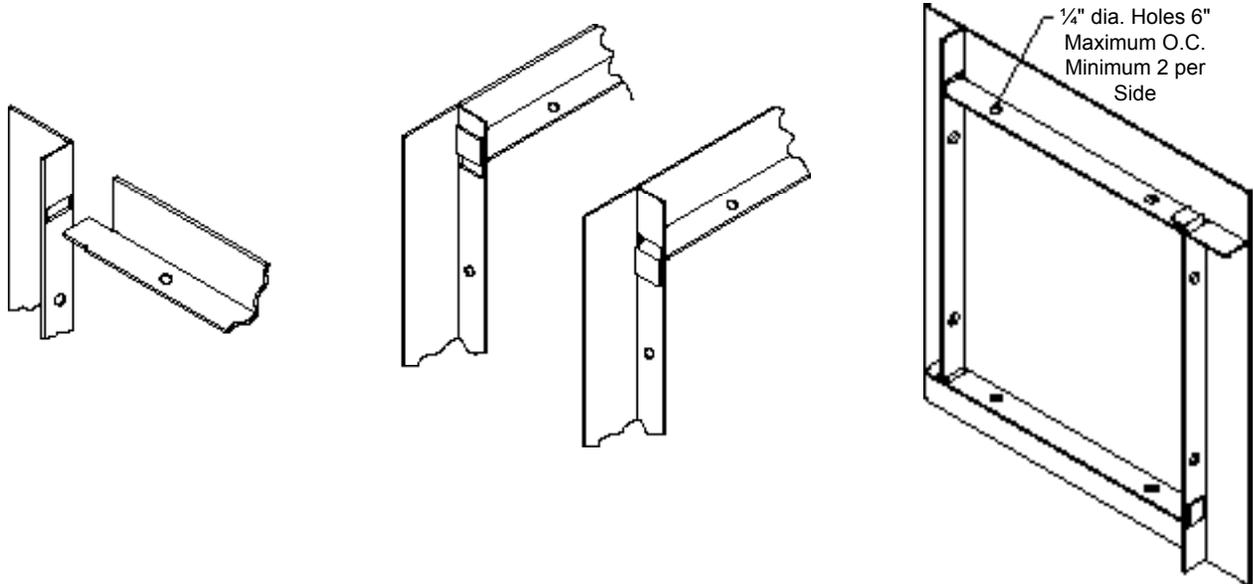

Tab-Lock Retaining Angles

Fire Damper Models: 15S, 15D, 15MD, 15MA, 30S, 30D, 30MD, 30MA

Fire/Smoke Damper Models: CG, CH, CA, CT

This page intentionally left blank.

