Extruded Aluminum Louver • 1" to 4" Deep • 45° Straight Blades • Flanged Frame • Door Louver

Standard Construction and Materials

FRAME: .060" thick (nominal) extruded aluminum, 6063-T52/T6 alloy. **BLADE:** .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.

SCREEN: (When indicated.)

¹⁸/₁₆ mesh, .011" dia. aluminum wire, insect screen.

FINISH: Mill

Options

Finish - Baked Enamel, Kynar, Anodize

Screens - 1/2" sq. mesh, 19 GA galvanized steel, .041",

-or- ½" flattened aluminum, .051",


-or- ¼" sq. mesh, 18 GA galvanized steel, .047", Plus others.


Notes

- 1. Unless otherwise specified, $\frac{1}{6}$ " deductions will be made to the opening size given.
- 2. Approximate shipping weight is 3.0 lbs./sq.ft.

Louver Sizes

Min Panel	Max Single Panel
6"W x 6"H	24"W x 24"H

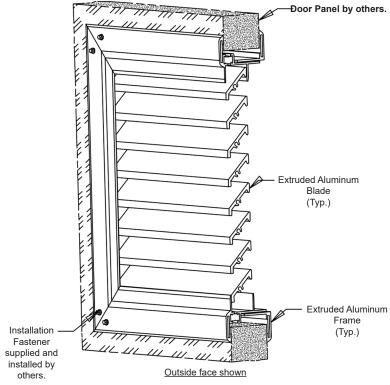

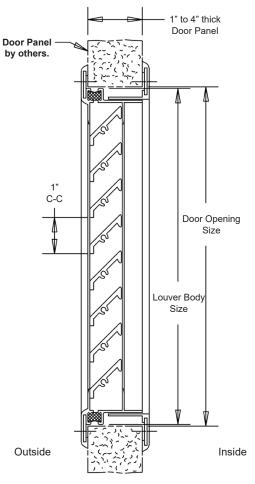

Page 1

Installation Fastener supplied and installed by others.

Not to scale.

Ν	Jot	tο	sca	le
	4Ot	ιO	Sua	

ltem #	<u>Oty</u>	Width	Height	Width	Height	NA II:	Туре	Location		
		<u>Openi</u>	ng Size	Louv	<u>er Size</u>	<u>Mullion</u>	<u>Screens</u>			<u>Union Made</u>
Arch. /	[/] Eng.:					EDR:		ECN:	<u>Job:</u>	
<u>Contr</u>	ractor:									
<u>P</u> 1	roject:			_		<u>Date:</u>		<u>DWN:</u>	<u>DWG:</u>	

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853 Phone: 570-746-1888 • Fax: 570-746-9286 www.cescoproducts.com