

## Standard Construction and Materials

**FRAME:** 18-GA. galvanized steel.

**BLADE:** 18-GA. galvanized steel. Blades approximately 4 1/8" on centers.

**SCREEN:** (When indicated)

1/2" mesh, 19-GA. galvanized steel (.041").

**CONSTRUCTION:** Riveted and/or welded, full jambs with blades, head and sill contained within.

## Options

Flange Frame available.

Finishes - Enamels, Epoxies, etc.

Screens - Insect screen 19/16 aluminum mesh,

-or- 1/2" flattened aluminum, .051",

-or- 1/4" sq. mesh, 18-GA galvanized steel, .047",

-or- 1/2" sq. mesh, 18-GA stainless steel, .047",



Others available.

## Notes


1. Nominal deductions will be made to the opening size given.
2. Approximate shipping weight is 7.0 lbs./sq.ft.

## Louver Sizes


| Min Panel   | Max Single Panel |
|-------------|------------------|
| 12"W x 12"H | 60"W x 96"H      |

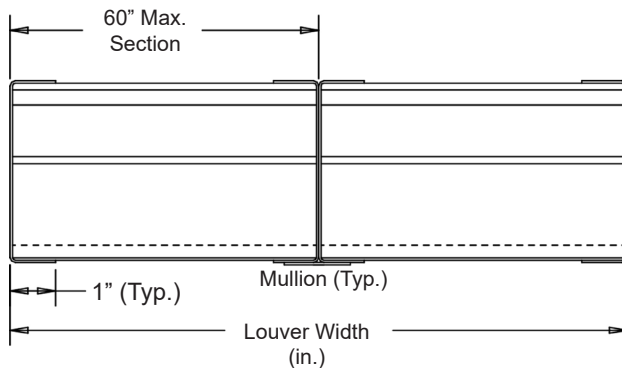

Head




Sill



Jamb

Flanged Frame Available

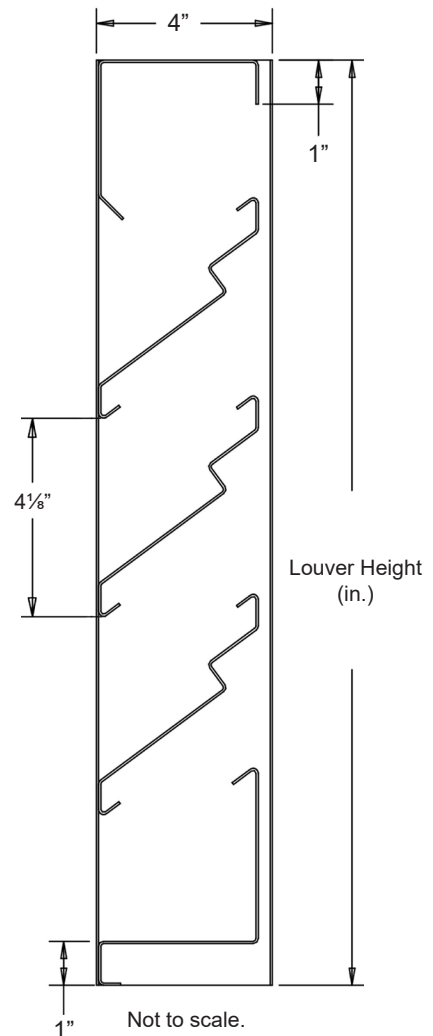

|               |     |              |        |             |        |         |      |          |         |      |  |                                                                                       |
|---------------|-----|--------------|--------|-------------|--------|---------|------|----------|---------|------|--|---------------------------------------------------------------------------------------|
|               |     |              |        |             |        |         |      |          |         |      |  |  |
| Item #        | Qty | Width        | Height | Width       | Height | Mullion | Type | Location |         |      |  |                                                                                       |
|               |     | Opening Size |        | Louver Size |        |         |      |          | Screens |      |  |                                                                                       |
| Arch. / Eng.: |     |              |        |             |        | EDR:    |      | ECN:     |         | Job: |  | Union Made                                                                            |
| Contractor:   |     |              |        |             |        |         |      |          |         |      |  |                                                                                       |
| Project:      |     |              |        |             |        | Date:   |      | DWN:     |         | DWG: |  |                                                                                       |

In the interest of product development, Cesco Products reserves the right to make changes without notice.



## Performance Data

Pressure Drop: .07 in. w.g. at 650 fpm (Intake)

Free Area: 8.25 sq.ft. = 51.6% for 48"W x 48"H sample tested in accordance with AMCA Standard 500-L.

Beginning Point of Water Penetration: 643 fpm

Ratings do not include effects of a screen.

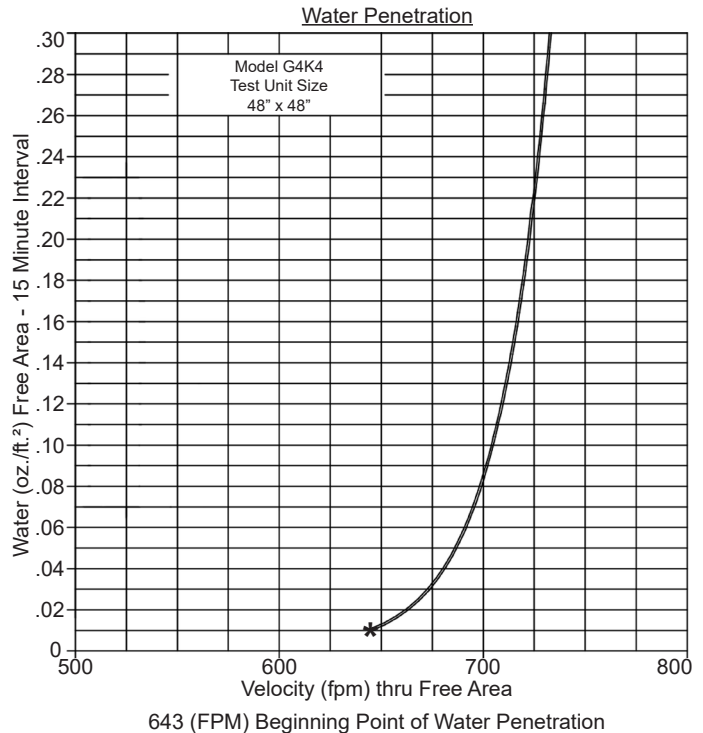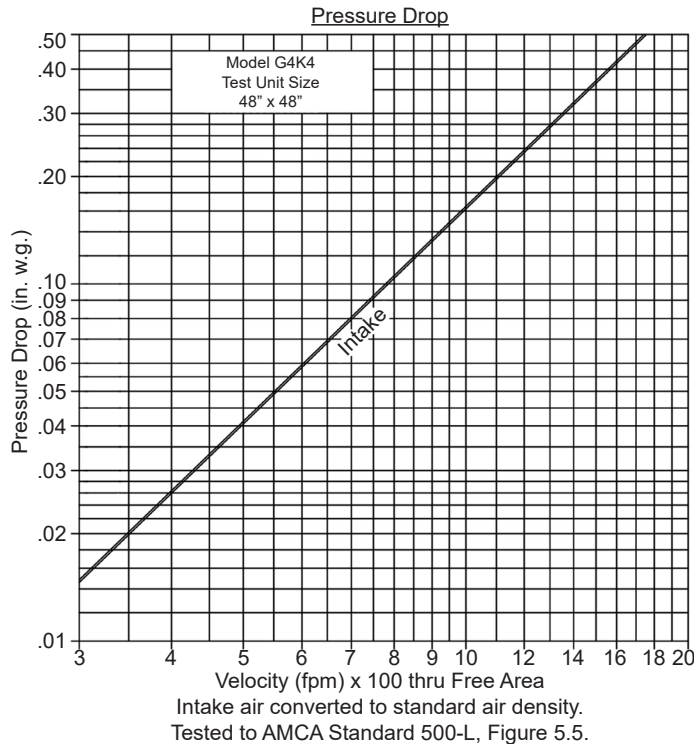

Free Area (sq.ft.)

|              |     | Width (in.) |      |      |       |       |       |       |       |       |
|--------------|-----|-------------|------|------|-------|-------|-------|-------|-------|-------|
|              |     | 12"         | 18"  | 24"  | 30"   | 36"   | 42"   | 48"   | 54"   | 60"   |
| Height (in.) | 12" | .26         | .41  | .57  | .72   | .87   | 1.03  | 1.18  | 1.34  | 1.49  |
|              | 24" | .78         | 1.25 | 1.71 | 2.18  | 2.65  | 3.12  | 3.58  | 4.05  | 4.52  |
|              | 36" | 1.27        | 2.03 | 2.80 | 3.56  | 4.32  | 5.08  | 5.85  | 6.61  | 7.37  |
|              | 48" | 1.76        | 2.82 | 3.88 | 4.94  | 6.00  | 7.05  | 8.25  | 9.17  | 10.23 |
|              | 60" | 2.32        | 3.72 | 5.11 | 6.50  | 7.89  | 9.29  | 10.68 | 12.07 | 13.47 |
|              | 72" | 2.81        | 4.50 | 6.19 | 7.87  | 9.56  | 11.25 | 12.94 | 14.62 | 16.31 |
|              | 84" | 3.30        | 5.28 | 7.26 | 9.24  | 11.21 | 13.19 | 15.17 | 17.15 | 19.13 |
|              | 96" | 3.78        | 6.06 | 8.33 | 10.60 | 12.87 | 15.14 | 17.41 | 19.68 | 21.95 |



Cesco Products certifies that the Model G4K4 shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air Performance Ratings only.