


View Ports • Single or Double Pane • Complete View Port Assemblies • Extruded Aluminum

Standard Construction and Materials**INNER FRAME:** .060" thick (nominal) 6063-T52/T6 extruded aluminum.**OUTER FRAME:** .060" thick (nominal) 6063-T52/T6 extruded aluminum.**GLASS:** ¼" thick, all panes.**GASKET:** Neoprene / Ether.**MOUNT HOLES:** On corners as standard. Available with no holes.**FINISH:** Mill.**Notes**

1. Unless otherwise specified, door will be fabricated $\frac{3}{16}$ " under listed size.
Dimensional tolerance is $\pm .075$.
2. View size is $1\frac{1}{16}$ " under nominal opening size.
3. View port will accommodate a maximum wall thickness of $2\frac{1}{4}$ ". Consult factory if wall size is less than $1\frac{3}{16}$ " thick.
4. View port units are not leak proof.


View Port Sizes

Min Size	Max Size
6"W x 6"H	24"W x 24"H

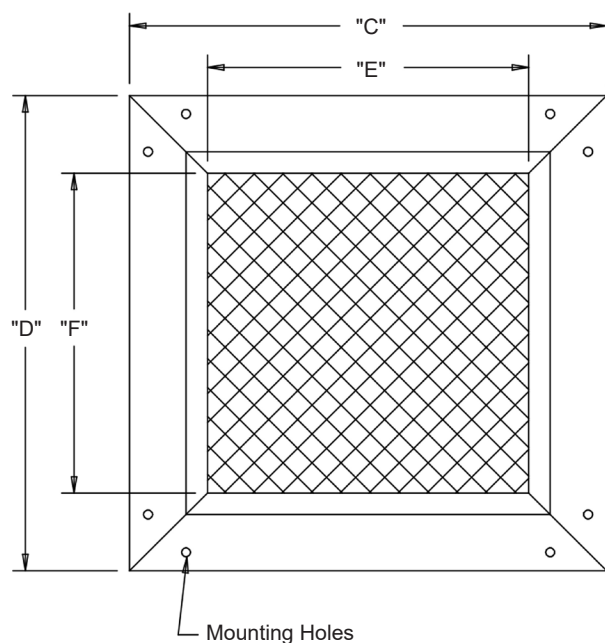

Available Models

VCDP - Double Pane Clear Glass
VCDT - Laminated Safety Glass and Clear
VCDW - Double Pane Laminated Safety Glass and Clear
VCSP - Single Pane Clear Glass
VCSW - Single Pane Laminated Safety Glass

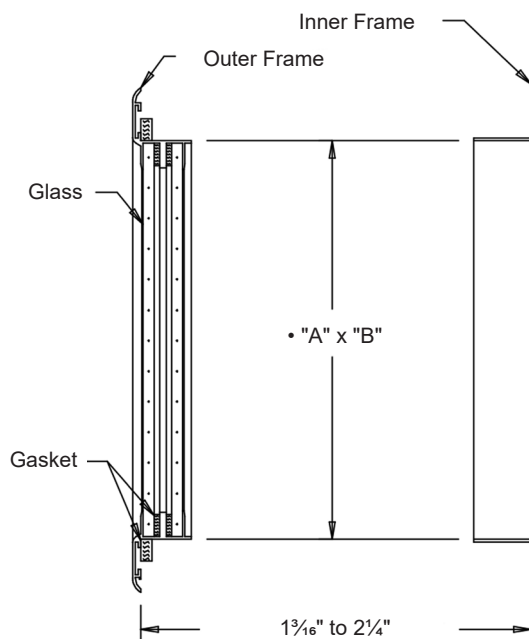

Not to scale.

											
Item #	Qty	Single	Double	Viewport Models	"A" Width	"B" Height	"C" Width	"D" Height	"E" Width	"F" Height	
		VCS Panes			Opening Size		Outside Frame Size		View Size		
Arch. / Eng.:					EDR:		ECN:		Job:		
Contractor:											
Project:					Date:		DWN:		DWG:		

In the interest of product development, Cesco Products reserves the right to make changes without notice.