


Insulated Blank-Off Panels

NOTES

Aluminum Louvers: 22-GA aluminum skins with styrofoam insulation
Steel Louvers: 20-GA galvanized steel skins with styrofoam insulation

Insulated blank-off panels can be used to blank off all or portions of louver.
Blank-off panels can be mounted on the front or rear face of louver.
Customer to provide blank-off dimensions and mounting location when ordering.
Screens are not typically used when blank-offs are installed unless otherwise specified.

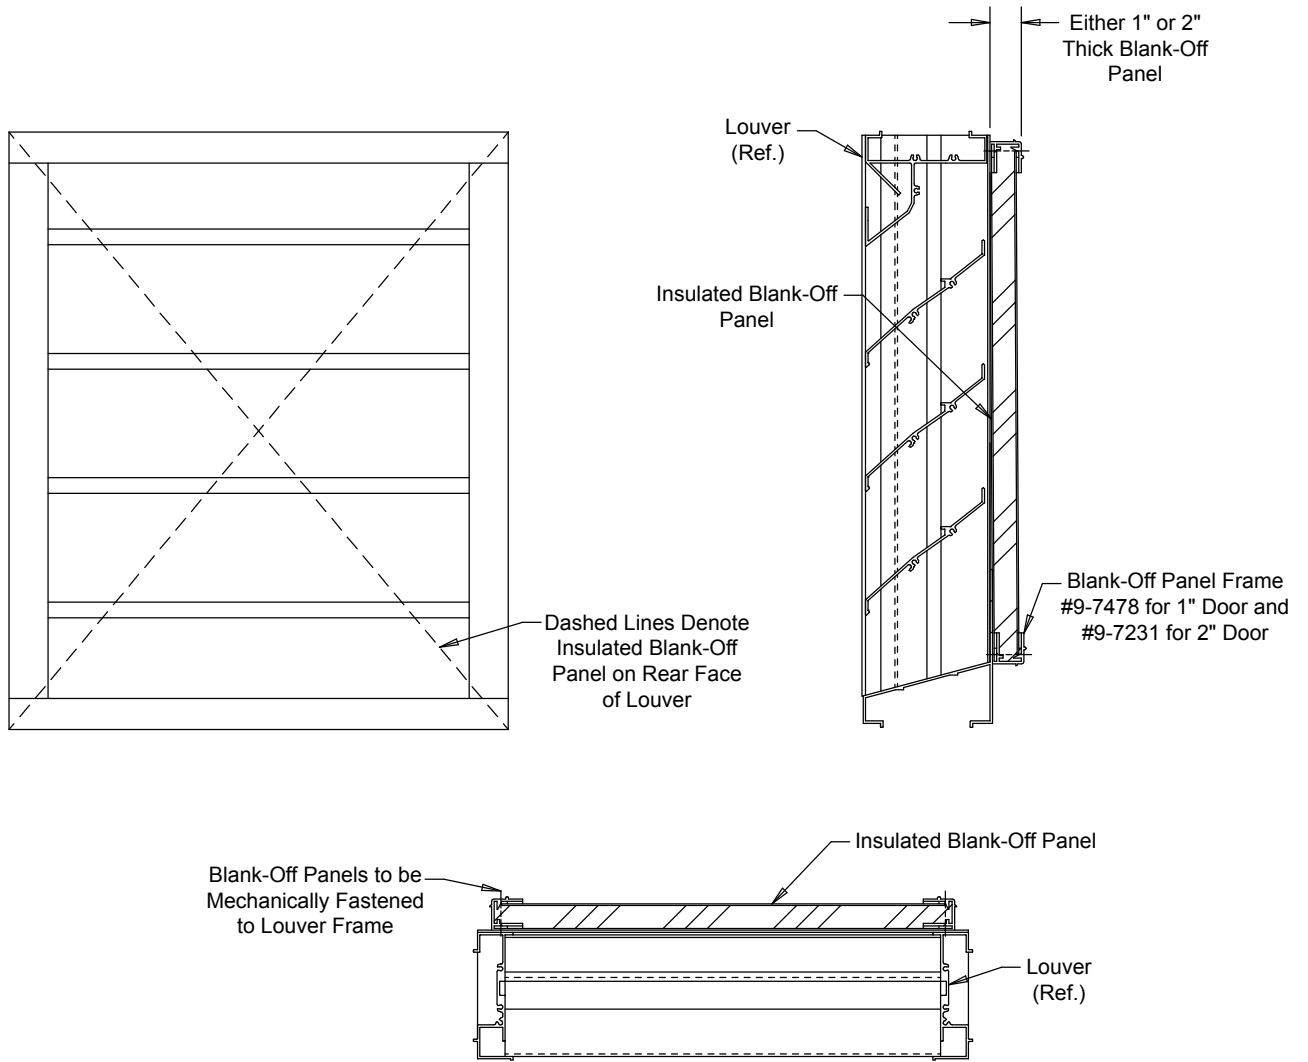

Insulated Blank-Off Panels

This page intentionally left blank.

