Dual

Acting Handles

Standard Access Doors • 4" Deep • Out-Swing • With Louver • Extruded Aluminum

'Y' **=**

'X'

Standard Construction and Materials

FLANGED FRAME: .080" thick (nominal) 6063-T52/T6 extruded aluminum. **DOOR FRAME:** .080" thick (nominal) 6063-T52/T6 extruded aluminum.

DOOR PANELS: 20 GA. galvanized steel.

INSULATION: 2.25 lb. density polyurethane foam.

HANDLES: Dual-acting die cast zinc.

GASKET: Continuous length extruded foam santoprene.

HINGE: Stainless steel continuous type.

FINISH: Mill.

Options

Door panel material: bonderized steel, stainless steel, aluminum Finishes - Baked Enamel, Baked Epoxy, or Prime Coat

Notes


- 1. Hinge always furnished on "B" height dimension.
- 2. (L) designates doors with louvers. Specify (L/H) left hand or (R/H) right hand hinge when viewing from the outside.
- 3. Minimum louver size is 12" x 12". Maximum louver size is full door panel size. For louver location, use "X" and "Y" dimensions.
- 4. Unless otherwise specified, door will be fabricated 1/4" under listed size. Dimensional tolerance is \pm .075.
- 5. Door width cannot exceed two times its height.
- 6. Please refer to the installation instructions for mounting of handles and door assembly mounting.
- 7. In-swing doors are recommended for positive pressures. Out-swing doors are recommended for negative pressures.

Door Sizes

Min Size	Max Size				
12"W x 12"H	48"W x 96"H				

Door Panel View Minus Door Frame (Left hinge units shown.)

Not to scale.

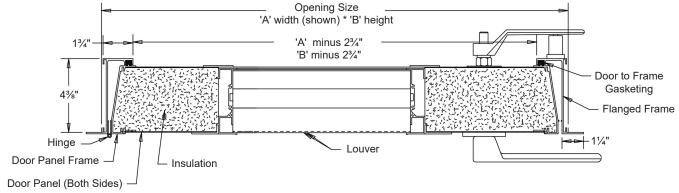

Item #	Qty	Left Hand	Right Hand	"A" Width	"B" Height	1	Model -40 EA-400-F)	Х	Υ		
		Door	Door Hinge Opening Size		Louver Size (Width, Height, O.D. of Flange)		Louver Location			<u>Union Made</u>	
Arch. / Eng.:					EDR:		ECN:		Job:		
Contractor:											
Project:					Date:		DWN:			DWG:	

In the interest of product development, Cesco Products reserves the right to make changes without notice.

