

Hurricane Louver

IL69

6" Deep • Fixed Drainable Blade • Severe Weather Louver

STANDARD CONSTRUCTION

- HEAD:** .125" thick; extruded 6063-T5 aluminum
- SILL:** .125" thick; extruded 6063-T6 aluminum
- JAMBS:** .125" thick; extruded 6063-T5 aluminum
- BLADE:** .081" thick; extruded 6063-T5 aluminum
- ASSEMBLY:** Welded and mechanical fastened
- FINISH:** Mill
- SCREEN:** 1/2" removable expanded aluminum bird screen located on interior
- MULLIONS:** Exposed, vertical with 1 3/4" x .08" 6063-T5 extruded aluminum cover (multiple panels only); Hidden, horizontal
- DESIGN DATA:** NOA No: 05-1206.03 - TAS 100 with damper in sleeve
TAS 201, 202, 203 (180 PSF ≥ 36"W; 150 PSF < 36"W)

This system has been tested for water infiltration resistance and is a water resistant system when an A20/A21 damper is installed with the louver panel.

NOA No: 08-1030.05 - TAS 201, 202, 203 (150 PSF)

This system has not been tested for water infiltration resistance and is not a water resistant system.

OPTIONS


- Finishes - Baked Enamel, Kynar, Anodize
- Variety of bird and insect screens
- See Available Option Chart for all other Options

NOTES

1. "A" width and "B" height are opening dimensions. Louvers are provided approximately 1/2" undersize.
2. NOA No: 05-1206.03: Panels over 60"W will have a 1 1/2" x 1 1/2" x .125" 6063-T5 support angle mounted vertically on interior at approximately midpoint full length of the louver.
- NOA No: 08-1030.05: Panels over 30"W will have a 1 1/2" x 1 1/2" x .125" 6063-T5 support angle mounted vertically on interior at approximately midpoint full length of the louver.
3. Muller panels may be horizontally installed to an unlimited number. Vertical stacking of mulled panels may occur providing a structural support is designed and installed by others to support all loads transferred from the louver assembly (single panel may run to unlimited height per elevation if no mullion exists).
4. Approved opening types: wood, steel, or concrete/masonry (masonry acceptable at jambs only, head and sill must be concrete). Anchoring details may vary.
5. Units are supplied with mounting angles, structural steel and mounting hardware for concrete installation as a standard. Please specify if louver are to be mounted in substrate other than concrete.
6. See installation sketches for required mounting structure.

LOUVER SIZE

| Panels | Minimum Panel | Maximum Single Panel |
|--------------------|---------------|----------------------|
| NOA No: 05-1206.03 | 12"W x 12"H | 96"W x 96"H |
| NOA No: 08-1030.05 | 12"W x 12"H | 60"W x 96"H |

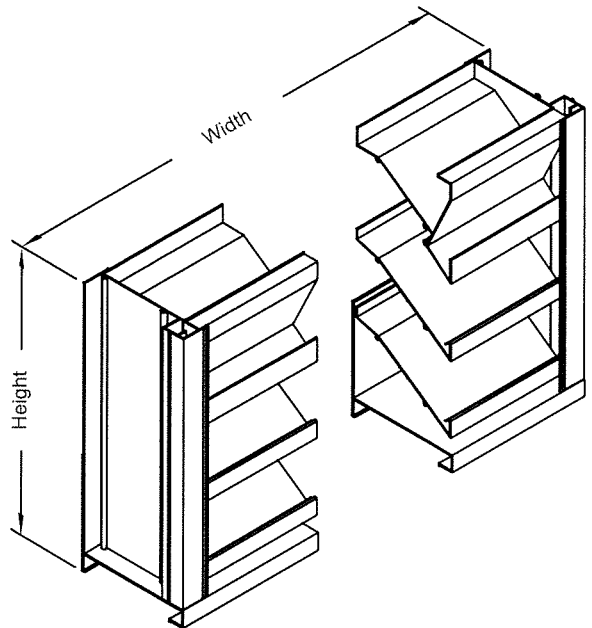


| Option | NOA No: 05-1206.03 | | NOA No: 08-1030.05 |
|--------------------------------|--------------------|--------|--------------------|
| | Screwed | Welded | w/Structural Steel |
| .125" Blades | No | Yes | STD* |
| Architectural Vertical Mullion | No | No | Yes |
| Welded Construction | No | STD* | STD* |
| Screwed Construction | Yes | No | No |
| Flanges 1 1/2"W x 1/8" thick | Yes | Yes | Yes |
| Extended Sill | Yes | Yes | Yes |
| Sill Pan | Yes | Yes | STD*† |
| Sleeve‡ | Yes | Yes | No |
| Sleeve with Damper‡ | Yes | Yes | No |
| Special Shape | No | Yes | No |

*STD indicates this feature is standard construction for specified version and no other option is available.


†Sill Pan standard construction for Architectural Vertical Mullion. Optional construction for Visible Vertical Mullion.

‡See SI-SLVHRL-08.11 for more information.

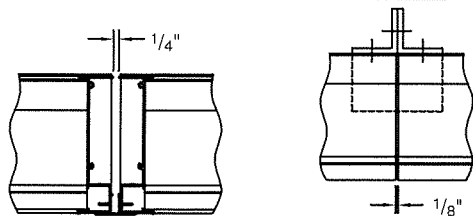

Standard Exposed Vertical Mullion (Available for NOA No: 05-1206.03)

Optional Architectural Vertical Mullion (Available for NOA No: 08-1030.05)

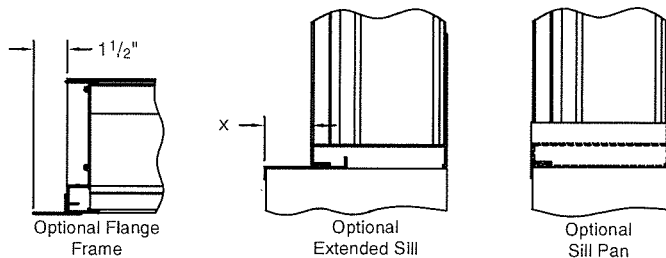

Optional Flange Frame

Optional Extended Sill

Optional Sill Pan



Louvers & Dampers certifies that the model IL69 louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air Performance Ratings only.

Louvers **& D** Dampers

A Messtex Company

SD-IL69-08.12

P.O. Box 606 • 7435 Industrial Rd • Florence, KY 41042 • Phone (859) 647-2299 • Fax (859) 647-7810

December 2008

6" Deep • Fixed Drainable Blade • Severe Weather Louver


Water Penetration: 0.01 oz. (3.0 g.) at 1250 fpm (6.35 m/s) maximum recommended free area velocity

Air Performance: 0.21 in.wg (52.1 Pa) at 1250 fpm (6.35 m/s) and 11550 SCFM (5.45 scm/s)

Free Area: 9.24 sq.ft. (0.858 sq.m) = 58% for 48"W x 48"H (1.22m x 1.22m) test size

1. Test size is 48"W x 48"H (1.2m x 1.2m).
2. Ratings do not include the effect of a screen.
3. Data is at standard air density (0.75 lbs/cu ft).
4. AMCA Ratings do not apply to special shapes.

Air Performance - Intake

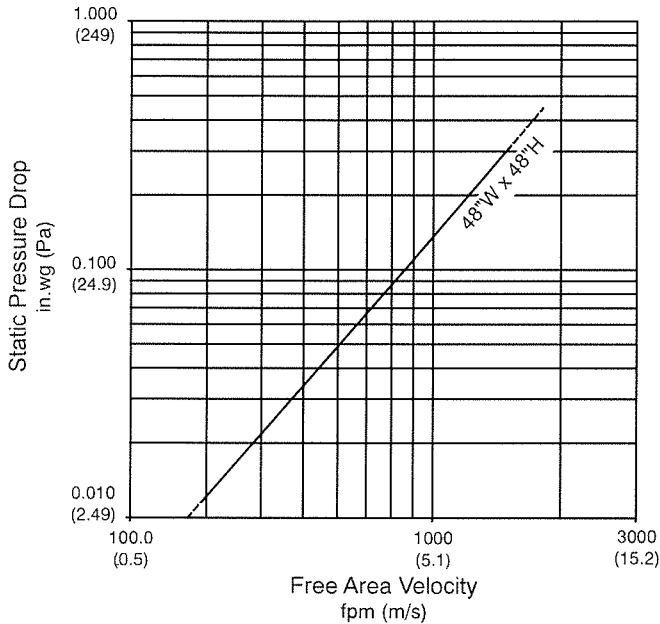

Water Penetration

(15 min duration) Less than .01 oz./sq.ft.
 AMCA standards are based on a maximum of 1250 fpm free area velocity and a minimum of .01 oz./sq.ft. of free area water penetration. The AMCA test was unable to determine the beginning point of water penetration, since it lies above 1250 fpm free area velocity.

To determine minimum free area required for louver:

1. Divide the required flow by the maximum recommended free area velocity.
2. Select the most desirable louver size from the free area table that meets the minimum free area that is required.
3. Compare specified performance to the certified water penetration and air performance ratings.

Example:

Given 15,000 CFM design flow


$$1. \text{ minimum free area} = \frac{\text{design flow}}{\text{max recommended velocity}}$$

$$\text{minimum free area} = \frac{15,000}{1250} = 12.0 \text{ sq.ft.}$$

2. From the free area table, the required louver size is 48"W x 60"H.

Free Area in sq.ft. (sq.m)

| | | Nominal Width in Inches (mm) | | | | | | | |
|-------------------------------|--------------|------------------------------|-----------------|------------------|------------------|------------------|------------------|------------------|------------------|
| | | 12 (305) | 24 (610) | 36 (914) | 48 (1219) | 60 (1524) | 72 (1829) | 84 (2134) | 96 (2438) |
| Nominal Height in Inches (mm) | 12 (305) | 0.18 (0.017) | 0.43 (0.040) | 0.69 (0.064) | 0.94 (0.087) | 1.16 (0.108) | 1.42 (0.132) | 1.67 (0.155) | 1.93 (0.179) |
| | 24 (610) | 0.69 (0.064) | 1.70 (0.158) | 2.70 (0.251) | 3.71 (0.345) | 4.59 (0.426) | 5.59 (0.519) | 6.60 (0.613) | 7.60 (0.706) |
| | 36 (914) | 1.21 (0.112) | 2.96 (0.275) | 4.72 (0.439) | 6.47 (0.601) | 8.01 (0.907) | 9.76 (0.907) | 11.52 (1.070) | 13.27 (1.233) |
| | 48 (1219) | 1.72 (0.160) | 4.23 (0.393) | 6.73 (0.625) | 9.24 (0.858) | 11.43 (1.062) | 13.93 (1.295) | 16.44 (1.527) | 18.94 (1.760) |
| | 60 (1524) | 2.24 (0.208) | 5.49 (0.510) | 8.75 (0.813) | 12.00 (1.115) | 14.85 (1.380) | 18.11 (1.380) | 21.36 (1.984) | 24.62 (2.287) |
| | 72 (1829) | 2.75 (0.255) | 6.76 (0.628) | 10.76 (1.000) | 14.77 (1.372) | 18.27 (1.697) | 22.28 (2.070) | 26.28 (2.441) | 30.29 (2.814) |
| | 84 (2134) | 3.27 (0.304) | 8.02 (0.745) | 12.78 (1.187) | 17.53 (1.629) | 21.69 (2.015) | 26.45 (2.457) | 31.20 (2.899) | 35.96 (3.341) |
| | 96 (2438) | 3.78 (0.351) | 9.29 (0.863) | 14.79 (1.374) | 20.30 (1.886) | 25.12 (2.334) | 30.62 (2.845) | 36.13 (3.357) | 41.63 (3.868) |



Louvers & Dampers certifies that the model IL69 louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air Performance Ratings only.