



ROOF CURB EXTENSION

S-CEX

Formed Steel

STANDARD CONSTRUCTION

- Fabricated of 18 gauge galvanized steel. All seams are fully welded and sprayed with protective coating.
- Mill finish is standard.
- If either dimension exceeds 90" multisection construction may be required.

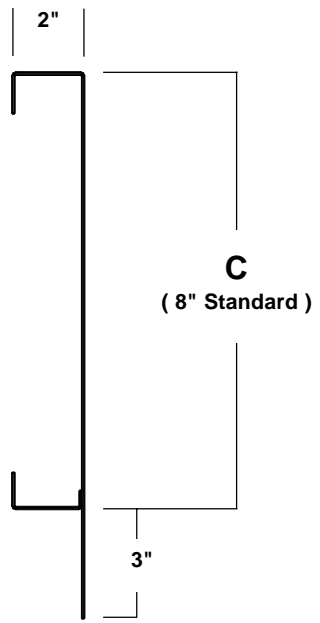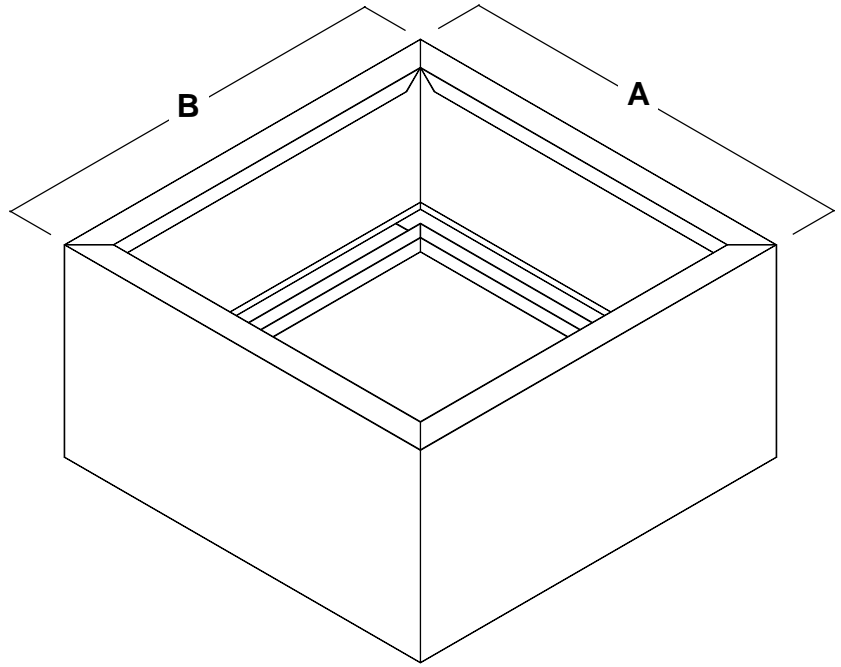

| 'A' (width) | 'B' (width) | 'C' (height) | Qty | Options / Accessories / Variations |
|-------------|-------------|--------------|-----|------------------------------------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |

PROJECT _____ LOCATION _____
 ARCH/ENGR _____ CONTRACTOR _____
 REPRESENTATIVE _____ DATE _____

LD Louvers & Dampers

A DIVISION OF MESTEK, INC.
 P.O. Box 606 • 7435 Industrial Rd • Florence, KY 41042 • Phone (859) 647-2299 • Fax (859) 647-7810

OPTIONS / ACCESSORIES

MATERIAL

Steel products are available in various gauges of Galvanized, Galvaneal or Stainless.

PLATFORM CAP

A 3/4" plywood top with a metal cap fabricated of the same material as the product.

WOOD NAILER

Factory installed wood nailer for equipment mounting is mechanically fastened to top perimeter.

GASKET

1/4" thick polyurethane foam gasket can be installed, lining the entire top perimeter.

INSULATION

Available with either 1" or 2" Semi-Rigid insulation.

ACCESS PANELS

To provide a passageway to internal equipment, an access opening is cut and lined with a protective vinyl edge seal and the cover panel is mechanically fastened over the opening. Minimum height restrictions apply.

LOUVERED VENTS

To provide an airflow through the curb, units are available with 6" wide x 7/8" high louvered vents, with 4 per side. Minimum height restrictions apply.

FINISHES

A wide selection of finishes including Baked Enamel, Epoxy, or Prime Coat.