Model CAD - CSD

Roof Curb Adapter • Aluminum or Steel

STANDARD CONSTRUCTION

Formed Aluminum Curb Adapter

SHELL & BASEPLATE: .063” thick (nominal) aluminum alloy 3003-H14. All seams are fully welded and sprayed with protective coating.
FINISH: Mill.

Formed Steel Curb Adapter

SHELL & BASEPLATE: 18 GA. galvanized steel. All seams are fully welded and sprayed with protective coating.
FINISH: Mill.

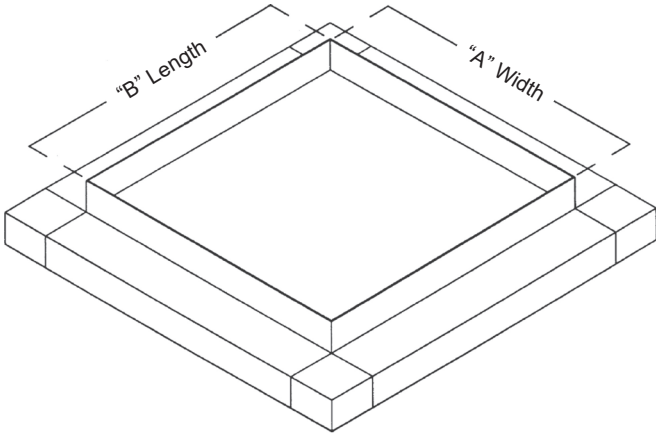

OPTIONS

Aluminum Material - Available in .081” - .125” thick 3003-H14 alloy.
Steel Material - Available in various gauges of galvanized, galvaneal or stainless.
Finishes - A wide selection of finishes include baked enamel, epoxy, or prime coat. Aluminum curb finishes include Kynar, clear or color anodize.

NOTES

1. “A” width, “B” length and “C” height are outside dimensions.
2. If height or width exceed 90”, multi-section construction may be required.

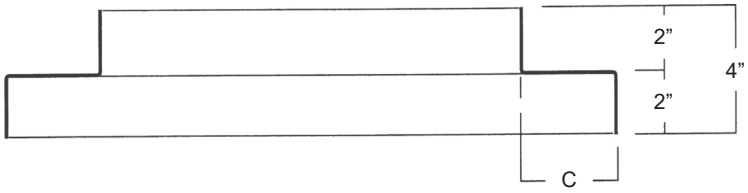

Item #	**Qty**	**Width**	**Length**	**Height**	Aluminum	Steel	Height Rise	Direction	
		Opening Dimensions			**Material**		**Pitch / Peak**		**Union Made**
Arch. / Eng.:				**EDR:**		**ECN:**		**Job:**	
Contractor:									
Project:				**Date:**		**DWN:**		**DWG:**	

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

Louvers & Dampers
A Mestek Company

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286