

Backdraft Damper • 7½" Deep • Single Thickness Blade • Round Frame • Galvanized Steel • -35°F to 180°F Temperature

STANDARD CONSTRUCTION


- FRAME:** 16 GA. galvanized steel, 7½" deep.
- BLADE:** 16 GA. galvanized steel, reinforced for frames over 18" dia.
- AXLE:** ½" dia. plated steel stub.
- BEARINGS:** Flange oilite bronze.
- SEALS:** On frame, ¼" thick closed cell neoprene. Temperature range is -35°F to 180°F.
- FINISH:** Mill.

OPTIONS

Counter balance - mounted to blade or installed on extended shaft.

NOTES


1. ¼" nominal deduction will be made to the opening size given.
2. Please contact the factory for damper sizes larger than 36" diameter.
3. When ordering a counter balance, please specify type: assist or resist opening.
4. Damper sizes of 12" dia. and less shall have a counter balance located on an extended shaft only.
5. To calculate approximate shipping weight (lbs./in.), use following formula:
 Damper Circumference (Diameter [in.] × 3.141) × 0.5

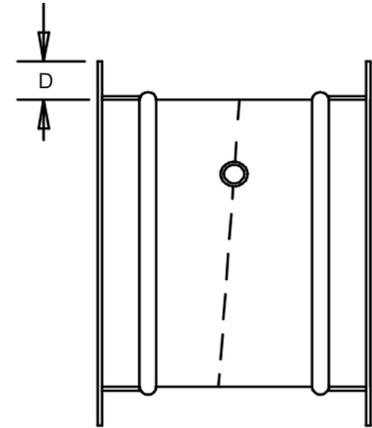

Equal leg angles are available. They are welded to frames at intermittent spacing and caulked between welds. Flange Height "D" varies with damper diameter.

DAMPER SIZES

Minimum Size	Maximum Size
4" O.D.	36" O.D.

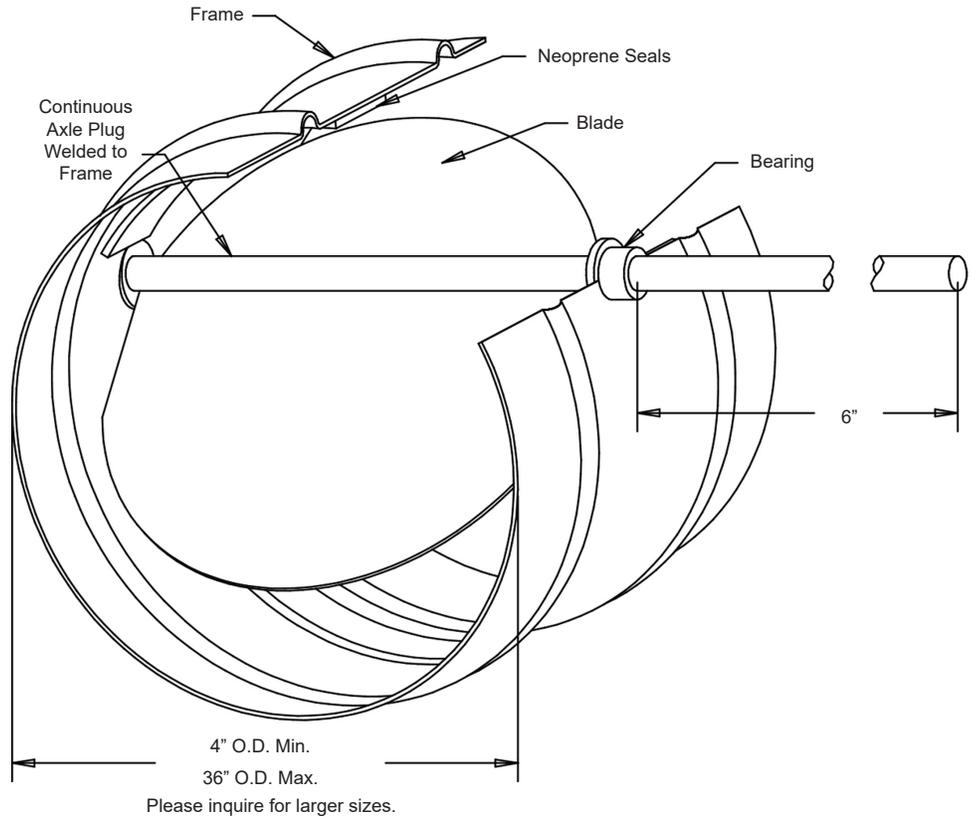

Item #	Qty	Damper Size O.D.	Counter Balance		Remarks	 Union Made
			Assist	Resist		
Arch. / Eng.:			EDR:		ECN:	Job:
Contractor:						
Project:			Date:		DWN:	DWG:

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.