

Model L11F

Extruded Aluminum Louver • 1" to 4" Deep • 45° Straight Blades • Flanged Frame • Door Louver

STANDARD CONSTRUCTION

FRAME: .060" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.

BLADE: .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.

SCREEN: (When indicated.)

¹⁹/₁₆ mesh, .011" dia. aluminum wire, insect screen.

FINISH: Mill

OPTIONS

Finish - Baked Enamel, Kynar, Anodize

Screens - ¹/₂" sq. mesh, 19 GA galvanized steel, .041",

-or- ¹/₂" flattened aluminum, .051",

-or- ¹/₄" sq. mesh, 18 GA galvanized steel, .047",

Plus others.



NOTES

1. Unless otherwise specified, ¹/₈" deductions will be made to the opening size given.

2. Approximate shipping weight is 3.0 lbs./sq.ft.

LOUVER SIZES

Min Panel	Max Single Panel
6"W x 6"H	24"W x 24"H

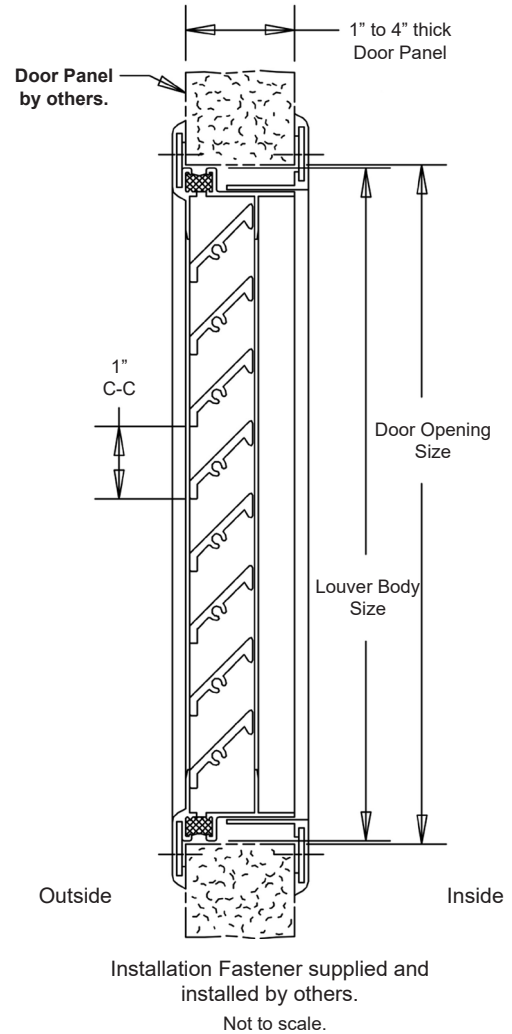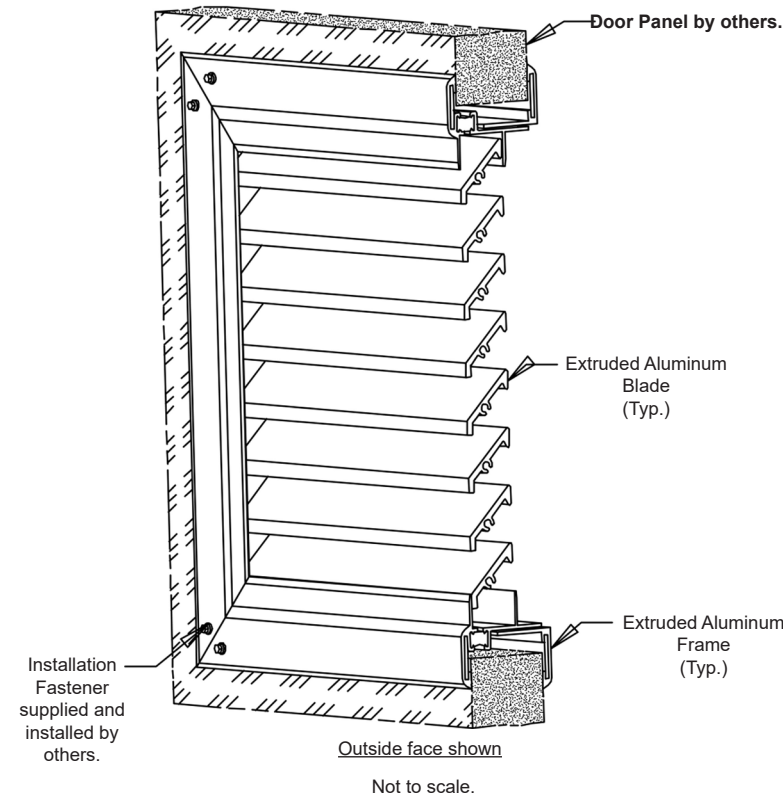

Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location	Union Made
		Opening Size		Louver Size			Screens		
Arch. / Eng. :						EDR:		ECN:	Job:
Contractor:									
Project:						Date:		DWN:	DWG:

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286

