

INDOOR UNIT

CODE OPTIONS

CSD-1 Manual Reset LWCO

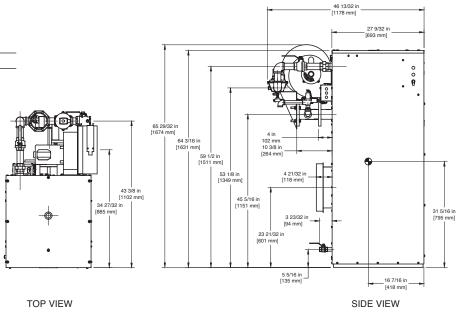

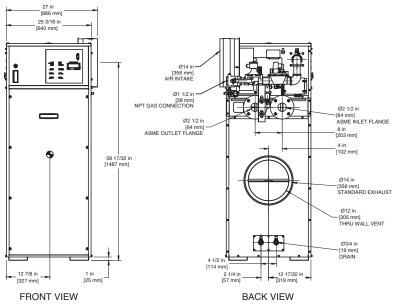

Notes:

- 1. Dimensions are approximate and should not be used to "rough-in" equipment.
- 2. Dimensions are subject to change without notice.

BOILER CERTIFIED RATINGS & CAPACITIES

Fuel Type	Natural/Propane Gas	Boiler FLA	11.5*
Input BTU/hr.	1,950,000 / 571 kW	Min. Gas Pressure Required	5"W.C.**
Output BTU/hr.	1,657,500 / 486 kW	Max. Gas Pressure Allowed	14" W.C.
Electrical Requirements	120 VAC / 1 ph / 60 hz	Operating Weight	863 lbs. / 392 kg.

BOILER / WATER HEATER TRIM & CONTROLS

Main Gas Valve	V4944B	Main Ball Valve	1 1/2 "
Firing Valve	1 1/2"	Pilot Regulator	White-Rodgers 25M
Safety Valve	ASCO L8214G 1 1/2"	Air Switch	HUBA
Ignition Control	Honeywell RM7897C	Blower Motor	Marathon 3/4 hp - FLA 9.8
Operating Control (FB/FW)	Jumo	Relief Valve - FB	1" x 1 1/4" set @ 50 psi
High Limit	Honeywell L4008E	Relief Valve - FW	3/4" x 3/4" set @ 125 psi
		Flow Switch	TACO

A.S.M.E.

ASME Sect IV Htg Surface	215.98 Sq. Ft. / 20.06 Sq. M.	Design Data	Max. 160 psig & 250°F	
Water Volume	5.7 gal / 21.6 Liters			

- Add circulator amps
- ** For incoming gas pressures lower than 5" W.C. natural or 11" W.C. propane, consult factory.

BOILER TEMPERATURE RISE / PRESSURE DROP

25°F / 13.9°C			30°F / 16.7°C				35°F / 19.4°C				
Flow	Rate	ite Pressure Drop		Flow Rate		Pressure Drop		Flow Rate		Pressure Drop	
GPM	L/s	Ft	kPa	GPM	L/s	Ft	kPa	GPM	L/s	Ft	kPa
132.6	8.4	5.14	15.1	110.5	7.0	3.70	10.8	94.7	6.0	2.80	8.1


WATER HEATER HOURLY RECOVERY CAPACITY (GPH & LPH)

40°F	22°C	60°F	33℃	80°F	44°C	100°F	56°C	120°F	67°C	140°F	78°C
4976	18809	3317	12539	2488	9405	1990	7524	1659	6270	1422	5374

Futera II 1950 model water heater not available for sale in Canada due to NRCan Regulations.

REP FIRM	FUTERA II 1950
JOB NAME	Category I or Category III Appliance (see Installation and Operation Manual for venting information)
ENGINEER CONTRACTOR DATE	 A Division of Mestek, Inc. Westfield, MA 01085 (413) 568-9571

OUTDOOR UNIT

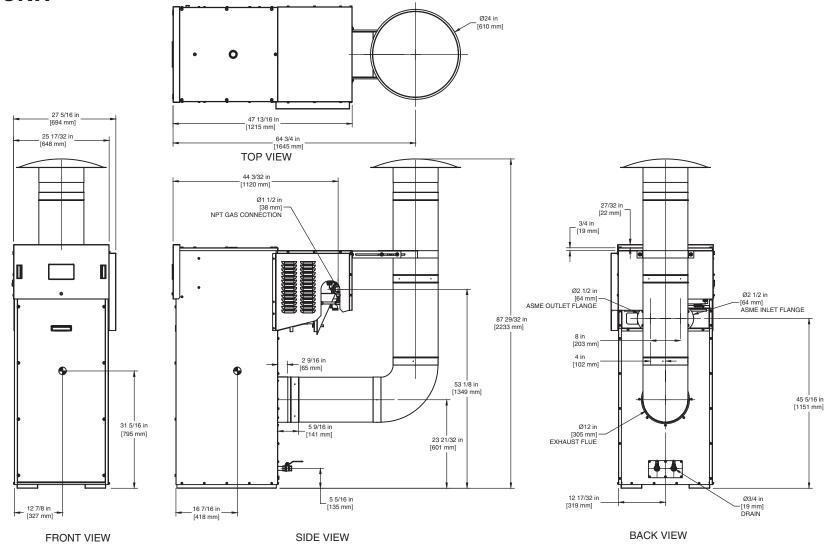

FUTERA II 1950

Notes:

- Dimensions are approximate and should not be used to "rough-in" equipment.
 Dimensions are subject to change without notice.