
INDOOR UNIT

CODE OPTIONS

CSD-1 Manual Reset LWCO

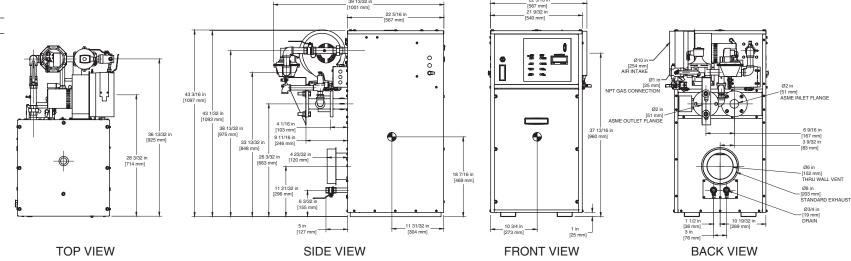

Notes:

- 1. Dimensions are approximate and should not be used to "rough-in" equipment.
- 2. Dimensions are subject to change without notice.

BOILER CERTIFIED RATINGS & CAPACITIES

Fuel Type	Natural/Propane Gas	Boiler FLA	5.3*
Input BTU/hr.	500,000 / 147 kW	Min. Gas Pressure Required	5"W.C.**
Output BTU/hr.	425,000 / 125 kW	Max. Gas Pressure Allowed	14" W.C.
Electrical Requirements	120 VAC / 1 ph / 60 hz	Operating Weight	422 lbs. / 192 kg.

BOILER / WATER HEATER TRIM & CONTROLS

Main Gas Valve	V4944B	Main Ball Valve	1"
Firing Valve	1"	Pilot Regulator	White-Rodgers 25M
Safety Valve	ASCO L8214G 1"	Air Switch	HUBA
Ignition Control	Honeywell RM7897C	Blower Motor	Fasco 1/4 hp - FLA 3.6
Operating Control (FB/FW)	Jumo	Relief Valve - FB	3/4" x 3/4" set @ 50 psi
High Limit	Honeywell L4008E	Relief Valve - FW	3/4" x 3/4" set @ 125 psi
		Flow Switch	TACO

A.S.M.E.

ASME Sect IV Htg Surface	69.51 Sq. Ft. / 6.46 Sq. M.	Design Data	Max. 160 psig & 250°F	
Water Volume	3.4 gal / 12.9 Liters			

- Add circulator amps
- ** For incoming gas pressures lower than 5" W.C. natural or 11" W.C. propane, consult factory.

BOILER TEMPERATURE RISE / PRESSURE DROP

20°F / 11.1°C				25°F / 13.9°C				
	Flow	Rate	Pressure Drop		Flow Rate		Pressure Drop	
	GPM	L/s	Ft	kPa	GPM	L/s	Ft	kPa
	42.5	2.7	0.53	1.5	34.0	2.1	0.35	1.0


WATER HEATER HOURLY RECOVERY CAPACITY (GPH & LPH)

40°F	22°C	60°F	33°C	80°F	44°C	100°F	56°C	120°F	67°C	140°F	78°C
1224	4629	816	3086	612	2314	490	1851	408	1543	350	1322

Boilers & Water Heaters not available for sale in Canada due to NRCan regulations.

REP FIRM SUBMITTED BY	FUTERA II 500
JOB NAME ARCHITECT	Category I or Category III Appliance (see Installation and Operation Manual for venting information)
ENGINEER CONTRACTOR DATE	A Division of Mestek, Inc. Westfield, MA 01085 (413) 568-9571

OUTDOOR UNIT

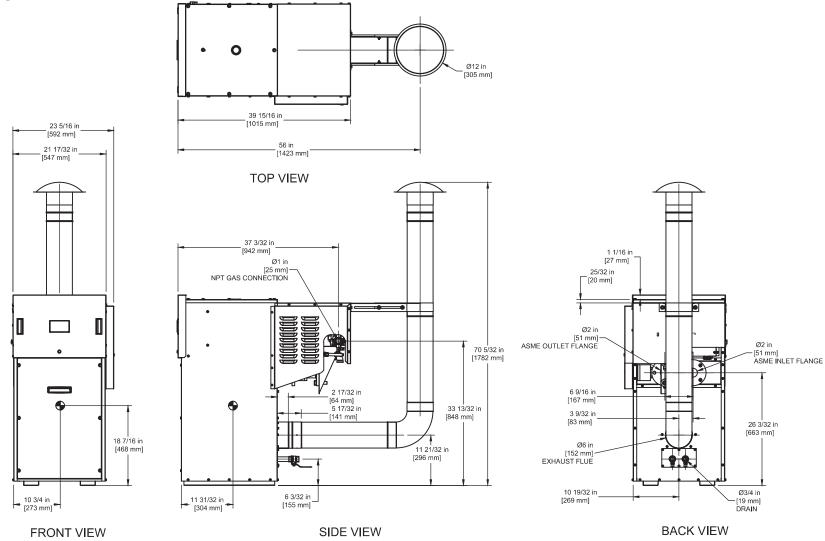

Boilers & Water Heaters not available for sale in Canada due to NRCan regulations.

Notes:

- 1. Dimensions are approximate and should not be used to "rough-in" equipment.
- 2. Dimensions are subject to change without notice.

FUTERA II 500