
#### **Category I or Category III Appliance**

(see Installation and Operation Manual for venting information)

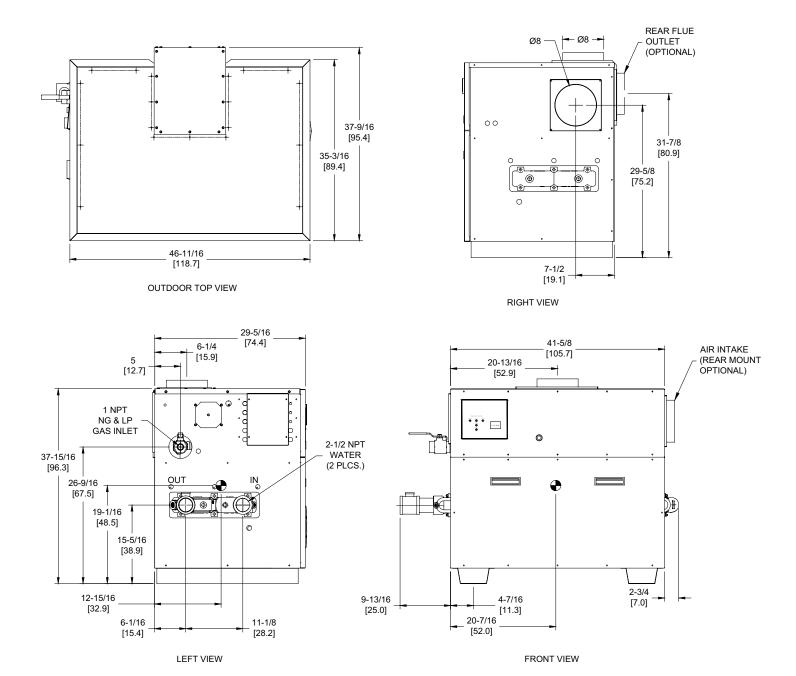

RSUB-17-F

#### Boilers & Water Heaters not available for sale in Canada due to NRCan regulations.

- **Notes:**1. Dimensions are approximate and should not be used to "rough-in" equipment.
- Dimensions are subject to change without notice.
- All dimensions are in inches (cm).
   Symbol indicates center of gravity.

#### **BOILER CERTIFIED RATINGS & CAPACITIES**

Fuel Type	Natural/Propane Gas	Boiler FLA	5.9*
Input BTU/hr.	750,000 / 220 kW	Min. Gas Pressure Required	7" WC**
Output BTU/hr.	615,000 / 180 kW	Max. Gas Pressure Allowed	14" WC
Electrical Requirements	120VAC/ 1 ph/ 60 hz	Operating Weight	554 lbs. / 252 kg.

## **BOILER / WATER HEATER TRIM & CONTROLS**

Main Gas Valve	Honeywell V8944B 1"	Pilot Valve	Honeywell VR8205Q
Firing Valve	Honeywell B200T1033 1"	Air Switch	Cleveland RSS-495
Safety Valve	Honeywell V48A 1"	Blower Motor	1/4 hp - FLA 5.1
Ignition Control	UTC 1003-61A	Relief Valve - LW	3/4" x 3/4" set @ 125 psi
Operating Control (LB/LW)	Jumo	Relief Valve - LB	3/4" x 3/4" set @ 50 psi
High Limit (LB/LW)	Jumo	Flow Switch	TACO

## A.S.M.E.

ASME Sect IV Htg Surface	61.7 Sq. Ft. / 5.73 Sq. M.	Design Data	Max. 160 psig & 250°F		
Water Volume	1.7 gal / 6.5 Liters				

<sup>\*</sup> Add circulator amps.

# **BOILER TEMPERATURE RISE / PRESSURE DROP**

	20°F /	′ 11.1°C			25°F/	13.9°C		30°F / 16.7°C				35°F / 19.4°C			
Flow	Rate	Pressur	re Drop	Flow	Rate	Pressur	e Drop	Flow	Rate	Pressur	e Drop	Flow	Rate	Pressur	e Drop
GPM	L/s	Ft	kPa	GPM	L/s	Ft	kPa	GPM	L/s	Ft	kPa	GPM	L/s	Ft	kPa
61.5	3.9	1.95	5.7	49.2	3.1	1.29	3.8	41.0	2.6	0.92	2.7	35.1	2.2	0.69	2.0

# WATER HEATER HOURLY RECOVERY CAPACITY (GPH & LPH)

40°F	22°C	60°F	33℃	80°F	44°C	100°F	56°C	120°F	67°C	140°F	78°C
1846	6977	1230	4651	923	3488	738	2791	615	2326	527	1993

Boilers & Water Heaters not available for sale in Canada due to NRCan regulations.

REP FIRM SUBMITTED BY	LC	D 750
JOB NAME ARCHITECT		ategory III Appliance ion Manual for venting information)
ENGINEER CONTRACTOR DATE	RELIABLE. BOLD. INNOVATIVE.	A Division of Mestek, Inc. Westfield, MA 01085 (413) 564-5515

<sup>\*\*</sup> For incoming gas pressures lower than 7"WC natural or 11"WC propane, consult factory.