

SPECTRUM 350

Category I Appliance

Must be vented into a negative pressure vent system.

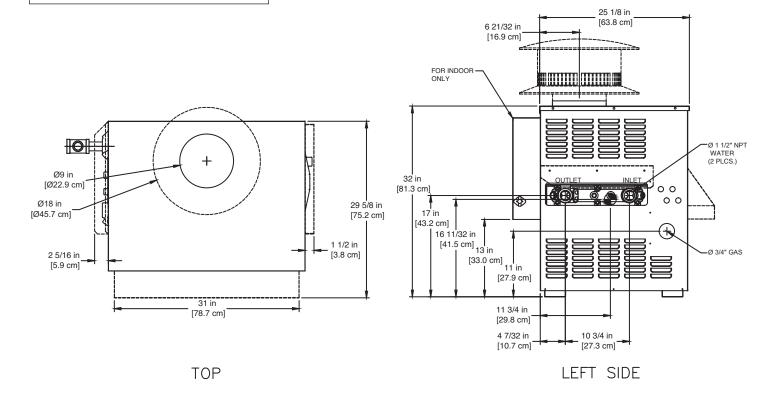

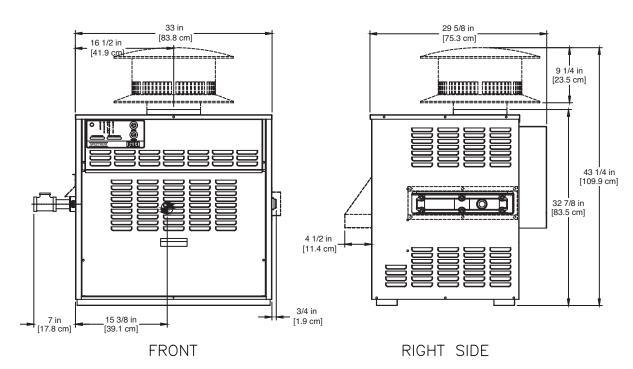

NOTE: FOR OUTDOOR ONLY

RSUB-6-C

- Notes:

 1. Dimensions are approximate and should not be used to "rough-in" equipment.

 2. Dimensions are subject to change without notice.

BOILER CERTIFIED RATINGS & CAPACITIES

Fuel Type	Natural/Propane Gas	Boiler FLA	1*
Input BTU/hr.	350,000 / 103 kW	Min. Gas Pressure Required	5" WC**
Output BTU/hr.	285,600 / 84 kW	Max. Gas Pressure Allowed	14" WC
Electrical Requirements	120VAC / 1 ph / 60 hz	Operating Weight	252 lbs. / 114 kg.

BOILER / WATER HEATER TRIM & CONTROLS

Gas Valve - INT	Honeywell VR8304M 3/4"	Ignition Control (SB On/Off)	Honeywell S9361A2085
Gas Valve	Honeywell VR8304Q 3/4"- 2 Stg.	Ignition Control (SB 2 Stg.)	Honeywell S86IOM
Operating Control (SB/SW)	Honeywell - On/Off	Ignition Control (SW)	Honeywell S86IOM
Gas Valve	Honeywell VR8304Q 3/4"- 2 Stg.	Relief Valve - SW	3/4" x 3/4" set @ 125 psi
High Limit (SB/SW)	Jumo	Relief Valve - SB	3/4" x 3/4" set @ 30 psi
		Flow Switch	TACO

A.S.M.E.

ASME Sect IV Htg Surface	48.5 Sq. Ft. / 4.50 Sq. M.	Design Data	Max. 160 psig & 250°F
Water Volume	Vater Volume 1.4 gal / 5.38 Liters		

^{*} Add circulator amps.

BOILER TEMPERATURE RISE / PRESSURE DROP

	30°F / 16.7°C				20°F / 11.1°C			20°F / 11.1°C			10°F / 5.5°C				
	re Drop	Pressui	Rate	Flow	re Drop	Pressu	Rate	Flow	re Drop	Pressu	Rate	Flow			
	kPa	Ft	L/s	GPM	kPa	Ft	L/s	GPM	kPa	Ft	L/s	GPM			
2 Pass	0.5	0.20	1.2	19.0	1.0	0.33	1.8	28.6	3.5	1.20	3.6	57.1			
4 Pass	3.3	1.10	1.2	19.0	7.0	2.39	1.8	28.6	-	-	-	-			

WATER HEATER HOURLY RECOVERY CAPACITY (GPH & LPH)

40°F	22°C	60°F	33°C	80°F	44°C	100°F	56°C	120°F	67°C	140°F	78°C
840	3176	560	2118	420	1588	336	1271	280	1059	240	908

REP FIRM	
SUBMITTED BY	
JOB NAME	
ARCHITECT	
ENGINEER	
CONTRACTOR	
DATE	

SPECTRUM 350

Category I Appliance

Must be vented into a negative pressure vent system.



A Division of Mestek, Inc. Westfield, MA 01085 (413) 568-9571

^{**} For incoming gas pressures lower than 5" WC natural or 11" WC propane, consult factory.