


PANEL RADIATOR

Standard Accessories Submittal

PRA-3

PERFORATED GRILLE OPTIONAL ACCESSORY

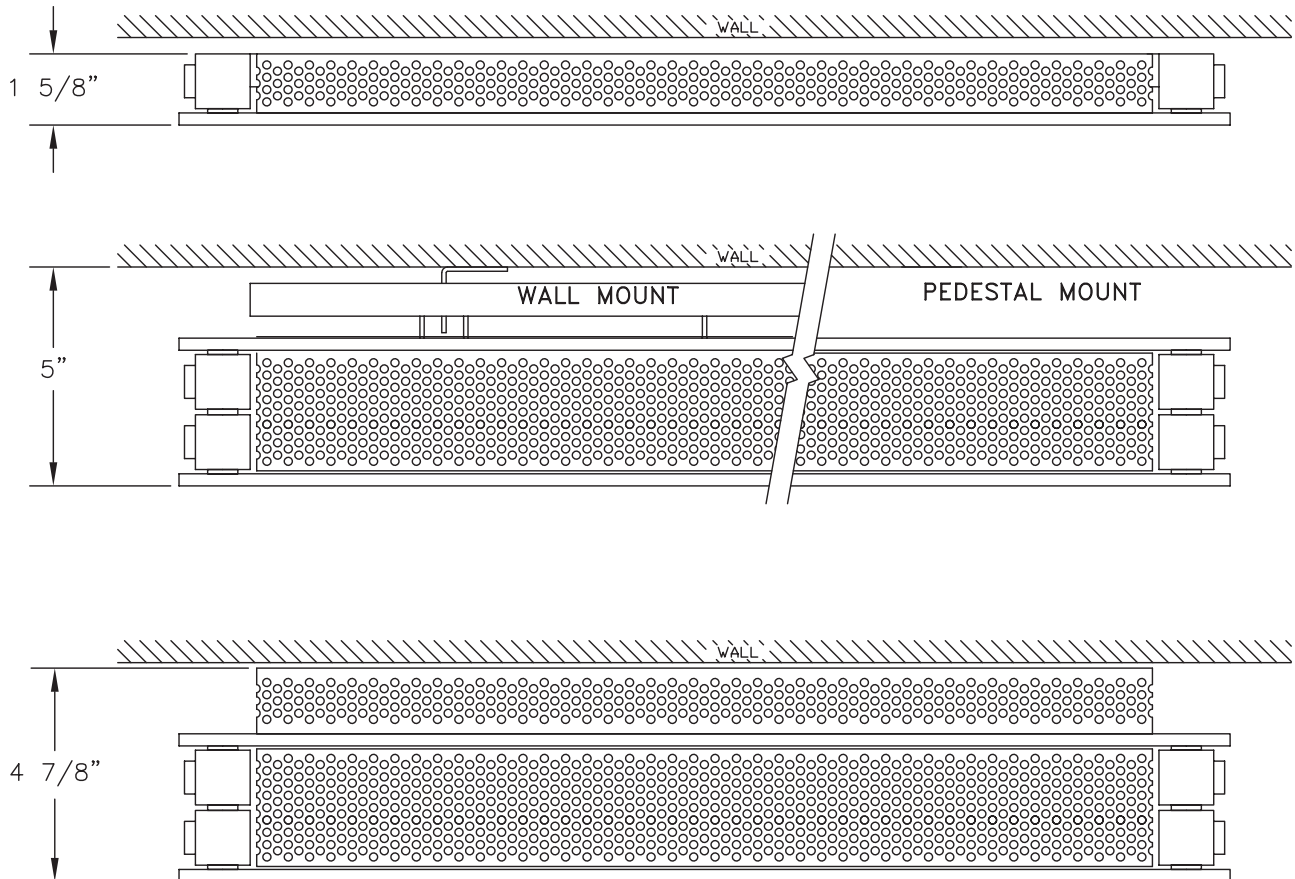

THE 16GA GRILLE WITH 3/16" DIAMETER HOLES ON 1/4" STAGGERED CENTERLINES PROVIDES A PENCIL PROOF FLAT TOP TO ANY STANDARD PANEL. THIS ALLOWS FOR A MORE CONTINUOUS LOOK AND PREVENTS UNWANTED BUILD UP BETWEEN THE FINS. THE GRILLE IS PAINTED AND FINISHED WITH POLYESTER EPOXY POWDER TO MATCH THE RADIATOR.

CAT-75579B



STERLING®

COMMERCIAL HYDRONIC PRODUCTS

260 North Elm St., Westfield, MA 01085

(413) 564-5535

www.sterlingheat.com

PROJECT: _____ DATE: _____

LOCATION: _____


ARCHITECT: _____

ENGINEER: _____




CONTRACTOR: _____

PO NUMBER: _____



FULL TRIM ACCESSORIES

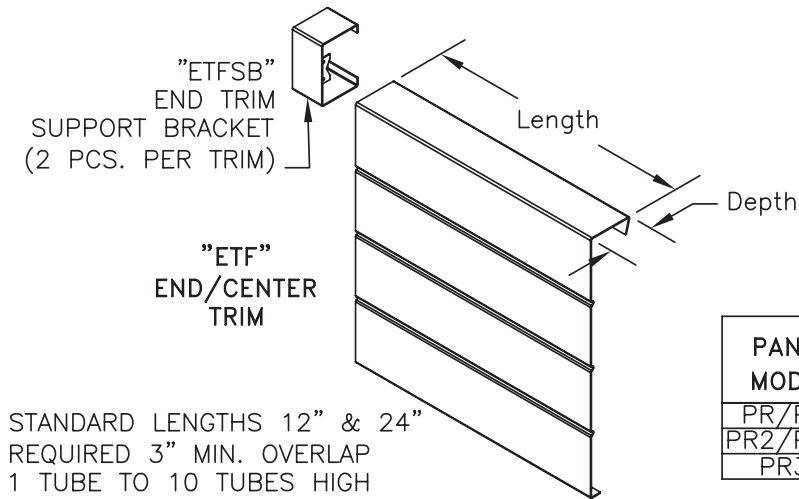


PANEL MODEL	DEPTH	DEPTH TO WALL	LENGTH	
			"ETF" "ELF", "ERF"	"IC" "OC" &
PR/PRF	1 5/8"	2"	12"	6"x6"
PR2/PR2F	3 3/8"	5"	& 24"	& 12"x12"
PR3F	4 7/8"	5"		

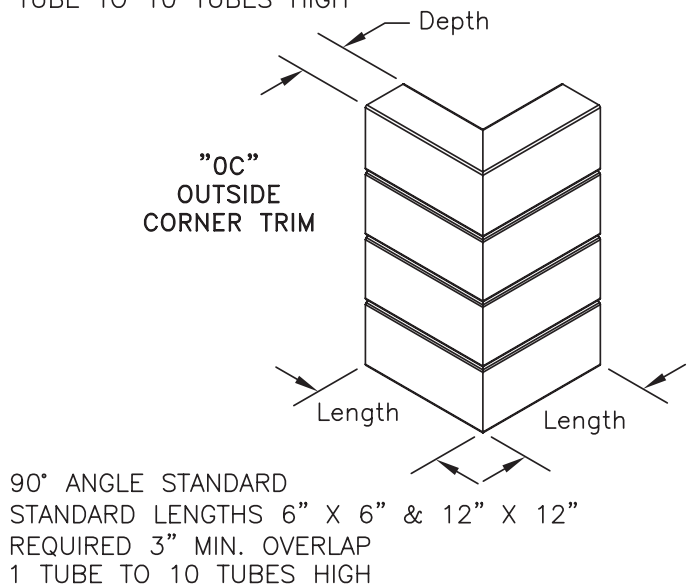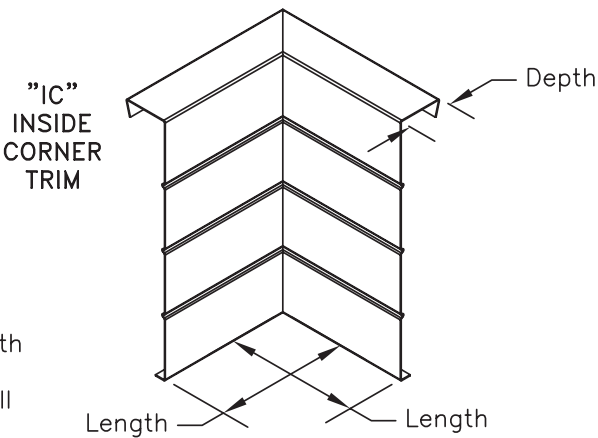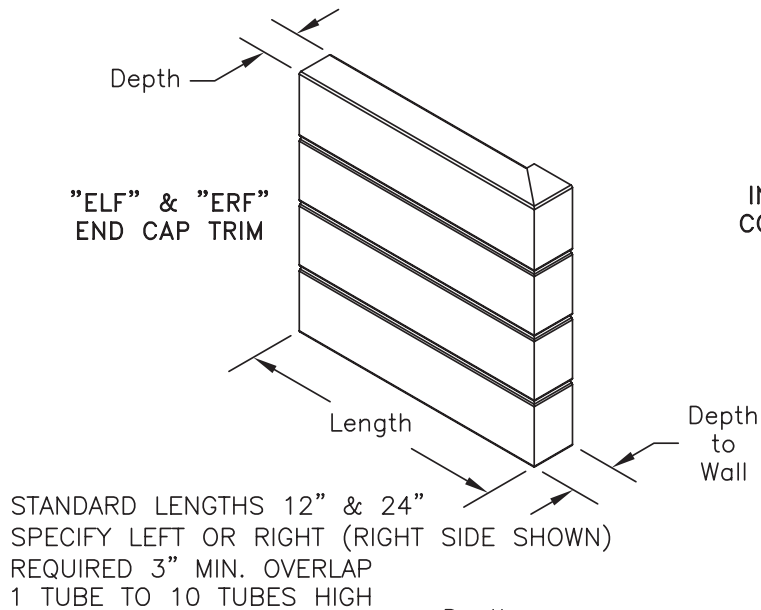


FULL SADDLE TRIM ACCESSORIES

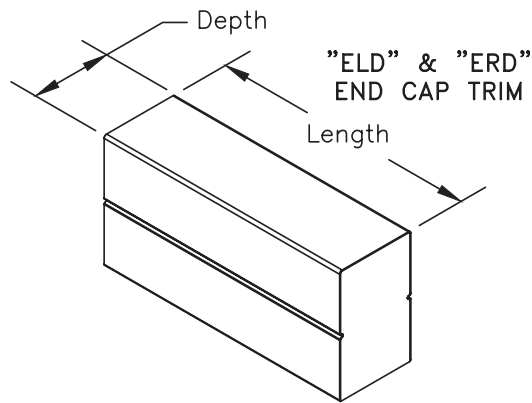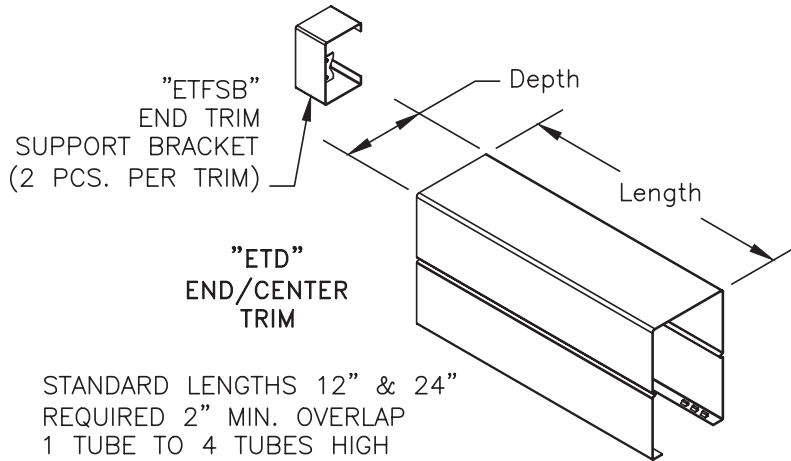

STANDARD LENGTHS 12" & 24"
SPECIFY LEFT OR RIGHT (RIGHT SIDE SHOWN)
REQUIRED 2" MIN. OVERLAP
1 TUBE TO 4 TUBES HIGH

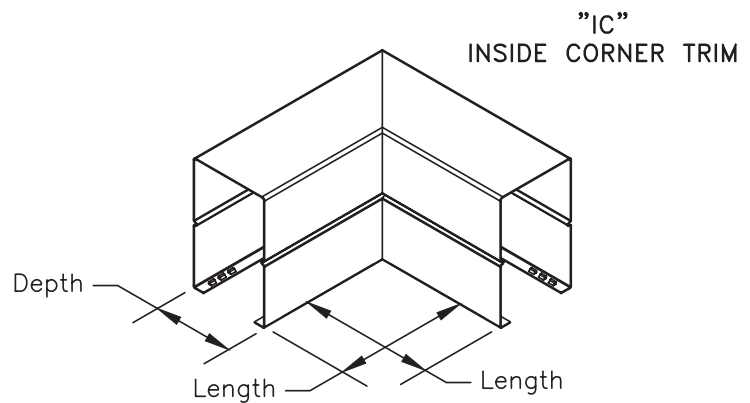

90° ANGLE STANDARD
STANDARD LENGTHS 6" X 6" & 12" X 12"
REQUIRED 2" MIN. OVERLAP
1 TUBE TO 4 TUBES HIGH

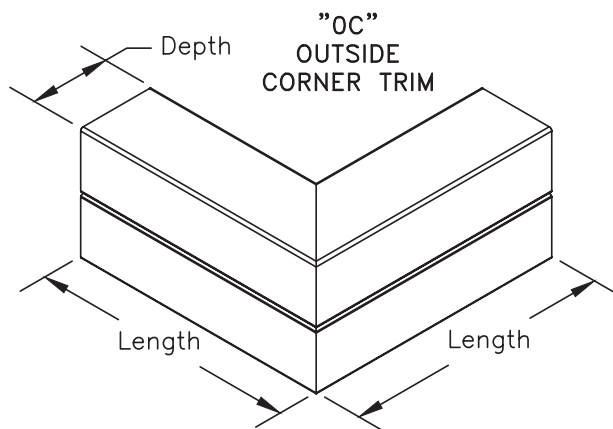

90° ANGLE STANDARD
STANDARD LENGTHS 6" X 6" & 12" X 12"
REQUIRED 2" MIN. OVERLAP
1 TUBE TO 4 TUBES HIGH


PANEL MODEL	DEPTH	LENGTH	
		"ETD", "ELD", "ERD"	"IC" & "OC"
PR2/PR2F	3 3/8"	12" & 24"	6" x 6"
PR3F	4 7/8"		& 12" x 12"

GENERAL NOTES:

- 1) ONLY AVAILABLE UP TO 4 TUBES HIGH
- 2) STANDARD APPLICATION IS PEDESTAL MOUNTED PANEL RADIATORS

CAT-75594D

VERTICAL PIPE TRIM

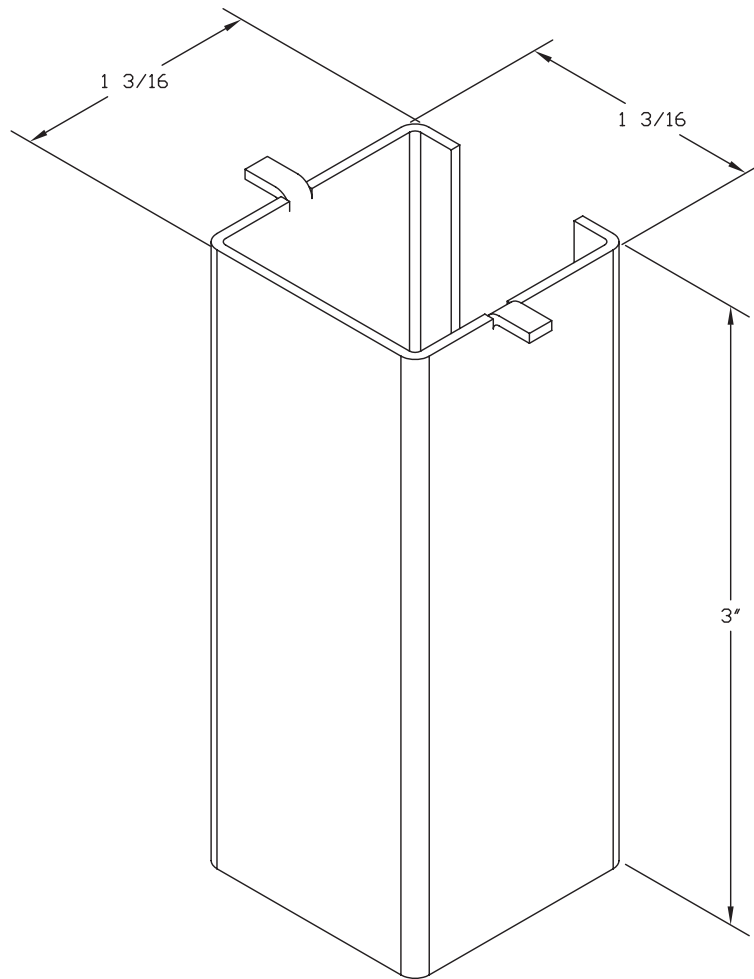

"PRVPT"
VERTICAL
PIPE TRIM

STANDARD SIZES:
HEIGHT 3" OR 10" AVAILABLE

CAT-76578