

LC-210



LC-210 LIGHT COMMERCIAL
SLOPE-TOP ENCLOSURES
FOR HYDRONIC HEATING



Vulcan
RADIATOR

LC-210 LIGHT COMMERCIAL SLOPE-TOP ENCLOSURES

The Vulcan LC-210 offers an outstanding value in a light commercial hydronic heating enclosure. Capable of utilizing two tiers of element, the LC-210 offers high output in a low profile slope-top enclosure. The 3 1/4 inch depth and slope top make this attractive enclosure a real space-saver. LC-210 elements are available in both copper/aluminum and steel in a wide variety of sizes and outputs.

For ease of installation, the LC-210 features a self locating bracket with pre-punched mounting holes. The stamped pencil-proof louvers prevent trash accumulation on the element while meeting the specifications of demanding engineers and architects. And, because the LC-210 does not require a full backplate, it can be mounted off of the finished floor.


All Vulcan LC-210 enclosures feature a durable electrostatic-baked powder finish and are available in Vulcan's full selection of colors. Constructed of 18-gauge cold rolled steel (16-gauge optional), this durable enclosure is ideal for dormitories, military housing, nursing homes, offices and reception areas.

All of Vulcan's commercial hydronic products are made from recycled materials.

FEATURES

- Two Tier Capacity
- Heavy 18-Gauge Enclosure (16-Gauge Optional)
- Narrow 3 1/4 Inch Depth
- Low 10 1/4 Inch Height
- Stamped Pencil-Proof Louvers
- Broad Choice of Elements
- Baked Powder Finish
- Self-Locating Brackets

GENERAL LAYOUT

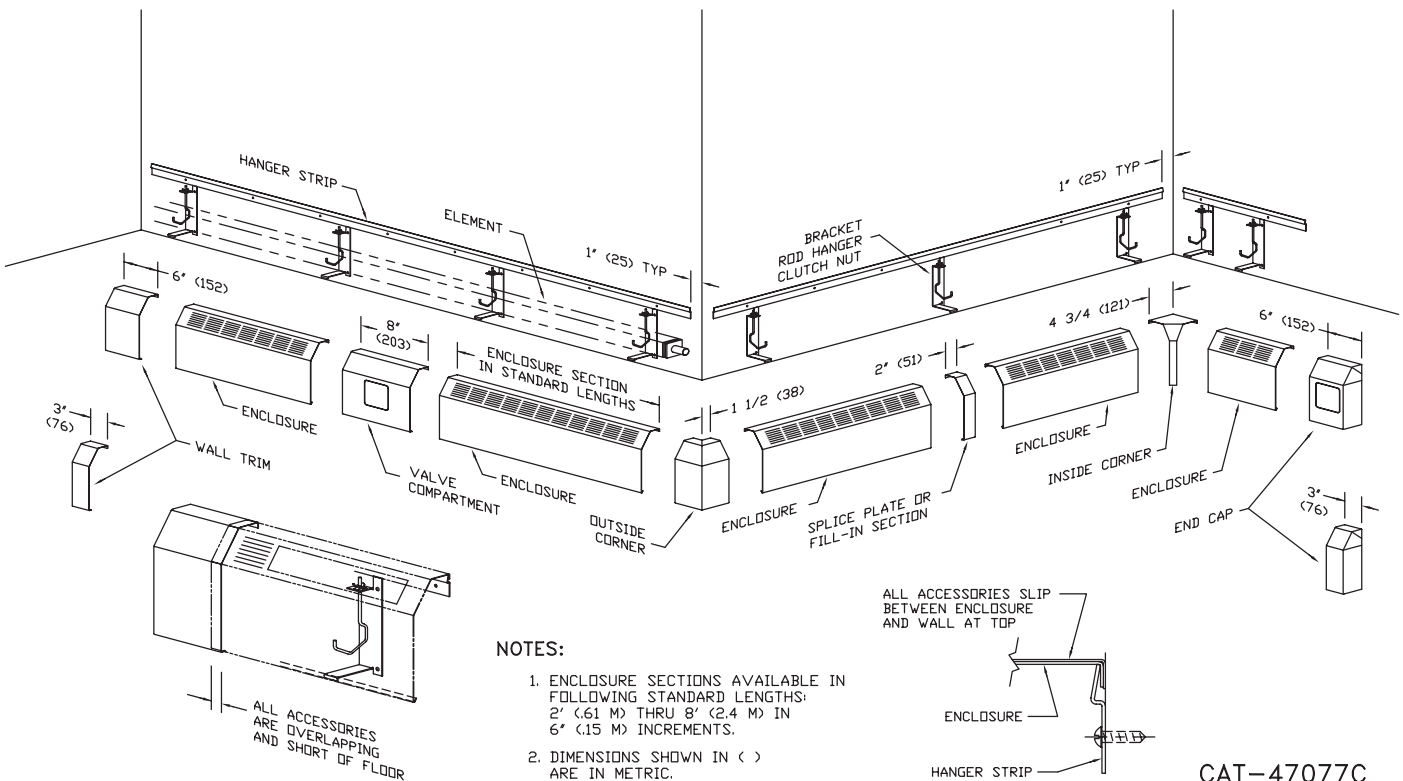

RATINGS LC-210

STYLE Light Commercial "LC-210"

COPPER/ALUMINUM ELEMENT RATINGS
ALL RATINGS ARE BASED ON 3 FPS VELOCITY, 65° EAT

| TUBE SIZE | CATALOG DESIGNATION | FIN SIZE HEIGHT X WIDTH | FINS PER FT. | FIN THICKNESS IN INCHES | TIERS AND CENTERS IN INCHES | MTG. HEIGHT IN INCHES | STEAM 215°F FACTOR | HOT WATER (AVG.) | | | | | | | | |
|-----------|---------------------|-------------------------|--------------|-------------------------|-----------------------------|-----------------------|--------------------|---|------|------|------|------|------|------|------|------|
| | | | | | | | | 200° | 190° | 180° | 170° | 160° | 150° | 140° | 130° | 120° |
| | | | | | | | | CORRECTION FACTORS FOR AVERAGE WATER TEMPERATURES | | | | | | | | |
| | | | | | | | 1.00 | 0.86 | 0.78 | 0.69 | 0.61 | 0.53 | 0.45 | .40 | .33 | .26 |
| 3/4" | VR02 | 2-1/2" x 2-3/4" | 60 | .010 | 1 | 14-1/4 | 1140 | 980 | 890 | 790 | 700 | 600 | 510 | 460 | 380 | 300 |
| | | | | | 2-3-1/2 CL | 14-1/4 | 1560 | 1340 | 1220 | 1080 | 950 | 830 | 700 | 620 | 510 | 410 |
| 1" | VR03 | 2-1/2" x 2-3/4" | 55 | .011 | 1 | 14-1/4 | 1090 | 940 | 850 | 750 | 660 | 580 | 490 | 440 | 360 | 280 |
| | | | | | 2-3-1/2 CL | 14-1/4 | 1600 | 1380 | 1250 | 1100 | 980 | 850 | 720 | 640 | 530 | 420 |
| 3/4" | VR04 | 3-3/4" x 2-3/4" | 50 | .014 | 1 | 14-1/4 | 1170 | 1010 | 910 | 810 | 710 | 620 | 530 | 470 | 390 | 300 |
| 1" | VR05 | 3-3/4" x 2-3/4" | 50 | .011 | 1 | 14-1/4 | 1130 | 970 | 880 | 780 | 690 | 600 | 510 | 450 | 370 | 290 |
| 1-1/4" | VR08 | 3-3/4" x 2-3/4" | 50 | .020 | 1 | 14-1/4 | 1150 | 990 | 900 | 790 | 700 | 610 | 520 | 460 | 380 | 300 |
| 1" | VR06 | 5" x 2-3/4" | 40 | .020 | 1 | 14-1/4 | 1200 | 1030 | 940 | 830 | 730 | 640 | 540 | 480 | 400 | 310 |
| 1" | VR07 | 5" x 2-3/4" | 50 | .020 | 1 | 14-1/4 | 1210 | 1040 | 940 | 830 | 740 | 640 | 540 | 480 | 400 | 310 |
| 1-1/4" | VR09 | 5" x 2-3/4" | 40 | .020 | 1 | 14-1/4 | 1150 | 990 | 900 | 790 | 700 | 610 | 520 | 460 | 380 | 300 |
| 1-1/4" | VR10 | 5" x 2-3/4" | 50 | .020 | 1 | 14-1/4 | 1230 | 1060 | 960 | 850 | 750 | 650 | 550 | 490 | 410 | 320 |

STYLE Light Commercial "LC-210"

STEEL ELEMENT RATINGS
ALL RATINGS ARE BASED ON 3 FPS VELOCITY, 65° EAT

| TUBE SIZE | CATALOG DESIGNATION | FIN SIZE HEIGHT X WIDTH | FINS PER FT. | FIN THICKNESS IN INCHES | TIERS AND CENTERS IN INCHES | MTG. HEIGHT IN INCHES | STEAM 215°F FACTOR | HOT WATER (AVG.) | | | | | | | | |
|-----------|---------------------|-------------------------|--------------|-------------------------|-----------------------------|-----------------------|--------------------|---|------|------|------|------|------|------|------|------|
| | | | | | | | | 200° | 190° | 180° | 170° | 160° | 150° | 140° | 130° | 120° |
| | | | | | | | | CORRECTION FACTORS FOR AVERAGE WATER TEMPERATURES | | | | | | | | |
| | | | | | | | 1.00 | 0.86 | 0.78 | 0.69 | 0.61 | 0.53 | 0.45 | .40 | .33 | .26 |
| 1" | VR11 | 3-3/4" x 2-3/4" | 40 | .024 | 1 | 14-1/4 | 910 | 780 | 710 | 630 | 560 | 480 | 410 | 360 | 300 | 240 |
| 1" | VR15 | 5" x 2-3/4" | 50 | .024 | 1 | 14-1/4 | 1100 | 950 | 860 | 760 | 670 | 580 | 500 | 440 | 360 | 290 |
| 1-1/4" | VR16 | 5" x 2-3/4" | 50 | .024 | 1 | 14-1/4 | 1150 | 990 | 900 | 790 | 700 | 610 | 520 | 460 | 380 | 300 |

The ratings of the charts above include factors shown in the chart below for the recommended mounting height. Two tier ratings are based on 3 1/2" between elements. Ratings are in BTU per hour per lineal foot of active length. "Active length" is the catalog ordering length less 4". The water ratings applicable to water flow rates of three or more feet per second, have been determined by applying factors shown to the Steam Ratings. Elements unpainted. If the unit is to be installed at a height different than the recommended mounting height, the rating must be adjusted as follows:


RATING MULTIPLIED BY: $\frac{\text{FACTOR FROM TABLE B FOR THE ACTUAL MOUNTING HEIGHT}}{\text{FACTOR FROM TABLE B FOR THE RECOMMENDED MOUNTING HEIGHT}}$

Table B

| MOUNTING HEIGHT IN IN. | 18 or less | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 32 | 34 | 36 | 38 or more |
|------------------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------------|
| FACTOR 3 1/4" OFFSET | 1.100 | 1.100 | 1.098 | 1.091 | 1.085 | 1.078 | 1.071 | 1.065 | 1.058 | 1.051 | 1.045 | 1.038 | 1.031 | 1.019 | 1.012 | 1.006 | 1.000 |

| CAT. NO. | A MIN. | A MAX. |
|----------|-----------------|-----------------|
| VR02 | 5 15/16 (150.8) | 8 7/16 (214.3) |
| VR03 | 6 1/16 (154) | 8 5/8 (219.1) |
| VR04 | 6 9/16 (166.7) | 8 15/16 (227) |
| VR05 | 6 9/16 (166.7) | 9 1/8 (231.8) |
| VR06 | 7 1/8 (181) | 8 11/16 (220.7) |
| VR08 | 6 11/16 (169.9) | 9 1/4 (235) |
| VR09 | 7 3/16 (182.6) | 8 11/16 (220.7) |
| VR10 | 7 3/16 (182.6) | 8 11/16 (220.7) |
| VR11 | 6 11/16 (169.9) | 9 3/16 (233.4) |
| VR15 | 7 3/16 (182.6) | 8 11/16 (220.7) |
| VR16 | 7 3/16 (182.6) | 8 11/16 (220.7) |

| CAT. NO. | C | D |
|----------|---------------|------------|
| VR02 | 5 25/32 (147) | 3 1/2 (89) |
| VR03 | 5 25/32 (147) | 3 1/2 (89) |
| VR04 | 6 7/32 (156) | N/A |
| VR05 | 6 7/32 (156) | N/A |
| VR06 | 7 1/32 (176) | N/A |
| VR07 | 7 1/32 (176) | N/A |
| VR08 | 6 7/32 (156) | N/A |
| VR09 | 7 1/32 (176) | N/A |
| VR10 | 7 1/32 (176) | N/A |
| VR11 | 6 7/32 (156) | N/A |
| VR15 | 7 1/32 (176) | N/A |
| VR16 | 7 1/32 (176) | N/A |

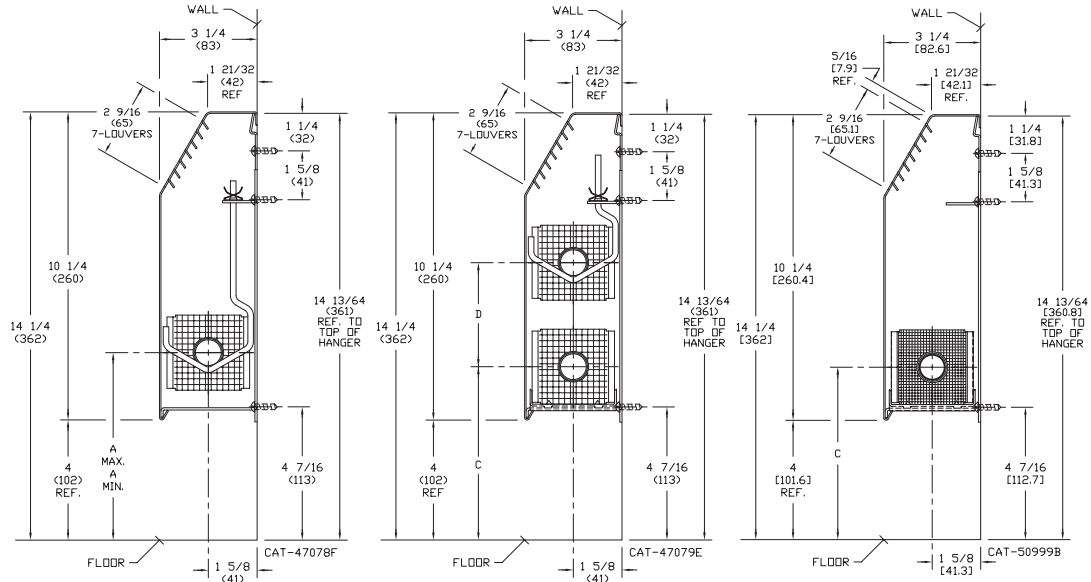

Dimensions are in inches. Dimensions in parentheses are in millimeters

SPECIFICATIONS FOR THE LC-210

Furnish and install where shown on all plans/drawings, Vulcan LC-210 Finned Tube Enclosure and Element as described or approved equal of both quality and BTU capacity.

The finned tube enclosure, as called out LC-210, will be manufactured from 18-gauge (16-gauge optional) bonderized C.R.S. with a baked powder prime finish. The air discharge louvers are to be die formed stamped into the steel enclosure. The louver openings are to be "Pencil Proof". All lateral bends are to be formed on bottoming dies to ensure continuity of all adjoining enclosures and accessories. The enclosure lengths are to be provided in 6 inch increments from 2 feet through 8 feet long. The enclosure is to fully engage in a continuous full length mounting strip mounted to the wall. A two (2) inch joiner strip is to be used where two pieces of enclosure are adjoining each other in a run.

All accessories will be die formed 18 gauge cold rolled steel and finished with the baked prime finish described above. The accessories will overlap the installed enclosure and are to provide adjustment for make-up in the installed runs of enclosure.

The brackets are to be of a one piece, die formed construction. The material is to be 14-gauge C.R.S. with a baked prime finish. The bracket is to be self locating for vertical positioning at installation. The bottom horizontal leg is to snap into bottom bend of the enclosure and is to support the element when slide shoes are used. The top horizontal leg is to support the adjustable element hanger. Adjustable rod hangers are to be supplied when specified. These will be used in conjunction with the various elements that do not incorporate a nylon slide. They will also be used when the installation requires pitch adjustment for steam applications.

The mounting strip is to be supplied in eight (8) foot lengths. It will be die formed heavy gauge, galvanized material.

All elements are to be of the mechanically expanded type to ensure that proper fin to tube bonding is maximized. Copper/Aluminum elements are to be provided with one end mechanically swaged (flared) for proper assembly. Steel/Steel element are to be provided with both ends threaded to accept all domestic NPT fittings or cut square and chamfered for field welding.

In the interest of product improvement, we reserve the right to make changes without notice.

ACCESSORIES



6" (152 mm) End Cap
with Access Door



8" (203 mm) Valve
Compartment



135° Outside
Corner



Inside Corner
90° & 135°




6" (152 mm)
End Cap



3" (76 mm)
End Cap



3" (76 mm) or
6" (152 mm)
Wall Sleeve



14" (356 mm)
Fill-In Section



Outside Corner



2" (51 mm)
Splice Plate



260 North Elm Street • Westfield, MA 01085
(413) 568-9571
www.vulcanrad.com