

LINOVECTOR II

LV3-E / LV4-E
Copper/Aluminum and
Steel Element Ratings

Submittal

Specification

LV3 Slip Jointed Enclosure

ENCLOSURE:

STYLE: Flat Top, Top Outlet
OUTLET: Stamped Louvers
Pencil Proof

LENGTHS: 2'0" thru 8'0" in 6" Increments

MAT'L: 18 Ga. CRS (Std)
 16 Ga. CRS (Opt'l)
 14 Ga. CRS (Opt'l)
 18 Ga. Stainless Steel (Opt'l)
 16 Ga. Stainless Steel (Opt'l)
 14 Ga. Stainless Steel (Opt'l)
 16 Ga. Aluminum (Opt'l)
 14 Ga. Aluminum (Opt'l)
 12 Ga. Aluminum (Opt'l)

HEIGHT: 5 3/4" (LV3 only)
 6 1/8" (LV4 only)
 11 3/4" (LV3 only)
 12 1/8" (LV4 only)

FINISH: Baked Powder (Std)
 Baked Metallic (Opt'l)

ELEMENT:

TYPE: Cu/AL (Mechanically Expanded)
LENGTHS: 2'0" thru 12'6" in 1" Increments
for 1" & 1-1/4" Cu.
2'0" thru 8'0" in 1" Increments
for 3/4" Cu.

One End Flared (Std)

TYPE: IPS Steel (Mechanically Expanded)

LENGTHS: 2'0" thru 12'6" in 1" Increments
 NPT Thread both Ends (Std)
 Beveled Ends for Field Weld (Opt'l)

See Catalog for Working Pressures

LV4 Slip Jointed Enclosure

BACKPLATE:

TYPE: Partial B/P
LENGTHS: 8'0" Only
MAT'L: 20 Ga. Prepainted (Std)
 18 Ga. Galvannealed (Opt'l)

AIRSEAL:

1/8" x 3/8" Closed Cell (Opt'l)

BRACKETS:

Water Brkt w/B.B.

DAMPER: Not Available


Not recommended for steam applications.
Consult factory

ACCESSORIES:

LV Overlapping Type
All accessories return to the wall at the bottom
and have pre-punched holes for fastening to
the wall.


LV3-E5 11

| ELEMENT TUBE SIZE | FIN SIZE HEIGHT x WIDTH | CRADLE NUMBER | A |
|-------------------|-------------------------|---------------|----------|
| 3/4 COPPER | 3 1/4 x 3 1/4 | 2 | 7" |
| 1" COPPER | 3 1/4 x 3 1/4 | 2 | 7 3/16" |
| 1 1/4 COPPER | 3 1/4 x 3 1/4 | 1 | 6 5/8" |
| 1" STEEL | 3 1/4 x 3 1/4 | 2 | 7 5/16" |
| 1 1/4 STEEL | 3 1/4 x 3 1/4 | 1 | 6 13/16" |

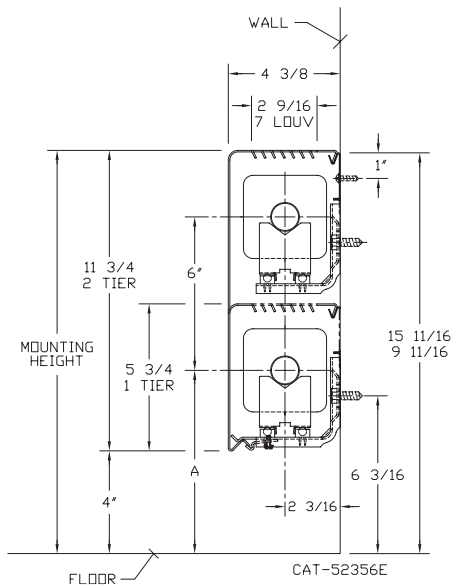

LV4-E6 12

| ELEMENT TUBE SIZE | FIN SIZE HEIGHT x WIDTH | CRADLE NUMBER | A |
|-------------------|-------------------------|---------------|---------|
| 3/4 COPPER | 3 5/8 x 4 1/4 | 2 | 7" |
| 3/4 COPPER | 4 1/4 x 4 1/4 | 3A | 7 3/8" |
| 1" COPPER | 3 5/8 x 4 1/4 | 2 | 7 3/16" |
| 1" COPPER | 4 1/4 x 4 1/4 | 2 | 7 3/16" |
| 1 1/4 COPPER | 3 5/8 x 4 1/4 | 2 | 7 5/16" |
| 1 1/4 COPPER | 4 1/4 x 4 1/4 | 2 | 7 5/16" |
| 1" STEEL | 4 1/4 x 4 1/4 | 2 | 7 5/16" |
| 1 1/4 STEEL | 4 1/4 x 4 1/4 | 2 | 7 1/2" |
| 2" STEEL | 4 1/4 x 4 1/4 | 1 | 7 1/4" |

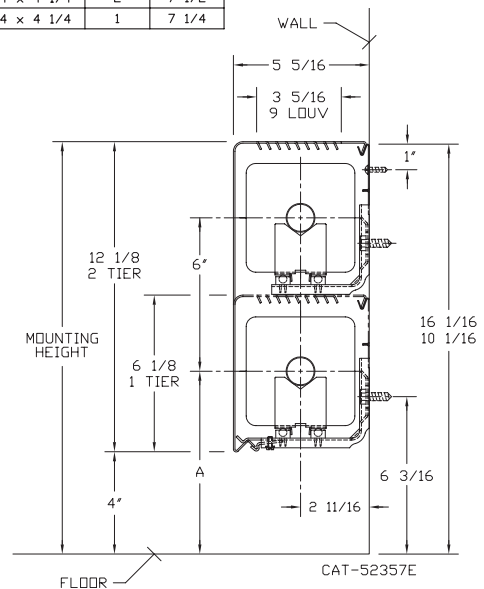

Vulcan

RADIATOR

260 North Elm St., Westfield, MA 01085
(413) 568-9571 Fax: (413) 564-5661
www.vulcanrad.com

PROJECT: _____ DATE: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

PO NUMBER: _____

STYLE "LV3-E / LV4-E" LINOVECTOR II

COPPER/ALUMINUM ELEMENTS

ALL RATINGS ARE IN BTU/HR/LIN FT AND BASED ON 3 FPS VELOCITY, 65° EAT

| TUBE SIZE | CATALOG DESIGNATION | FIN SIZE HEIGHT X WIDTH | FINS PER FT. | FIN THICKNESS IN INCHES | ENCL HEIGHT IN INCHES | TIERS AND CENTERS IN INCHES | MOUNTING HEIGHT IN INCHES | STEAM 215° FACTOR | HOT WATER (AVG.) | | | | | | | | |
|-----------|---------------------|-------------------------|--------------|-------------------------|-----------------------|-----------------------------|---------------------------|-------------------|---------------------------------------------------|--------------|--------------|-------------|-------------|------------|------------|------------|------------|
| | | | | | | | | | 200° | 190° | 180° | 170° | 160° | 150° | 140° | 130° | 120° |
| | | | | | | | | | CORRECTION FACTORS FOR AVERAGE WATER TEMPERATURES | | | | | | | | |
| | | | | | | | | 1.00 | 0.86 | 0.78 | 0.69 | 0.61 | 0.53 | 0.45 | .40 | .33 | .26 |
| 3/4" | VC3/4-33 | 3-1/4" SQ. | 32 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 840 1380 | 720 1190 | 660 1080 | 580 950 | 510 840 | 450 730 | 380 620 | 340 550 | 280 460 | 220 360 |
| 3/4" | VC3/4-34 | 3-1/4" SQ. | 40 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 970 1490 | 830 1280 | 760 1160 | 670 1030 | 590 910 | 510 790 | 440 670 | 390 600 | 320 490 | 250 390 |
| 3/4" | VC3/4-35 | 3-1/4" SQ. | 50 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 980 1440 | 840 1240 | 760 1120 | 680 990 | 600 880 | 520 760 | 440 650 | 390 580 | 320 480 | 250 370 |
| 1" | VC33 | 3-1/4" SQ. | 32 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 820 1360 | 710 1170 | 640 1060 | 570 940 | 500 830 | 430 720 | 370 610 | 330 540 | 270 450 | 210 350 |
| 1" | VC34 | 3-1/4" SQ. | 40 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 950 1470 | 820 1260 | 740 1150 | 660 1010 | 580 900 | 500 780 | 430 660 | 380 590 | 310 490 | 250 380 |
| 1" | VC35 | 3-1/4" SQ. | 50 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 960 1470 | 830 1260 | 750 1150 | 660 1010 | 590 900 | 510 780 | 430 660 | 380 590 | 320 490 | 250 380 |
| 1-1/4" | VC133 | 3-1/4" SQ. | 32 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 780 1320 | 670 1140 | 610 1030 | 540 910 | 480 810 | 410 700 | 350 590 | 310 530 | 260 440 | 200 340 |
| 1-1/4" | VC134 | 3-1/4" SQ. | 40 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 910 1400 | 780 1200 | 710 1090 | 630 970 | 560 850 | 480 740 | 410 630 | 360 560 | 300 460 | 240 360 |
| 1-1/4" | VC135 | 3-1/4" SQ. | 50 | .020 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 920 1380 | 790 1190 | 720 1080 | 630 950 | 560 840 | 490 730 | 410 620 | 370 550 | 300 460 | 240 360 |
| 3/4" | VC3/4-433 | 3-5/8" x 4-1/4" | 32 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 865 1340 | 740 1150 | 670 1050 | 600 920 | 530 820 | 460 710 | 390 600 | 350 540 | 290 440 | 220 350 |
| 3/4" | VC3/4-434 | 3-5/8" x 4-1/4" | 40 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1190 1900 | 1020 1630 | 930 1480 | 820 1310 | 730 1160 | 630 1010 | 540 860 | 480 760 | 390 630 | 310 490 |
| 3/4" | VC3/4-435 | 3-5/8" x 4-1/4" | 50 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1270 2060 | 1090 1770 | 990 1610 | 880 1420 | 770 1260 | 670 1090 | 570 930 | 510 820 | 420 680 | 330 540 |
| 1" | VC433 | 3-5/8" x 4-1/4" | 32 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1110 1690 | 950 1450 | 870 1320 | 770 1170 | 680 1030 | 590 900 | 500 760 | 440 680 | 370 560 | 290 440 |
| 1" | VC434 | 3-5/8" x 4-1/4" | 40 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1230 1960 | 1060 1690 | 960 1530 | 850 1350 | 750 1200 | 650 1040 | 550 880 | 490 780 | 410 650 | 320 510 |
| 1" | VC435 | 3-5/8" x 4-1/4" | 50 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1320 1930 | 1140 1660 | 1030 1510 | 910 1330 | 810 1180 | 700 1020 | 590 870 | 530 770 | 440 640 | 340 500 |
| 1-1/4" | VC1433 | 3-5/8" x 4-1/4" | 32 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1090 1660 | 940 1430 | 850 1290 | 750 1150 | 660 1010 | 580 880 | 490 750 | 440 660 | 360 550 | 280 430 |
| 1-1/4" | VC1434 | 3-5/8" x 4-1/4" | 40 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1210 1920 | 1040 1650 | 940 1500 | 830 1320 | 740 1170 | 640 1020 | 540 860 | 480 770 | 400 630 | 310 500 |
| 1-1/4" | VC1435 | 3-5/8" x 4-1/4" | 50 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1300 1890 | 1120 1630 | 1010 1470 | 900 1300 | 790 1150 | 690 1000 | 590 850 | 520 760 | 430 620 | 340 490 |
| 3/4" | VC3/4-43 | 4-1/4" SQ. | 32 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1200 1900 | 1030 1630 | 940 1480 | 830 1310 | 730 1160 | 640 1010 | 540 860 | 480 760 | 400 630 | 310 490 |
| 3/4" | VC3/4-44 | 4-1/4" SQ. | 40 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1600 2200 | 1380 1890 | 1250 1720 | 1100 1520 | 980 1340 | 850 1170 | 720 990 | 640 880 | 530 730 | 420 570 |
| 3/4" | VC3/4-45 | 4-1/4" SQ. | 50 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1330 1880 | 1140 1620 | 1040 1470 | 920 1300 | 810 1150 | 700 1000 | 600 850 | 530 750 | 440 620 | 350 490 |
| 1" | VC43 | 4-1/4" SQ. | 32 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1220 1920 | 1050 1650 | 950 1500 | 840 1320 | 740 1170 | 650 1020 | 550 860 | 490 770 | 400 630 | 320 500 |
| 1" | VC44 | 4-1/4" SQ. | 40 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1480 2010 | 1270 1730 | 1150 1570 | 1020 1390 | 900 1230 | 780 1070 | 670 900 | 590 800 | 490 660 | 380 520 |
| 1" | VC45 | 4-1/4" SQ. | 50 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1370 1930 | 1180 1660 | 1070 1510 | 950 1330 | 840 1180 | 730 1020 | 620 870 | 550 770 | 450 640 | 360 500 |
| 1-1/4" | VC143 | 4-1/4" SQ. | 32 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1200 1880 | 1030 1620 | 940 1470 | 830 1300 | 730 1150 | 640 1000 | 540 850 | 480 750 | 400 620 | 310 490 |
| 1-1/4" | VC144 | 4-1/4" SQ. | 40 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1330 1970 | 1140 1690 | 1040 1540 | 920 1360 | 810 1200 | 700 1040 | 600 890 | 530 790 | 440 650 | 350 510 |
| 1-1/4" | VC145 | 4-1/4" SQ. | 50 | .020 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1350 1890 | 1160 1630 | 1050 1470 | 930 1300 | 820 1150 | 720 1000 | 610 850 | 540 760 | 450 620 | 350 490 |

Note: Copper tube furnished flared one end standard.

STYLE "LV3-E / LV4-E" LINOVECTOR II


STEEL ELEMENTS

ALL RATINGS ARE IN BTU/HR/LIN FT AND BASED ON 3 FPS VELOCITY, 65° EAT

| TUBE SIZE | CATALOG DESIGNATION | FIN SIZE HEIGHT X WIDTH | FINS PER FT. | FIN THICKNESS IN INCHES | ENCL HEIGHT IN INCHES | TIERS AND CENTERS IN INCHES | MOUNTING HEIGHT IN INCHES | STEAM 215° FACTOR | HOT WATER (AVG.) | | | | | | | | | | | | | | | | | | |
|-----------|---------------------|-------------------------|--------------|-------------------------|-----------------------|-----------------------------|---------------------------|-------------------|------------------|--------------|-------------|-------------|-------------|------------|------------|------------|------------|---------------------------------------------------|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | 200° | 190° | 180° | 170° | 160° | 150° | 140° | 130° | 120° | CORRECTION FACTORS FOR AVERAGE WATER TEMPERATURES | | | | | | | | | |
| | | | | | | | | | 1.00 | 0.86 | 0.78 | 0.69 | 0.61 | 0.53 | 0.45 | .40 | .33 | .26 | | | | | | | | | |
| 1" | VS33 | 3-1/4" SQ. | 32 | .032 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 780 1330 | 670 1140 | 610 1040 | 540 920 | 480 810 | 410 700 | 350 600 | 310 530 | 260 440 | 200 350 | | | | | | | | | | |
| 1" | VS34 | 3-1/4" SQ. | 40 | .032 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 860 1475 | 740 1270 | 670 1150 | 590 1020 | 520 900 | 460 780 | 390 660 | 340 590 | 280 490 | 220 380 | | | | | | | | | | |
| 1" | VS35 | 3-1/4" SQ. | 50 | .032 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 910 1550 | 780 1330 | 710 1210 | 630 1070 | 560 950 | 480 820 | 410 700 | 360 620 | 300 510 | 240 400 | | | | | | | | | | |
| 1-1/4" | VS133 | 3-1/4" SQ. | 32 | .032 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 770 1320 | 660 1140 | 600 1030 | 530 910 | 470 810 | 410 700 | 350 590 | 310 530 | 250 440 | 200 340 | | | | | | | | | | |
| 1-1/4" | VS134 | 3-1/4" SQ. | 40 | .032 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 870 1490 | 750 1280 | 680 1160 | 600 1030 | 530 910 | 460 790 | 390 670 | 350 600 | 290 490 | 230 390 | | | | | | | | | | |
| 1-1/4" | VS135 | 3-1/4" SQ. | 50 | .032 | 5 11 | 1 2-6 CL | 9-3/4 15-3/4 | 880 1510 | 760 1300 | 690 1180 | 610 1040 | 540 920 | 470 800 | 400 680 | 350 600 | 290 500 | 230 390 | | | | | | | | | | |
| 1" | VS43 | 4-1/4" SQ. | 32 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1095 1850 | 940 1590 | 850 1440 | 760 1280 | 670 1130 | 580 980 | 490 830 | 440 740 | 360 610 | 280 480 | | | | | | | | | | |
| 1" | VS44 | 4-1/4" SQ. | 40 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1215 1910 | 1040 1640 | 950 1490 | 840 1320 | 740 1170 | 640 1010 | 550 860 | 490 760 | 400 630 | 320 500 | | | | | | | | | | |
| 1" | VS45 | 4-1/4" SQ. | 50 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1300 2150 | 1120 1850 | 1010 1680 | 900 1480 | 790 1310 | 690 1140 | 590 970 | 520 860 | 430 710 | 340 560 | | | | | | | | | | |
| 1-1/4" | VS143 | 4-1/4" SQ. | 32 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1010 1700 | 870 1460 | 790 1330 | 700 1170 | 620 1040 | 540 900 | 450 770 | 400 680 | 330 560 | 260 440 | | | | | | | | | | |
| 1-1/4" | VS144 | 4-1/4" SQ. | 40 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1210 1900 | 1040 1630 | 940 1480 | 830 1310 | 740 1160 | 640 1010 | 540 860 | 480 760 | 400 630 | 310 490 | | | | | | | | | | |
| 1-1/4" | VS145 | 4-1/4" SQ. | 50 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1280 2135 | 1100 1840 | 1000 1670 | 880 1470 | 780 1300 | 680 1130 | 580 960 | 510 850 | 420 700 | 330 560 | | | | | | | | | | |
| 2" | VS242 | 4-1/4" SQ. | 25 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 950 1620 | 820 1390 | 740 1260 | 660 1120 | 580 990 | 500 860 | 430 730 | 380 650 | 310 530 | 250 420 | | | | | | | | | | |
| 2" | VS243 | 4-1/4" SQ. | 32 | .032 | 6 12 | 1 2-6 CL | 10-1/8 16-1/8 | 1130 1770 | 970 1520 | 880 1380 | 780 1220 | 690 1080 | 600 940 | 510 800 | 450 710 | 370 580 | 290 460 | | | | | | | | | | |

- Notes: 1) Steel fins furnished as .032 thick, painted black.
 2) NPT threads furnished on steel elements. Please use domestic fittings for proper installation.
 3) The ends can be provided chamfered for field welded fittings when specified.

STYLE E ACCESSORIES

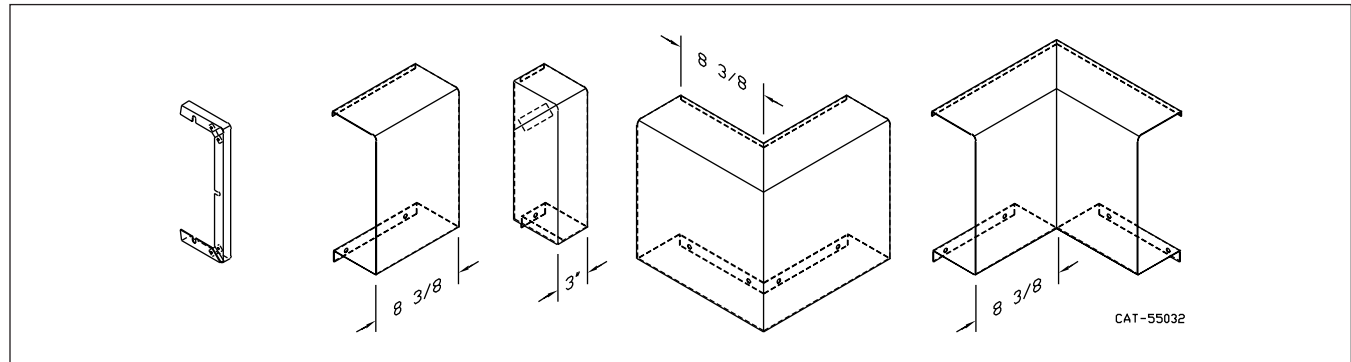

Design Data

Correction Factor Chart for Non-Standard Mounting Heights

| MOUNTING HEIGHT (Inches) | ENCLOSURE STYLE | | | | | | |
|--------------------------|--------------------|--------------|------------------|-------------|-------------|-------------|-------------|
| | BARE FIN ALL SIZES | FRONT OUTLET | FT (FRONT & TOP) | | SLOPE | | |
| | | | 3 1/4" FINS | 4 1/4" FINS | 2 3/4" FINS | 3 1/4" FINS | 4 1/4" FINS |
| 40 or more | 1.000 | 1.000 | 1.000 | 1.000 | 1.000 | 1.000 | 1.000 |
| 38 | 1.000 | 1.000 | 1.000 | 1.000 | 1.000 | 1.000 | 1.003 |
| 36 | 1.000 | 1.004 | 1.005 | 1.005 | 1.006 | 1.007 | 1.009 |
| 34 | 1.010 | 1.014 | 1.011 | 1.010 | 1.012 | 1.013 | 1.016 |
| 32 | 1.020 | 1.024 | 1.017 | 1.015 | 1.019 | 1.020 | 1.025 |
| 30 | 1.030 | 1.039 | 1.029 | 1.024 | 1.031 | 1.033 | 1.039 |
| 29 | 1.040 | 1.049 | 1.035 | 1.029 | 1.038 | 1.040 | 1.045 |
| 28 | 1.050 | 1.059 | 1.041 | 1.034 | 1.045 | 1.047 | 1.052 |
| 27 | 1.060 | 1.069 | 1.046 | 1.039 | 1.051 | 1.053 | 1.059 |
| 26 | 1.070 | 1.079 | 1.052 | 1.044 | 1.058 | 1.060 | 1.065 |
| 25 | 1.080 | 1.089 | 1.058 | 1.049 | 1.065 | 1.067 | 1.072 |
| 24 | 1.090 | 1.099 | 1.064 | 1.054 | 1.071 | 1.073 | 1.079 |
| 23 | 1.100 | 1.109 | 1.070 | 1.059 | 1.078 | 1.080 | 1.085 |
| 22 | 1.110 | 1.119 | 1.076 | 1.064 | 1.085 | 1.087 | 1.092 |
| 21 | 1.120 | 1.129 | 1.082 | 1.069 | 1.091 | 1.093 | 1.099 |
| 20 | 1.130 | 1.139 | 1.088 | 1.074 | 1.098 | 1.100 | 1.100 |
| 19 | 1.140 | 1.149 | 1.089 | 1.075 | 1.100 | 1.100 | 1.100 |
| 18 or less | 1.150 | 1.150 | 1.089 | 1.075 | 1.100 | 1.100 | 1.100 |

TOP OUTLET "T" IS NOT AFFECTED.

The AHRI Ratings cataloged include the factor shown for the recommended mounting height.

If the unit is to be installed at a different height than that recommended, the AHRI Rating (except for Top Outlet) must be adjusted as follows: AHRI Rating multiplied by

$$\frac{\text{Factor from Table Above for actual mounting height}}{\text{Factor from Table Above for recommended mounting height}}$$

FORMULA:

$$\text{Catalog Rating} \times \frac{\text{Factor at 30" Height}}{\text{Factor at 18" Height}}$$

$$\text{SOLUTION: } 1950 \times \frac{1.039}{1.150} = 1760 \text{ BTU/Hr.}$$

DYNAMIC FORMULAS

$$\text{BTU} = \text{GPM} \times 500 \times \text{TD}$$

$$\text{GPM} = \left(\frac{\text{BTU}}{500} \right) \div \text{TD}$$

$$\text{TD} = \left(\frac{\text{BTU}}{500} \right) \div \text{GPM}$$

Design Data

COMMERCIAL FINNED TUBE RATING CORRECTION CHARTS

CATALOG FINNED TUBE RATINGS ARE BASED UPON THE FOLLOWING CONDITIONS:


- 215°F AVERAGE WATER OR STEAM TEMPERATURE
- 65°F ENTERING AIR TEMPERATURE
- 3 FEET PER SECOND WATER FLOW RATE
- CATALOG MOUNTING HEIGHT

USE THE FOLLOWING CALCULATION WITH CORRECTION FACTORS FOR JOB CONDITIONS TO DETERMINE CORRECTED RATING:

$$\text{CORRECTED RATING} = (\text{215°F CATALOG RATING}) \times \left(\frac{\text{CORRECTION FACTOR FOR STEAM OR WATER AND AVERAGE AIR TEMP.}}{\quad} \right) \times \left(\frac{\text{CORRECTION FACTOR FOR FLOW RATE}}{\quad} \right) \times \left(\frac{\text{CORRECTION FOR MOUNTING HTG.-SEE CATALOG RATING}}{\quad} \right)$$

USE THE FOLLOWING CHARTS TO SELECT CORRECTION FACTORS

CHART/WATER VEL./CORR. FACTOR / PRESS. DROP/TOTAL BTU.

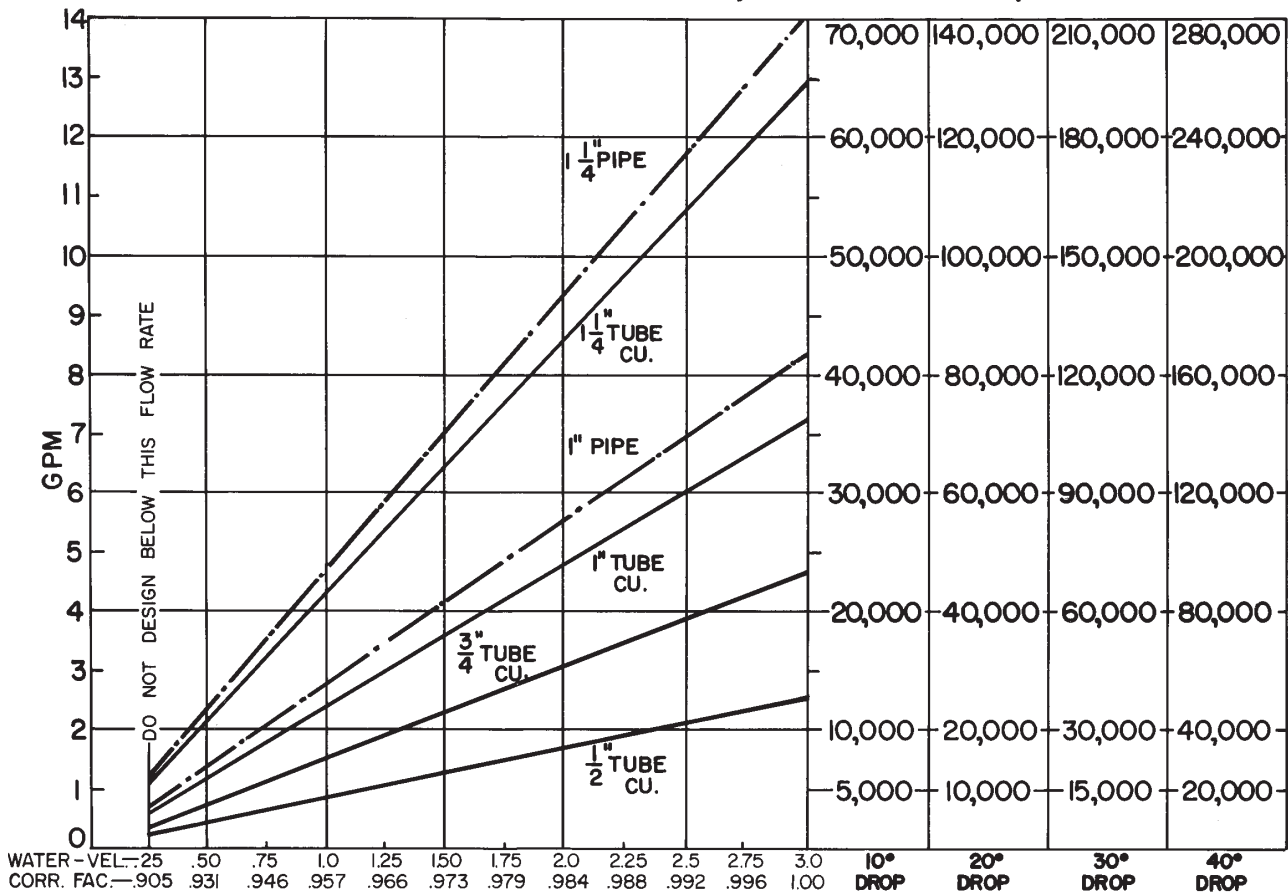


| | | | | | | | | | | | | | | | | |
|-----------------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|--|--|--|
| 1/2" COP. ALUM. | .180 | .233 | .333 | .533 | .916 | | | | | | | | | | | |
| 3/4" COP. ALUM. | .5 | | 1.5 | | 3.16 | 5.4 | 6.25 | | | | | | | | | |
| 1" COP. ALUM. | .233 | .41 | .83 | 1.45 | 2.16 | 2.83 | 3.66 | | | | | | | | | |
| 1" PIPE | | .37 | .79 | 1.3 | 2.00 | 2.70 | 3.70 | 4.80 | | | | | | | | |
| 1/4" COP. ALUM. | .16 | .33 | .55 | .79 | 1.08 | 1.33 | 1.8 | 2.25 | 2.26 | 2.91 | 3.3 | | | | | |
| 1/4" PIPE | .09 | .18 | .31 | .5 | .70 | 1.0 | 1.1 | 1.3 | 1.6 | 1.8 | 2.58 | 2.3 | 3.3 | | | |

PRESSURE DROP PER 100 LINEAR FT., IN FEET OF HEAD

Design Data

INLET AIR CORRECTION FACTOR

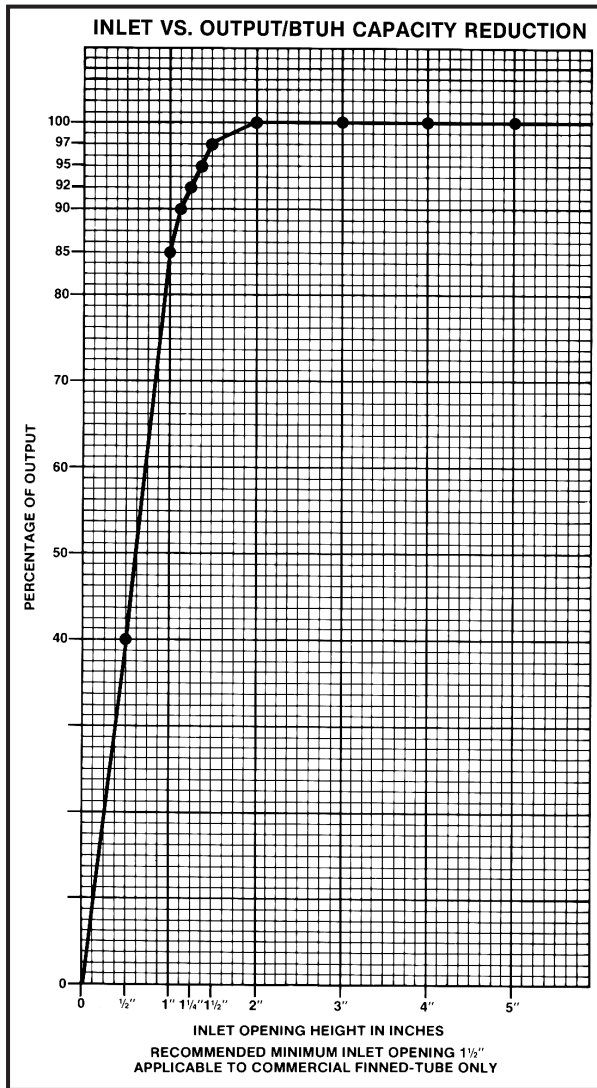

GUARANTEED WORKING PRESSURES


- 1" IPS — 780 AT TEMPERATURES UP TO 650°F.
 - 1 1/4" IPS — 660 AT TEMPERATURES UP TO 650°F.
 - 2" IPS — 405 AT TEMPERATURES UP TO 650°F.
 - 1 1/4" CU — 194 AT TEMPERATURES UP TO 300°F.
 - 1" CU — 204 AT TEMPERATURES UP TO 300°F.
 - 3/4" CU — 218 PSI AT TEMPERATURES UP TO 300°F.
- MAXIMUM PRESSURES AT OTHER TEMPERATURES ARE AVAILABLE UPON REQUEST.

RATE OF PITCH FOR STEAM 1/2" DROP OVER 20 FT. RUN.

| PIPE WATER CAPACITIES AND QUANTITIES CIRCULATED AT VELOCITY OF 3* FEET PER SECOND | | | |
|--------------------------------------------------------------------------------------|----------------------|----------------------------|--------------------------|
| Pipe Size | Gals. Per Linear Ft. | Gals./Min. @ 3' Sec. Vel.* | Lbs./Hr. @ 3' Sec. Vel.* |
| 1/2" | .016 | 2.88 | 1440 |
| 3/4" | .023 | 4.14 | 2070 |
| 1" | .040 | 7.20 | 3600 |
| 1 1/4" | .063 | 11.34 | 5660 |
| 1 1/2" | .102 | 18.36 | 9160 |
| 2" | .170 | 30.60 | 15300 |
| 2 1/2" | .275 | 49.50 | 24850 |
| 3" | .390 | 70.20 | 35000 |

*3 Ft./Sec. Velocity is Basic for Hot Water Rating Factors Shown on this Page.

$$\text{VELOCITY FT./SEC.} = \frac{\text{LBS. PER HOUR}}{(\text{GALS. PER FT.}) (3600) (8.3)}$$

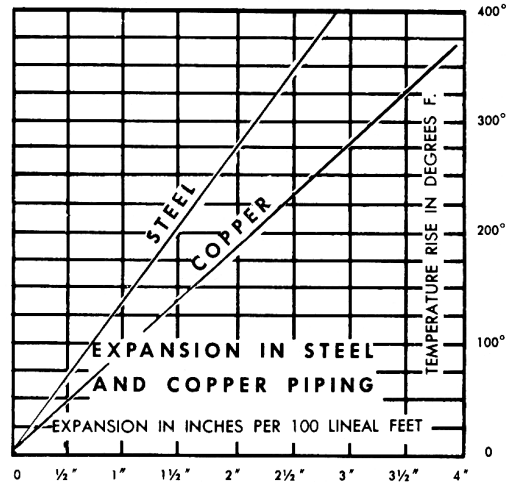

GLYCOL CORRECTION FACTORS

Fluid Temperature 200°F

| % Solution | Ethylene Glycol | Propylene Glycol |
|------------|-----------------|------------------|
| 20 | .952 | .988 |
| 30 | .921 | .968 |
| 40 | .888 | .943 |
| 50 | .852 | .912 |

Fluid Temperature 180°F

| % Solution | Ethylene Glycol | Propylene Glycol |
|------------|-----------------|------------------|
| 20 | .946 | .982 |
| 30 | .913 | .961 |
| 40 | .879 | .934 |
| 50 | .842 | .902 |

Fluid Temperature 140°F

| % Solution | Ethylene Glycol | Propylene Glycol |
|------------|-----------------|------------------|
| 20 | .934 | .97 |
| 30 | .898 | .946 |
| 40 | .861 | .916 |
| 50 | .821 | .881 |

ALTITUDE FACTORS

Approximate factors for convective heat value at varying altitudes

| Altitude | Ferrous Units | Copper Alum. Units |
|------------|---------------|--------------------|
| Sea Level | 1.000 | 1.000 |
| 1,000 ft. | .984 | .969 |
| 2,000 ft. | .968 | .938 |
| 3,000 ft. | .952 | .908 |
| 4,000 ft. | .936 | .878 |
| 5,000 ft. | .920 | .850 |
| 6,000 ft. | .904 | .822 |
| 7,000 ft. | .889 | .795 |
| 8,000 ft. | .874 | .768 |
| 9,000 ft. | .859 | .743 |
| 10,000 ft. | .844 | .718 |
| 15,000 ft. | .771 | .603 |
| 20,000 ft. | .703 | .502 |

Design Data

CORRECTION FACTORS FOR STEAM PRESSURES AND AIR TEMPERATURES OTHER THAN STANDARD

| STEAM | | ENTERING AIR TEMPERATURE, °F | | | | | | | | | | | | | | |
|--------------|----------|------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Pressure | | Temp. | | | STD | | | | | | | | | | | |
| Gauge | Abs. Psi | °F | 45 | 55 | 65 | 70 | 75 | 80 | 85 | 90 | 100 | 110 | 120 | 130 | 140 | 150 |
| (Vac) 15" Hg | 7.32 | 178.9 | 0.90 | 0.80 | 0.70 | 0.65 | 0.60 | 0.56 | 0.51 | 0.45 | 0.39 | 0.32 | 0.25 | 0.18 | 0.13 | 0.08 |
| (Vac) 10" | 9.78 | 192.2 | 1.02 | 0.91 | 0.81 | 0.76 | 0.71 | 0.66 | 0.62 | 0.55 | 0.48 | 0.40 | 0.33 | 0.26 | 0.20 | 0.14 |
| (Vac) 5" | 12.25 | 202.9 | 1.11 | 1.00 | 0.90 | 0.85 | 0.79 | 0.75 | 0.70 | 0.63 | 0.56 | 0.48 | 0.40 | 0.33 | 0.27 | 0.20 |
| (Vac) 0 Psi | 14.696 | 212.0 | 1.19 | 1.09 | 0.97 | 0.92 | 0.87 | 0.82 | 0.77 | 0.70 | 0.63 | 0.54 | 0.46 | 0.38 | 0.31 | 0.25 |
| ▶ .899 | 15.595 | 215.0 | 1.22 | 1.11 | 1.00 | 0.95 | 0.90 | 0.84 | 0.80 | 0.75 | 0.65 | 0.57 | 0.48 | 0.40 | 0.33 | 0.26 |
| 5 | 19.70 | 227.1 | 1.34 | 1.22 | 1.11 | 1.05 | 1.00 | 0.95 | 0.90 | 0.81 | 0.75 | 0.66 | 0.57 | 0.49 | 0.41 | 0.34 |
| 10 | 24.70 | 239.4 | 1.45 | 1.33 | 1.22 | 1.17 | 1.11 | 1.05 | 1.00 | 0.91 | 0.85 | 0.75 | 0.66 | 0.58 | 0.50 | 0.42 |
| 15 | 29.70 | 249.8 | 1.55 | 1.43 | 1.31 | 1.26 | 1.20 | 1.14 | 1.09 | 1.00 | 0.94 | 0.84 | 0.75 | 0.66 | 0.57 | 0.49 |
| 20 | 34.70 | 258.8 | 1.63 | 1.52 | 1.40 | 1.33 | 1.28 | 1.23 | 1.17 | 1.07 | 1.02 | 0.92 | 0.82 | 0.73 | 0.64 | 0.55 |
| 25 | 39.70 | 266.8 | 1.71 | 1.59 | 1.47 | 1.41 | 1.36 | 1.30 | 1.25 | 1.15 | 1.09 | 0.98 | 0.89 | 0.80 | 0.71 | 0.62 |
| 30 | 44.70 | 274.0 | 1.78 | 1.66 | 1.54 | 1.48 | 1.42 | 1.37 | 1.31 | 1.21 | 1.15 | 1.05 | 0.95 | 0.85 | 0.76 | 0.68 |
| 40 | 54.70 | 286.7 | 1.91 | 1.79 | 1.66 | 1.61 | 1.54 | 1.49 | 1.43 | 1.32 | 1.27 | 1.16 | 1.06 | 0.97 | 0.87 | 0.78 |
| 50 | 64.70 | 297.7 | 2.02 | 1.90 | 1.77 | 1.71 | 1.65 | 1.60 | 1.54 | 1.42 | 1.37 | 1.26 | 1.16 | 1.06 | 0.96 | 0.87 |
| 60 | 74.70 | 307.3 | 2.10 | 2.00 | 1.87 | 1.81 | 1.75 | 1.69 | 1.63 | 1.51 | 1.47 | 1.35 | 1.25 | 1.15 | 1.05 | 0.95 |
| 70 | 84.70 | 316.0 | 2.20 | 2.09 | 1.95 | 1.89 | 1.83 | 1.77 | 1.71 | 1.59 | 1.55 | 1.44 | 1.33 | 1.23 | 1.12 | 1.03 |
| 80 | 94.70 | 323.9 | 2.27 | 2.17 | 2.03 | 1.97 | 1.91 | 1.85 | 1.80 | 1.69 | 1.63 | 1.52 | 1.41 | 1.31 | 1.20 | 1.10 |
| 90 | 104.70 | 331.2 | 2.36 | 2.24 | 2.11 | 2.05 | 1.98 | 1.93 | 1.87 | 1.74 | 1.70 | 1.59 | 1.48 | 1.38 | 1.28 | 1.17 |
| 100 | 114.70 | 337.9 | 2.43 | 2.31 | 2.18 | 2.11 | 2.05 | 2.00 | 1.94 | 1.81 | 1.77 | 1.65 | 1.54 | 1.44 | 1.33 | 1.23 |
| 125 | 139.70 | 352.9 | 2.59 | 2.47 | 2.33 | 2.27 | 2.21 | 2.16 | 2.10 | 1.96 | 1.92 | 1.80 | 1.69 | 1.59 | 1.48 | 1.38 |
| 150 | 164.70 | 365.9 | 2.73 | 2.62 | 2.47 | 2.43 | 2.35 | 2.29 | 2.23 | 2.08 | 2.05 | 1.94 | 1.82 | 1.72 | 1.61 | 1.51 |
| 175 | 189.70 | 377.4 | 2.86 | 2.74 | 2.60 | 2.54 | 2.47 | 2.41 | 2.35 | 2.21 | 2.17 | 2.05 | 1.95 | 1.85 | 1.73 | 1.63 |
| 200 | 214.70 | 387.8 | 2.95 | 2.85 | 2.71 | 2.63 | 2.58 | 2.52 | 2.47 | 2.31 | 2.29 | 2.17 | 2.06 | 1.96 | 1.84 | 1.75 |

From Keenan and Keyes — Linear Interpolation.

Note: Gauge pressure should be corrected for altitude.

CORRECTION FACTORS FOR WATER TEMPERATURES AND AIR TEMPERATURES OTHER THAN STANDARD

| AVERAGE WATER TEMP. °F | ENTERING AIR TEMPERATURE, °F | | | | | | | | | | | | | | |
|------------------------|------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 45 | 55 | STD | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 110 | 120 | 130 | 140 | 150 |
| 90 | .19 | .13 | .11 | .06 | | | | | | | | | | | |
| 100 | .25 | .19 | .15 | .11 | .08 | .06 | | | | | | | | | |
| 110 | .31 | .25 | .20 | .16 | .13 | .11 | .08 | .06 | | | | | | | |
| 120 | .38 | .31 | .26 | .21 | .19 | .16 | .13 | .11 | .08 | .06 | | | | | |
| 130 | .45 | .38 | .33 | .28 | .25 | .21 | .19 | .16 | .13 | .11 | .06 | | | | |
| 140 | .53 | .45 | .40 | .34 | .31 | .28 | .25 | .21 | .19 | .16 | .11 | .06 | | | |
| 150 | .61 | .53 | .45 | .41 | .38 | .34 | .31 | .28 | .25 | .21 | .16 | .11 | .06 | | |
| 160 | .69 | .61 | .53 | .49 | .45 | .41 | .38 | .34 | .31 | .28 | .21 | .16 | .11 | .06 | |
| 170 | .77 | .69 | .61 | .57 | .53 | .49 | .45 | .41 | .38 | .34 | .28 | .21 | .16 | .11 | .06 |
| 180 | .86 | .77 | .69 | .65 | .61 | .57 | .53 | .49 | .45 | .41 | .34 | .28 | .21 | .16 | .11 |
| 190 | .95 | .86 | .78 | .73 | .69 | .65 | .61 | .57 | .53 | .49 | .41 | .34 | .28 | .21 | .16 |
| 200 | 1.05 | .95 | .86 | .82 | .77 | .73 | .69 | .65 | .61 | .57 | .49 | .41 | .34 | .28 | .21 |
| 210 | 1.14 | 1.05 | .95 | .91 | .86 | .82 | .77 | .73 | .69 | .65 | .57 | .49 | .41 | .34 | .28 |
| ▶ 215 (STD.) | 1.19 | 1.09 | 1.00 | .95 | .91 | .86 | .82 | .77 | .73 | .69 | .61 | .53 | .45 | .38 | .31 |
| 220 | 1.24 | 1.14 | 1.05 | 1.00 | .95 | .91 | .86 | .82 | .77 | .73 | .65 | .57 | .49 | .41 | .34 |
| 230 | 1.34 | 1.24 | 1.14 | 1.09 | 1.05 | 1.00 | .95 | .91 | .86 | .82 | .73 | .65 | .57 | .49 | .41 |
| 240 | 1.44 | 1.34 | 1.25 | 1.19 | 1.14 | 1.09 | 1.05 | 1.00 | .95 | .91 | .82 | .73 | .65 | .57 | .49 |
| 250 | 1.55 | 1.44 | 1.34 | 1.29 | 1.24 | 1.19 | 1.14 | 1.09 | 1.05 | 1.00 | .91 | .82 | .73 | .65 | .57 |
| 260 | 1.66 | 1.55 | 1.44 | 1.39 | 1.34 | 1.29 | 1.24 | 1.19 | 1.14 | 1.09 | 1.00 | .91 | .82 | .73 | .65 |
| 270 | 1.76 | 1.66 | 1.55 | 1.50 | 1.44 | 1.39 | 1.34 | 1.29 | 1.24 | 1.19 | 1.09 | 1.00 | .91 | .82 | .73 |
| 280 | 1.87 | 1.76 | 1.66 | 1.60 | 1.55 | 1.50 | 1.44 | 1.39 | 1.34 | 1.29 | 1.19 | 1.09 | 1.00 | .91 | .82 |
| 290 | 1.99 | 1.87 | 1.76 | 1.71 | 1.66 | 1.60 | 1.55 | 1.50 | 1.44 | 1.39 | 1.29 | 1.19 | 1.09 | 1.00 | .91 |
| 300 | 2.10 | 1.99 | 1.87 | 1.82 | 1.76 | 1.71 | 1.66 | 1.60 | 1.55 | 1.50 | 1.39 | 1.29 | 1.19 | 1.09 | 1.00 |