

# CLASSIC DAMPER

## COMMERCIAL FINNED TUBE RADIATION


### INSTALLATION INSTRUCTIONS

1. Place enclosure on bench or horses.
2. Place damper operator assembly ① in position as shown, aligning 1/4 dia. holes with 1/4 dia. holes in channel which is attached to enclosure front. Fasten operator assembly in place with (2) plastic fasteners 2 through operator assembly and channel, using pre-punched holes.
3. Insert damper blade between end gussets, aligning bead with hole shown. Bead and bottom lip of blade must face forward as shown. Hammer drive pins ③ through gusset into blade bead at each end.

NOTE: On damper blades 6'-0" and longer an additional drive pin ③ must be used approximately at center - as shown.

4. Align twist screw of damper operator assembly with slot hinged operating tab of damper blade assembly. Thread twist screw into operating tab slot. DAMPER IS NOW OPERABLE.

### GENERAL LAYOUT

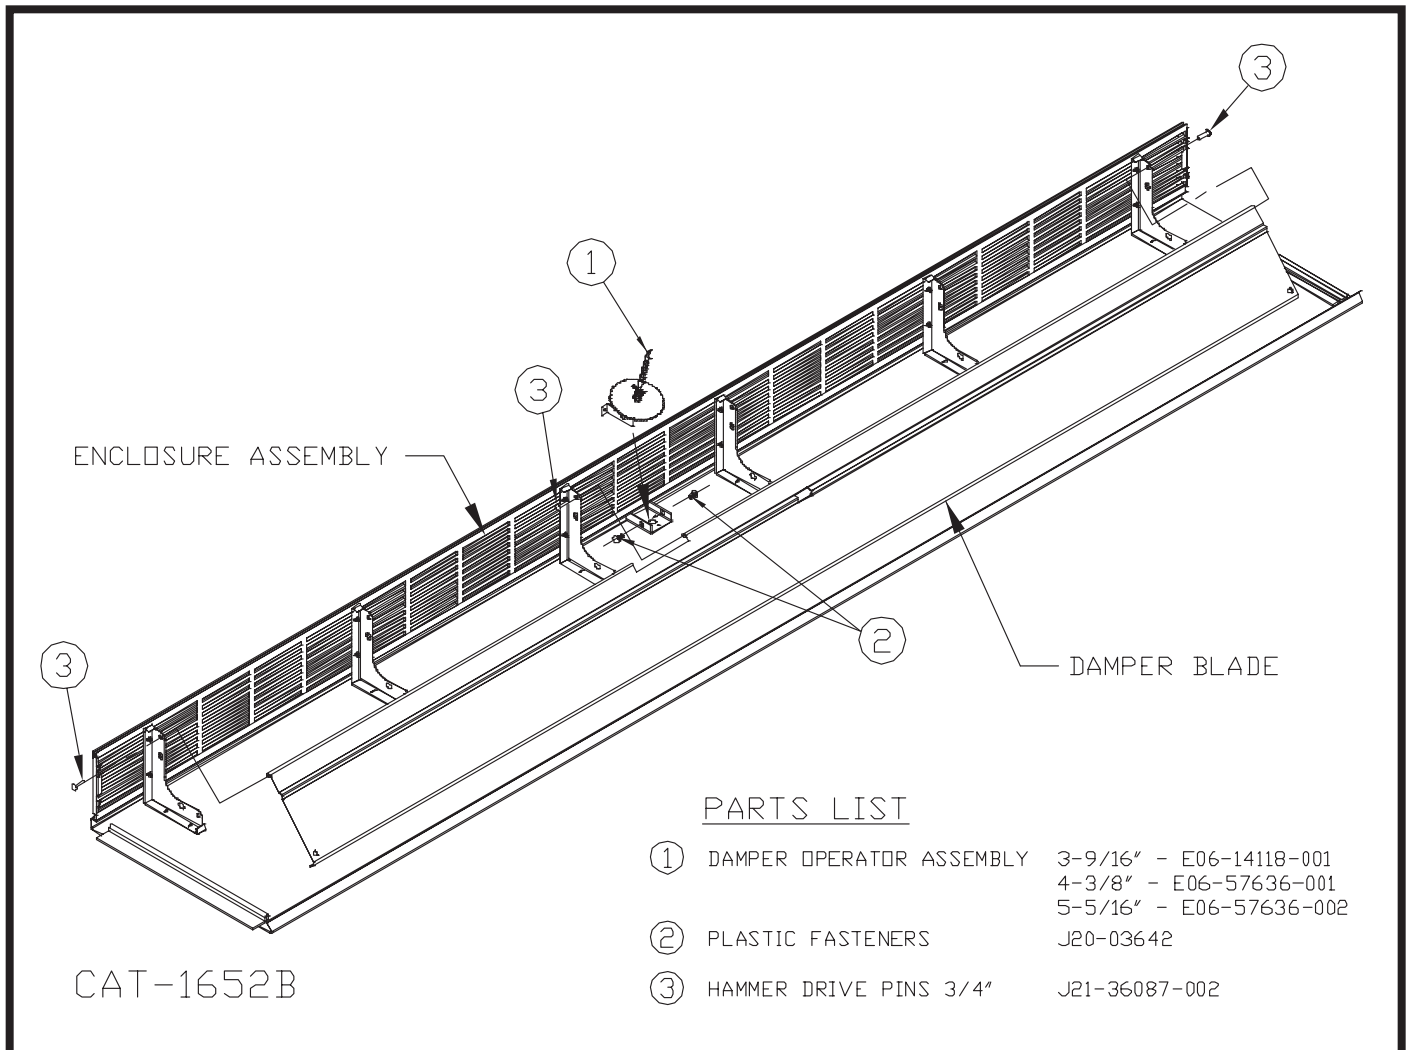

**Vulcan**  
RADIATOR

260 NORTH ELM ST., WESTFIELD, MA 01085  
TEL: (413) 568-9571 FAX: (413) 564-5661