

**Low Temperature Heating/Cooling Fan Coil**

**STANDARD FEATURES**

- Low Temperature
- Quiet Modern Space-Saving Design
- Heating and Cooling
- Hydronic Based - No Refrigerant
- Remote Control
- ECM Blower
- Glass Front and Touch Screen Controller



**Optional Equipment**

**Floor Stand Supports** Qty. \_\_\_\_\_



Model		HTW-87	HTW-135	HTW-196
Heating Capacity*	BTU/H	8700	13500	19600
Water Flow Rate	GPM	1.0	1.5	2.2
Pressure Drop	PSI	1.5	1.8	3.8
Cooling Capacity**	TONS	1/4	1/2	3/4
Water Flow Rate	GPM	0.8	1.5	1.9
Pressure Drop***	PSI	1.6	1.9	4
Air Volume	CFM	94	188	270
Noise	DB (A)	30	32	37
Power Supply		120V/1PH/60Hz		
Power Input	W	12	16	20
Water In/Out	NPT	3/4		
Drain	INCH	5/8		
Net Dimensions	Length	27-1/2	35-1/2	43-3/8
	Width	5 1/8		
	Height (with feet)****	27 5/8		
Shipping Dimensions	Length	29-1/8	37	44-7/8
	Width	7-1/8		
	Height	28-11/16		
Net Weight	LBS	35	44	53
Ship Weight	LBS	40	51	60

\* Heating: Entering Water Temp. 158°F

\*\* Cooling: Entering Water Temp. 45°F

\*\*\* PSI x 2.31 = Ft/Head

\*\*\*\* If not using feet accessory subtract 3.5" from total height and maintain clearances as noted in installation manual



260 North Elm St., Westfield, MA 01085  
(800) 465-8558

7555 Tranmere Drive, Mississauga, ONT. L5S 1L4 Canada  
(905) 670-5888

www.spacepak.com

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

LOCATION: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

SUBMITTED BY: \_\_\_\_\_


FOR:  Reference  Approval  Construction

UNIT DESIGNATION: \_\_\_\_\_

SCHEDULE NUMBER: \_\_\_\_\_

# SUBMITTAL DATA: HYDRONIC THINWALL FAN COIL - HTW

## Overall Dimensions (Inches)

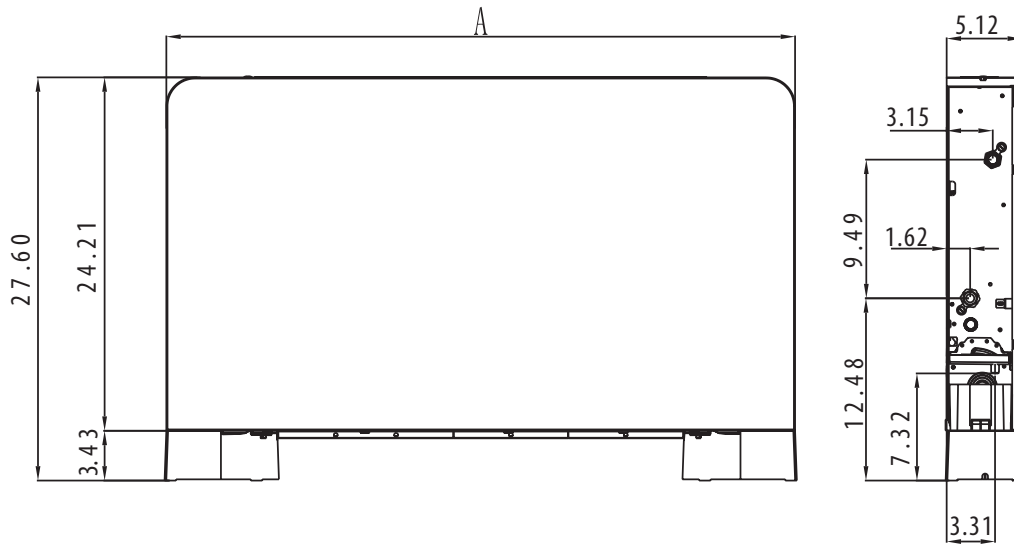

Unit Model	HTW-87	HTW-135	HTW-196
A(inch)	27.36	35.24	43.11

Model	Output (BTU/h)					
	Heating			Cooling		
	Entering Water Temperature					
	120°F	140°F	160°F	45°F	47°F	50°F
HTW-87	4600	6936	8700	3400	2846	2505
HTW-135	8500	10710	13500	6500	5442	4789
HTW-196	11400	15606	19600	8500	7116	6262