Formed Steel Louver • 6" Deep • 30° Straight Blades • Stationary • Galvanized Steel

Page 1

Standard Construction and Materials

FRAME: 18-GA. galvanized steel, channel or flanged type.

BLADE: 18-GA. galvanized steel. Blades approximately 4" on centers.

Louver Width (in.)

SCREEN: (When indicated)

½" sq. mesh, 19-GA. galvanized steel (.041").

CONSTRUCTION: Riveted and/or welded, full jambs with blades, head and sill

contained within.

Options

Frames and Blades of other gauges

Material - 304 or 316 Stainless steel, Copper, Aluminum, etc.

Finishes - Enamels, Epoxies, etc.

Screens - Insect screen 18/16 aluminum mesh,


- -or- 1/2" flattened aluminum, .051",
- -or- 1/4" sq. mesh, 18-GA galvanized steel, 047",
- -or- ½" sq. mesh, 18-GA stainless steel, .047",

Others available.

Notes

- 1. ½" nominal deduction will be made to the opening size given.
- 2. Approximate shipping weight is 11.0 lbs./sq.ft.

Louver Sizes

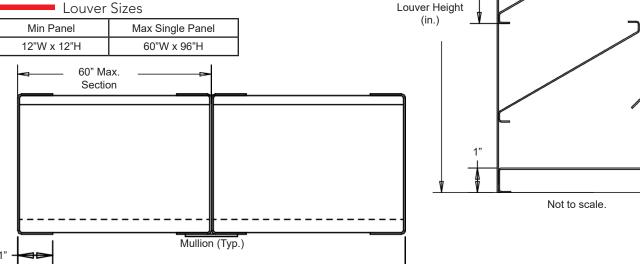



| <u>ltem #</u> | <u>Oty</u> | Width | Height | Width | Height | N 4 III: | Туре | Location | | | OO NA |
|--------------------|------------|--------------|--------|--------------------|--------|----------|----------------|----------|--|-------------|-------------------|
| | | Opening Size | | <u>Louver Size</u> | | Mullion | <u>Screens</u> | | | | <u>Union Made</u> |
| Arch. / Eng.: | | | | | | EDR: | | ECN: | | <u>Job:</u> | |
| <u>Contractor:</u> | | | | | | | | | | | |
| Project: | | | | | | Date: | | DWN: | | DWG: | |

In the interest of product development, Cesco Products reserves the right to make changes without notice.

