## STANDARD CONSTRUCTION

**FRAME:** 18-GA. galvanized steel, channel or flanged type.

BLADE: 18-GA. galvanized steel. Blades approximately 3" on centers.

SCREEN: (when indicated)

½" sq. mesh, 19-GA. galvanized steel, .041".

**CONSTRUCTION:** Riveted and/or welded for maximum service.

## **OPTIONS**

Frames and Blades of other gauges

Materials - 304 or 316 Stainless steel, Copper, Aluminum, etc.

Finishes - Enamels, Epoxies, etc.

Screens - Insect screen 18/14 aluminum mesh,

-or- 1/2" flattened aluminum, .051",


-or- 1/4" sq. mesh, 18-GA galvanized steel, .047",


-or- ½" sq. mesh, 18-GA stainless steel, .047",


Others available.

## **NOTES**

- 1. Nominal deductions will be made to the opening size given.
- 2. Approximate shipping weight is 10 lbs./sq.ft.

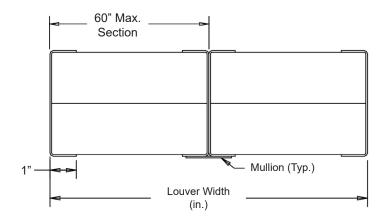

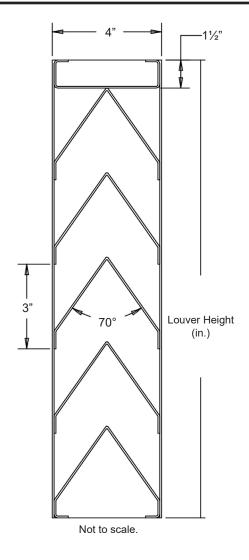



Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location			
		<b>Opening Size</b>		Louver Size		Mullion	Screens				<b>Union Made</b>
Arch. / Eng. :											
Arch. /	Eng. :					EDR:		ECN:		Job:	
	Eng. : actor:					EDR:		ECN:		Job:	

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

